




# OIL ANALYSIS REPORT



Area  
**(BD49686) {UNASSIGNED}**  
 Machine Id  
**914022**  
 Component  
**1 Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (9 GAL)**

Sample Rating Trend

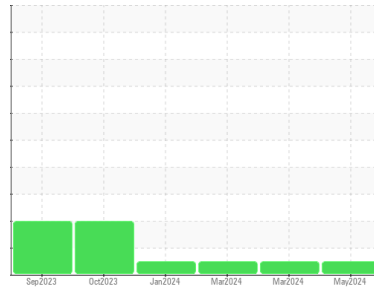

**NORMAL**



## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0115203</b>	GFL0115165	GFL0115178
Sample Date	Client Info		<b>22 May 2024</b>	24 Mar 2024	18 Mar 2024
Machine Age	hrs	Client Info	<b>2980</b>	2382	2332
Oil Age	hrs	Client Info	<b>598</b>	649	599
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>10</b>	1	15
Chromium	ppm	ASTM D5185m >20	<b>0</b>	<1	1
Nickel	ppm	ASTM D5185m >5	<b>1</b>	<1	2
Titanium	ppm	ASTM D5185m >2	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	<1
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	2	2
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	0	<1
Copper	ppm	ASTM D5185m >330	<b>2</b>	0	10
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	0	1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	<1

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>1</b>	2	3
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	<1
Molybdenum	ppm	ASTM D5185m 60	<b>58</b>	52	56
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m 1010	<b>942</b>	912	905
Calcium	ppm	ASTM D5185m 1070	<b>1036</b>	972	991
Phosphorus	ppm	ASTM D5185m 1150	<b>1022</b>	1003	1052
Zinc	ppm	ASTM D5185m 1270	<b>1245</b>	1201	1175
Sulfur	ppm	ASTM D5185m 2060	<b>3256</b>	3465	2966

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>4</b>	2	5
Sodium	ppm	ASTM D5185m	<b>4</b>	<1	3
Potassium	ppm	ASTM D5185m >20	<b>3</b>	2	2

## INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>0.4</b>	0.1	0.4
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.7</b>	4.9	8.1
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>19.5</b>	17.8	20.0

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>15.6</b>	13.9	17.1
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>7.5</b>	8.7	6.2







# OIL ANALYSIS REPORT

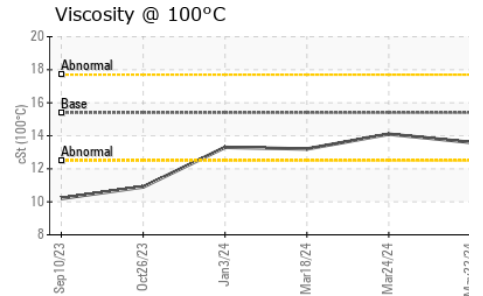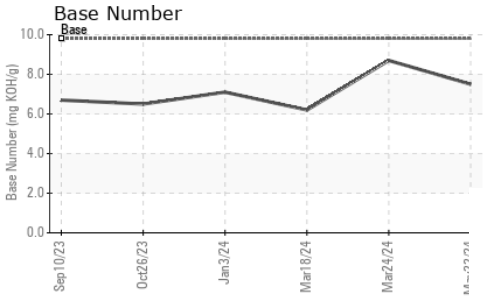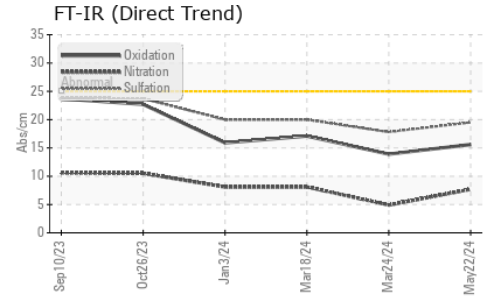

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.6	14.1

## GRAPHS

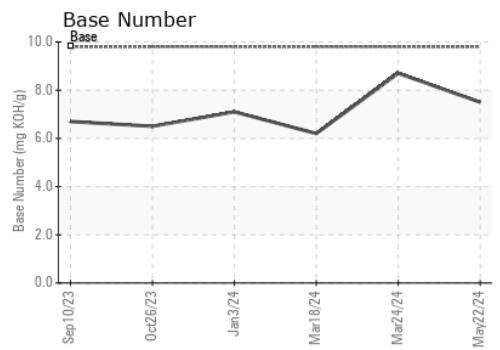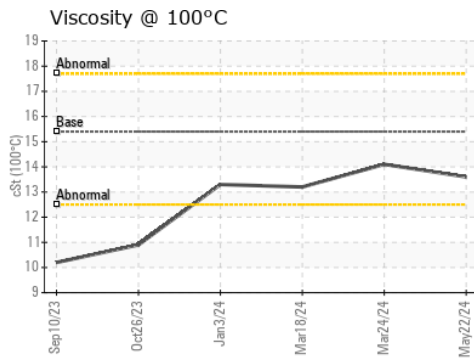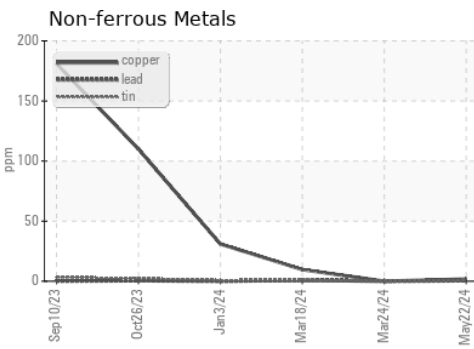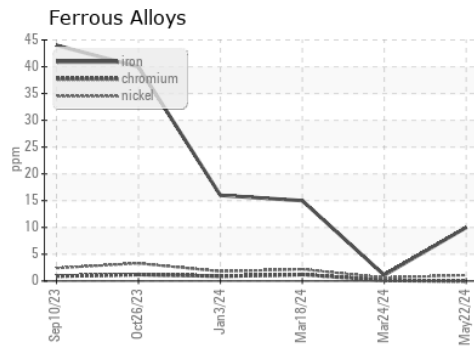

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0115203  
**Lab Number** : 06193399  
**Unique Number** : 11050151  
**Test Package** : FLEET  
**Received** : 28 May 2024  
**Tested** : 30 May 2024  
**Diagnosed** : 30 May 2024 - Wes Davis

**GFL Environmental - 405 - Arbor Hills**  
 7811 Chubb Rd  
 NORTHVILLE, MI  
 US 48168  
 Contact: Anthony Hopkins  
 ahopkins@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)