


# **OIL ANALYSIS REPORT**

# (69957Z) Walgreens - Tractor [Walgreens - Tractor] 136A624235

**Diesel Engine** 

PETRO CANADA DURON SHP 10W30 (11 G

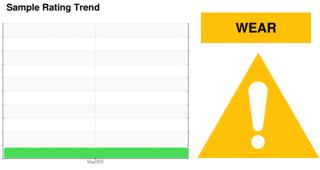

## DIAGNOSIS

#### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

## Wear

The copper level is abnormal. In the absence of other significant wear metals, suspect copper due to sources other than wear (i.e. cooling core). All other component wear rates are normal.

#### Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. No other contaminants were detected in the oil.


### **Fluid Condition**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

| GAL)                      |          |                     |               | May2024             |          |          |
|---------------------------|----------|---------------------|---------------|---------------------|----------|----------|
| SAMPLE INFORM             | MATION   | method              | limit/base    | current             | history1 | history2 |
|                           | VIATION  |                     | IIIIIIIIIIIII |                     | ,        | HIStory2 |
| Sample Number             |          | Client Info         |               | PCA0121335          |          |          |
| Sample Date               | and a    | Client Info         |               | 17 May 2024         |          |          |
| Machine Age               | mls      | Client Info         |               | 96508               |          |          |
| Oil Age                   | mls      | Client Info         |               | 96508<br>Not Changd |          |          |
| Oil Changed Sample Status |          | Ciletit iriio       |               | ABNORMAL            |          |          |
| CONTAMINAT                | ION      | method              | limit/base    | current             | history1 | history2 |
| Fuel                      | ION      |                     |               |                     |          |          |
| Water                     |          | WC Method           | >5            | <1.0<br>NEG         |          |          |
|                           |          | WC Method WC Method | >0.2          | NEG                 |          |          |
| Glycol                    |          |                     |               | NEG                 |          |          |
| WEAR METAL                | S        | method              | limit/base    | current             | history1 | history2 |
| Iron                      | ppm      | ASTM D5185m         | >80           | 32                  |          |          |
| Chromium                  | ppm      | ASTM D5185m         | >5            | 4                   |          |          |
| Nickel                    | ppm      | ASTM D5185m         | >2            | 0                   |          |          |
| Titanium                  | ppm      | ASTM D5185m         |               | 0                   |          |          |
| Silver                    | ppm      | ASTM D5185m         | >3            | <1                  |          |          |
| Aluminum                  | ppm      | ASTM D5185m         | >30           | 24                  |          |          |
| Lead                      | ppm      | ASTM D5185m         | >30           | 1                   |          |          |
| Copper                    | ppm      | ASTM D5185m         | >150          | <u> </u>            |          |          |
| Tin                       | ppm      | ASTM D5185m         | >5            | <1                  |          |          |
| Vanadium                  | ppm      | ASTM D5185m         |               | <1                  |          |          |
| Cadmium                   | ppm      | ASTM D5185m         |               | 0                   |          |          |
| ADDITIVES                 |          | method              | limit/base    | current             | history1 | history2 |
| Boron                     | ppm      | ASTM D5185m         | 2             | 0                   |          |          |
| Barium                    | ppm      | ASTM D5185m         | 0             | 0                   |          |          |
| Molybdenum                | ppm      | ASTM D5185m         | 50            | 57                  |          |          |
| Manganese                 | ppm      | ASTM D5185m         | 0             | 2                   |          |          |
| Magnesium                 | ppm      | ASTM D5185m         | 950           | 889                 |          |          |
| Calcium                   | ppm      | ASTM D5185m         | 1050          | 1313                |          |          |
| Phosphorus                | ppm      | ASTM D5185m         | 995           | 972                 |          |          |
| Zinc                      | ppm      | ASTM D5185m         | 1180          | 1166                |          |          |
| Sulfur                    | ppm      | ASTM D5185m         | 2600          | 2622                |          |          |
| CONTAMINAN                | TS       | method              | limit/base    | current             | history1 | history2 |
| Silicon                   | ppm      | ASTM D5185m         | >20           | 4                   |          |          |
| Sodium                    | ppm      | ASTM D5185m         |               | 2                   |          |          |
| Potassium                 | ppm      | ASTM D5185m         | >20           | 59                  |          |          |
| INFRA-RED                 |          | method              | limit/base    | current             | history1 | history2 |
| Soot %                    | %        | *ASTM D7844         | >3            | 0.4                 |          |          |
| Nitration                 | Abs/cm   | *ASTM D7624         | >20           | 8.7                 |          |          |
| Sulfation                 | Abs/.1mm | *ASTM D7415         | >30           | 20.1                |          |          |
| FLUID DEGRAD              | NOITAC   | method              | limit/base    | current             | history1 | history2 |
| Oxidation                 | Abs/.1mm | *ASTM D7414         | >25           | 18.2                |          |          |
| Base Number (BN)          | mg KOH/g | ASTM D2896          |               | 6.6                 |          |          |



# **OIL ANALYSIS REPORT**

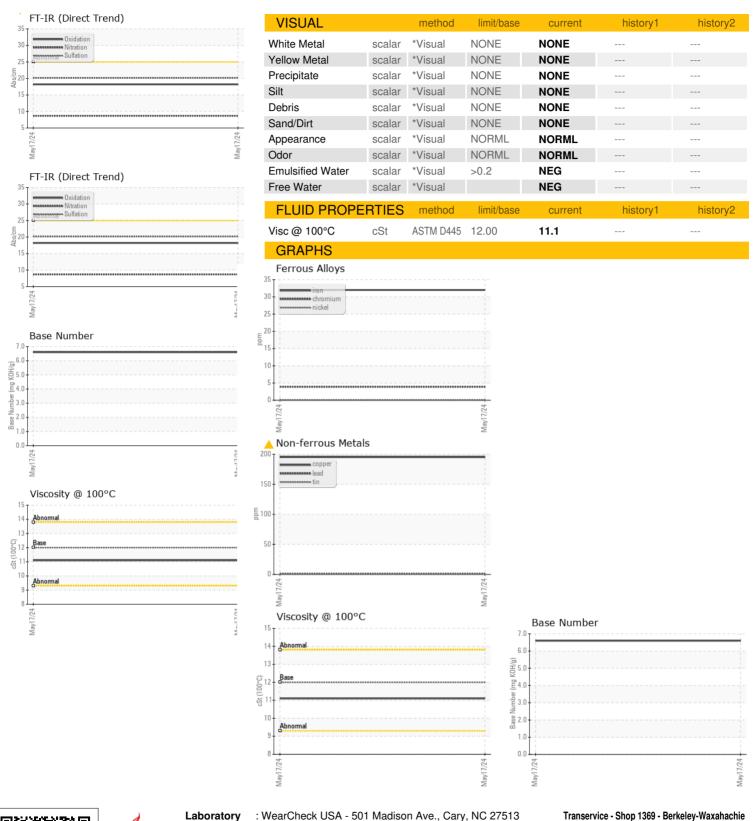



Certificate 12367

Sample No.

: PCA0121335 Lab Number : 06193517 Unique Number : 11050269 Test Package : FLEET

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 29 May 2024 Tested : 30 May 2024

Diagnosed : 30 May 2024 - Sean Felton

710 Ovilla Road Waxahachie, TX US 75167 Contact: Robert Beal

rbeal@transervice.com T: (972)923-9928

To discuss this sample report, contact Customer Service at 1-800-237-1369.

 $^st$  - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (972)923-9919