




OIL ANALYSIS REPORT

Sample Rating Trend

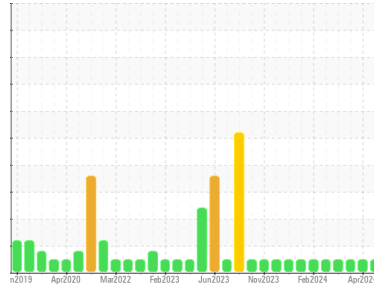

NORMAL



Machine Id
722021-310026

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0120142	GFL0117161	GFL0114048
Sample Date	Client Info	24 May 2024	23 Apr 2024	22 Mar 2024
Machine Age	hrs	20649	20507	22801
Oil Age	hrs	0	0	0
Oil Changed	Client Info	Not Changed	Not Changed	Not Changed
Sample Status		NORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<1.0	<1.0	<1.0
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >110	35	22	<1
Chromium	ppm	ASTM D5185m >4	4	2	0
Nickel	ppm	ASTM D5185m >2	1	1	0
Titanium	ppm	ASTM D5185m	<1	<1	0
Silver	ppm	ASTM D5185m >2	1	<1	0
Aluminum	ppm	ASTM D5185m >25	6	3	<1
Lead	ppm	ASTM D5185m >45	1	2	0
Copper	ppm	ASTM D5185m >85	2	4	<1
Tin	ppm	ASTM D5185m >4	1	1	0
Vanadium	ppm	ASTM D5185m	<1	<1	<1
Cadmium	ppm	ASTM D5185m	<1	<1	0

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 0	3	4	13
Barium	ppm	ASTM D5185m 0	0	<1	0
Molybdenum	ppm	ASTM D5185m 60	57	60	56
Manganese	ppm	ASTM D5185m 0	1	1	0
Magnesium	ppm	ASTM D5185m 1010	850	867	943
Calcium	ppm	ASTM D5185m 1070	1078	1072	1138
Phosphorus	ppm	ASTM D5185m 1150	938	926	937
Zinc	ppm	ASTM D5185m 1270	1119	1154	1301
Sulfur	ppm	ASTM D5185m 2060	3108	3057	3781

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >30	17	8	2
Sodium	ppm	ASTM D5185m	5	5	2
Potassium	ppm	ASTM D5185m >20	9	4	2

INFRA-RED

method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844 >3	0.5	0.9	0.1
Nitration	Abs/cm	*ASTM D7624 >20	8.7	10.2	4.8
Sulfation	Abs/.1mm	*ASTM D7415 >30	19.2	20.8	17.5


FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414 >25	16.0	17.9	13.7
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	8.3	8.1	8.9




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

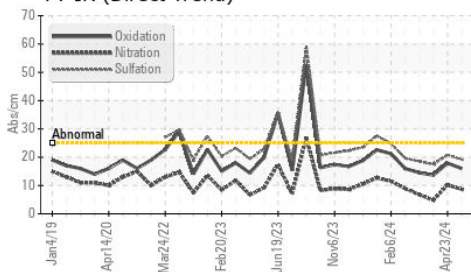

Base Number

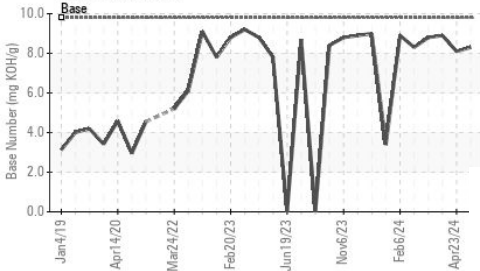

Viscosity @ 100°C

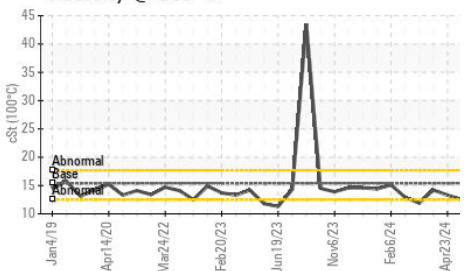


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	12.5	13.3

GRAPHS


Ferrous Alloys

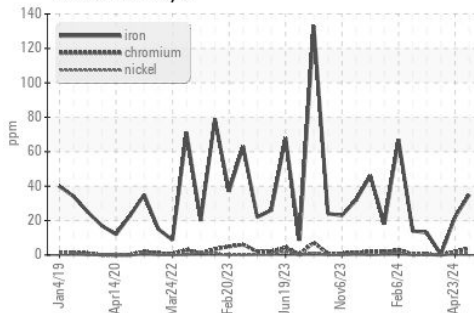


Non-ferrous Metals

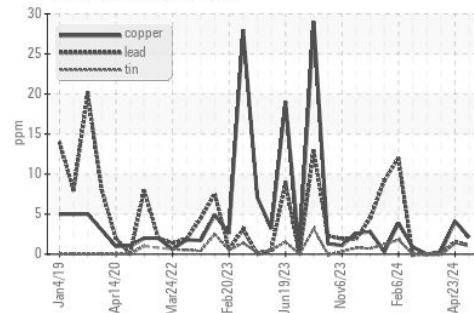

Viscosity @ 100°C

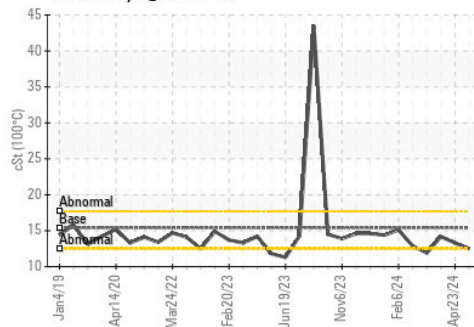

Base Number

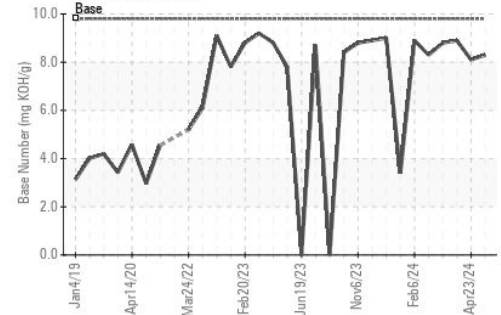

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : GFL0120142
 Lab Number : 06193662
 Unique Number : 11050414
 Test Package : FLEET

Received : 29 May 2024
 Tested : 30 May 2024
 Diagnosed : 30 May 2024 - Sean Felton

GFL Environmental - 836 - Kansas City Hauling
 7801 East Truman Road
 Kansas City, MO
 US 64126
 Contact: Loyce Stewart
 loyce.stewart@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)