




OIL ANALYSIS REPORT



Area
(48044UA)
Machine Id
934033
Component
Natural Gas Engine
Fluid
DIESEL ENGINE OIL SAE 40 (--- GAL)

Sample Rating Trend

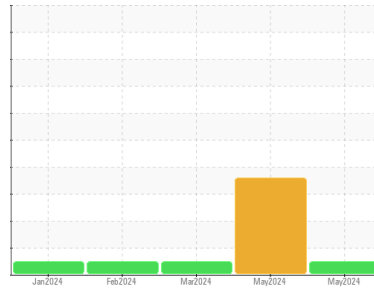

NORMAL



DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DIESEL ENGINE OIL SAE 40. Please confirm.

Wear

All component wear rates are normal.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0122058	GFL0116596	GFL0111857
Sample Date	Client Info		23 May 2024	14 May 2024	07 Mar 2024
Machine Age	hrs	Client Info	1323	1323	753
Oil Age	hrs	Client Info	1323	1323	753
Oil Changed	Client Info		Not Chngd	Not Chngd	Not Chngd
Sample Status			NORMAL	ABNORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	16	▲ 83	61
Chromium	ppm	ASTM D5185m >5	<1	3	2
Nickel	ppm	ASTM D5185m >4	0	2	2
Titanium	ppm	ASTM D5185m >5	0	<1	<1
Silver	ppm	ASTM D5185m >3	<1	0	<1
Aluminum	ppm	ASTM D5185m >25	11	36	22
Lead	ppm	ASTM D5185m >40	1	4	2
Copper	ppm	ASTM D5185m >150	3	19	18
Tin	ppm	ASTM D5185m >4	1	2	2
Vanadium	ppm	ASTM D5185m	0	0	<1
Cadmium	ppm	ASTM D5185m	0	0	<1

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	24	0	7
Barium	ppm	ASTM D5185m 10	0	3	0
Molybdenum	ppm	ASTM D5185m 100	50	68	61
Manganese	ppm	ASTM D5185m	2	13	11
Magnesium	ppm	ASTM D5185m 450	621	937	805
Calcium	ppm	ASTM D5185m 3000	1514	1565	1324
Phosphorus	ppm	ASTM D5185m 1150	802	884	778
Zinc	ppm	ASTM D5185m 1350	929	1105	972
Sulfur	ppm	ASTM D5185m 4250	2752	2837	2490

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	8	▲ 31	32
Sodium	ppm	ASTM D5185m >216	6	8	5
Potassium	ppm	ASTM D5185m >20	15	62	50

INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	0	0.1	0
Nitration	Abs/cm	*ASTM D7624 >20	9.2	14.2	12.8
Sulfation	Abs/.1mm	*ASTM D7415 >30	20.2	29.4	24.3

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	17.4	29.5	22.4
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	7.3	▲ 1.8	3.6







OIL ANALYSIS REPORT

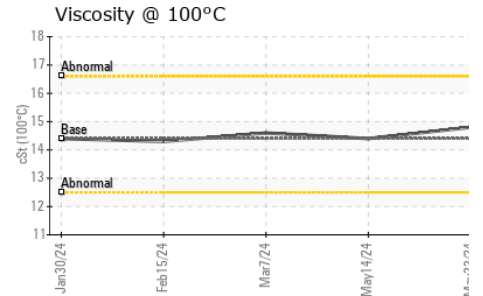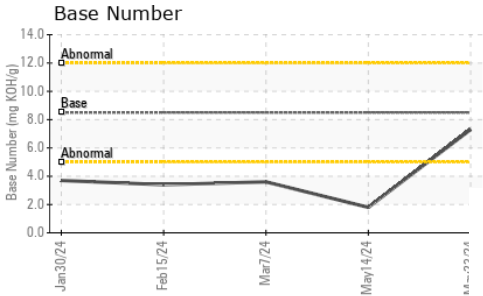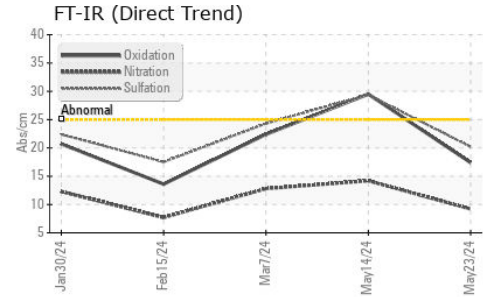

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	14.8	14.4	14.6

GRAPHS

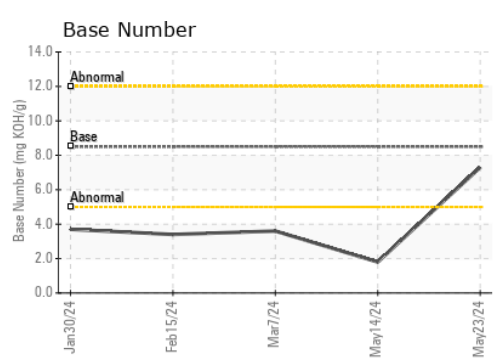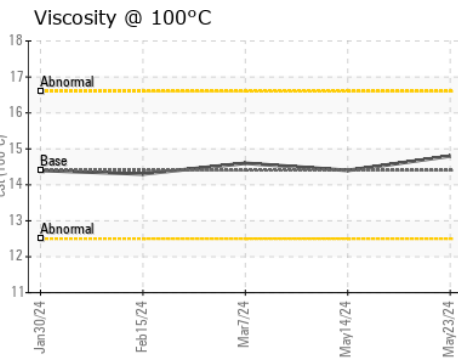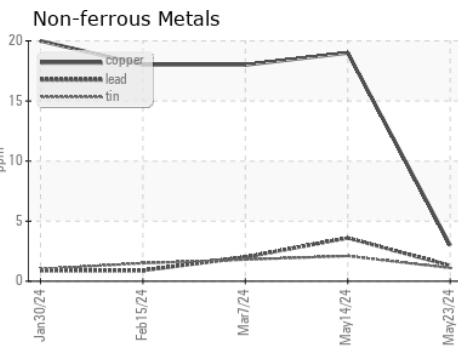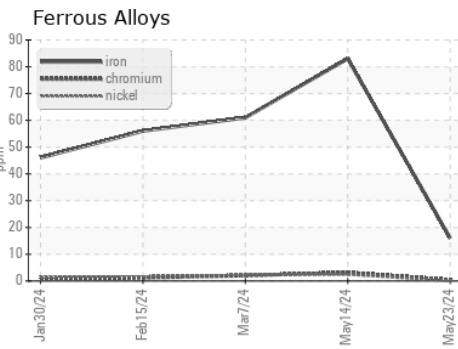

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0122058 **Received** : 29 May 2024
Lab Number : 06193829 **Tested** : 30 May 2024
Unique Number : 11055952 **Diagnosed** : 30 May 2024 - Wes Davis
Test Package : FLEET

GFL Environmental - 652 - Fredericksburg Hauling
 10954 Houser Drive
 Fredericksburg, VA
 US 22408
 Contact: WILLIAM MILO
 wmilo@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)