




OIL ANALYSIS REPORT

Sample Rating Trend

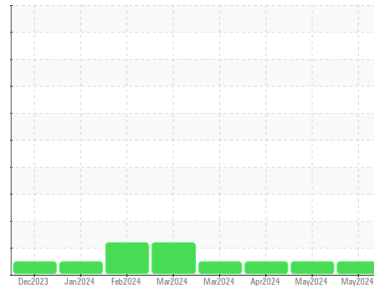

NORMAL



Machine Id
934037
 Component
Natural Gas Engine
 Fluid
PETRO CANADA 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0122059	GFL0116553	GFL0111875
Sample Date	Client Info		23 May 2024	03 May 2024	16 Apr 2024
Machine Age	hrs	Client Info	1344	1172	1031
Oil Age	hrs	Client Info	1056	1025	147
Oil Changed	Client Info		Not Changed	Not Changed	Not Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	14	15	13
Chromium	ppm	ASTM D5185m >4	<1	1	1
Nickel	ppm	ASTM D5185m >2	0	1	2
Titanium	ppm	ASTM D5185m	0	<1	<1
Silver	ppm	ASTM D5185m >3	<1	0	<1
Aluminum	ppm	ASTM D5185m >9	5	4	3
Lead	ppm	ASTM D5185m >30	1	2	2
Copper	ppm	ASTM D5185m >35	2	3	3
Tin	ppm	ASTM D5185m >4	1	2	2
Vanadium	ppm	ASTM D5185m	0	<1	<1
Cadmium	ppm	ASTM D5185m	0	<1	1

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	7	15	26
Barium	ppm	ASTM D5185m	0	0	<1
Molybdenum	ppm	ASTM D5185m	51	54	50
Manganese	ppm	ASTM D5185m	2	3	3
Magnesium	ppm	ASTM D5185m	578	579	552
Calcium	ppm	ASTM D5185m	1575	1571	1506
Phosphorus	ppm	ASTM D5185m	726	789	819
Zinc	ppm	ASTM D5185m	960	977	924
Sulfur	ppm	ASTM D5185m	2660	2692	2762

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >+100	8	8	7
Sodium	ppm	ASTM D5185m	7	6	5
Potassium	ppm	ASTM D5185m >20	9	6	5

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	0	0	0
Nitration	Abs/cm	*ASTM D7624 >20	11.7	10.7	8.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	22.0	20.0	19.8


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	19.2	17.9	17.0
Base Number (BN)	mg KOH/g	ASTM D2896	4.8	5.7	7.8




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

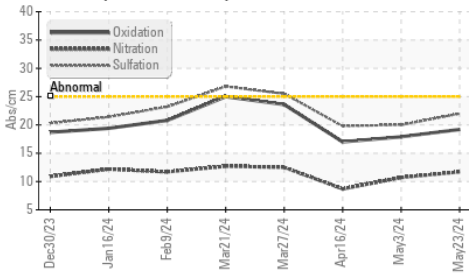

Base Number

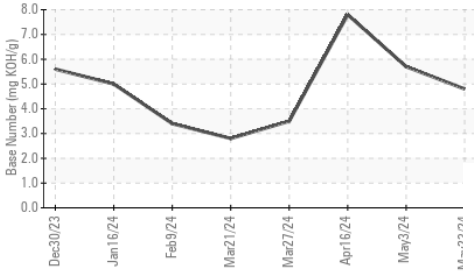

Viscosity @ 100°C

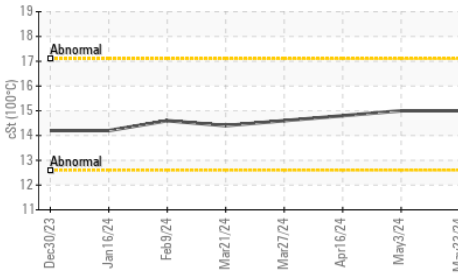


PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.0	15.0	14.8

GRAPHS


Ferrous Alloys

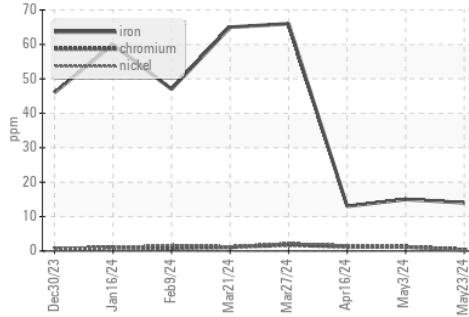


Non-ferrous Metals

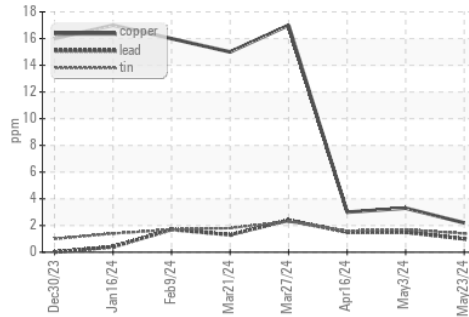

Viscosity @ 100°C

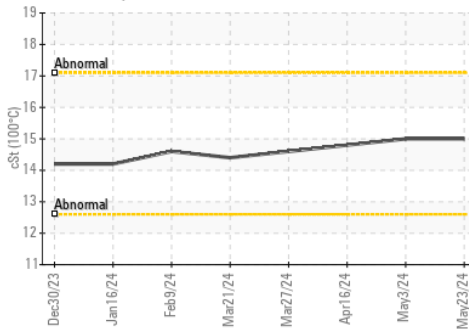

Base Number

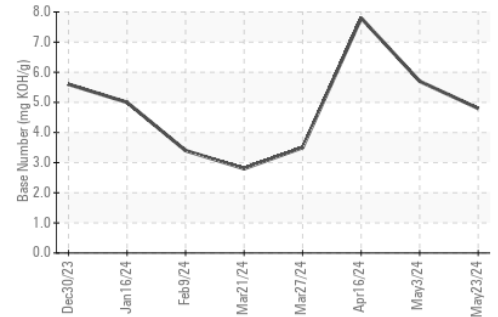

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0122059
Lab Number : 06193835
Unique Number : 11055958
Test Package : FLEET

Received : 29 May 2024
Tested : 30 May 2024
Diagnosed : 30 May 2024 - Wes Davis

GFL Environmental - 652 - Fredericksburg Hauling
 10954 Houser Drive
 Fredericksburg, VA
 US 22408
 Contact: WILLIAM MILO
 wmilo@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: