




# OIL ANALYSIS REPORT

Sample Rating Trend

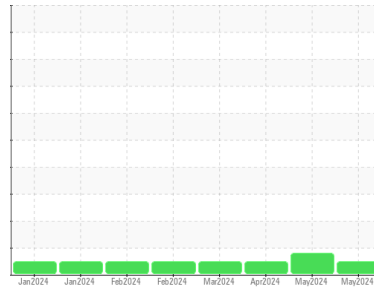

**NORMAL**



Machine Id  
**834090**  
 Component  
**Natural Gas Engine**  
 Fluid  
 {not provided} (--- GAL)

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

### Wear

All component wear rates are normal.

### Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0122060</b>	GFL0116540	GFL0116559
Sample Date	Client Info		<b>23 May 2024</b>	14 May 2024	02 Apr 2024
Machine Age	hrs	Client Info	<b>1300</b>	1231	923
Oil Age	hrs	Client Info	<b>69</b>	1231	923
Oil Changed	Client Info		<b>Not Changed</b>	Changed	Not Changed
Sample Status			<b>NORMAL</b>	ABNORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	<b>12</b>	▲ 73	72
Chromium	ppm	ASTM D5185m >4	<b>&lt;1</b>	4	3
Nickel	ppm	ASTM D5185m >2	<b>0</b>	2	3
Titanium	ppm	ASTM D5185m	<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >9	<b>18</b>	67	59
Lead	ppm	ASTM D5185m >30	<b>&lt;1</b>	1	<1
Copper	ppm	ASTM D5185m >35	<b>2</b>	14	16
Tin	ppm	ASTM D5185m >4	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>35</b>	3	8
Barium	ppm	ASTM D5185m	<b>0</b>	2	2
Molybdenum	ppm	ASTM D5185m	<b>48</b>	65	63
Manganese	ppm	ASTM D5185m	<b>2</b>	13	13
Magnesium	ppm	ASTM D5185m	<b>588</b>	831	823
Calcium	ppm	ASTM D5185m	<b>1499</b>	1566	1428
Phosphorus	ppm	ASTM D5185m	<b>772</b>	830	739
Zinc	ppm	ASTM D5185m	<b>909</b>	1042	995
Sulfur	ppm	ASTM D5185m	<b>2787</b>	2873	2862

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >+100	<b>6</b>	21	24
Sodium	ppm	ASTM D5185m	<b>5</b>	7	7
Potassium	ppm	ASTM D5185m >20	<b>42</b>	184	163

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	<b>0</b>	0.1	0.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.5</b>	12.6	12.9
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>19.7</b>	26.6	25.9


## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>16.3</b>	24.0	23.2
Base Number (BN)	mg KOH/g	ASTM D2896	<b>8.3</b>	2.7	2.8




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

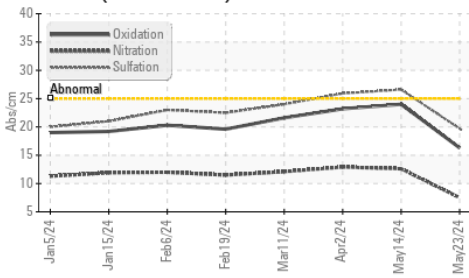


Aluminum (ppm)

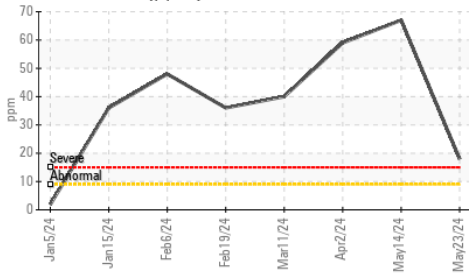

Viscosity @ 100°C

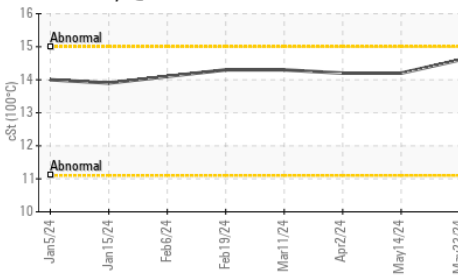

Aluminum (ppm)

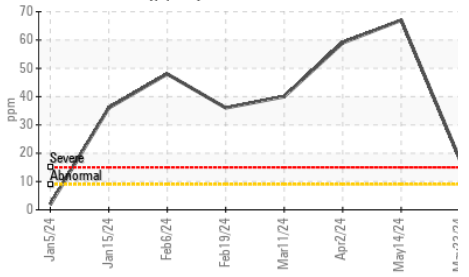


PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.6	14.2	14.2

## GRAPHS


Ferrous Alloys

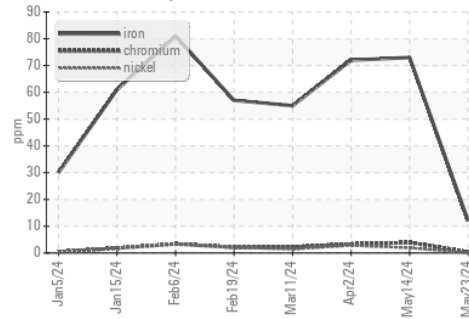


Non-ferrous Metals

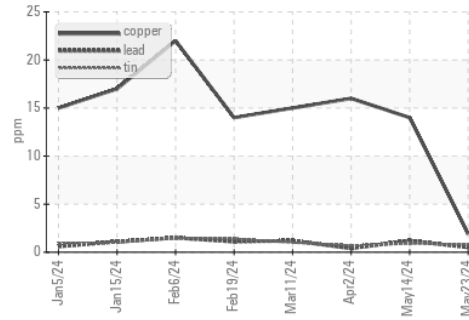

Viscosity @ 100°C

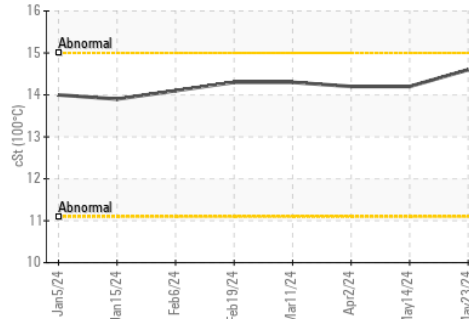

Base Number

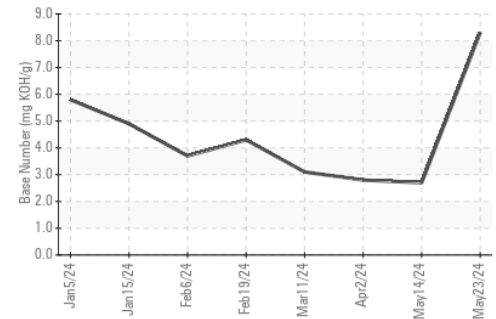

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0122060  
 Lab Number : 06193837  
 Unique Number : 11055960  
 Test Package : FLEET

Received : 29 May 2024  
 Tested : 30 May 2024  
 Diagnosed : 30 May 2024 - Wes Davis

GFL Environmental - 652 - Fredericksburg Hauling  
 10954 Houser Drive  
 Fredericksburg, VA  
 US 22408  
 Contact: WILLIAM MILO  
 wmilo@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)