

# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**



Machine Id

**191**

Component

**Differential**

Fluid

**PETRO CANADA TRAXON SYNTHETIC 75W90 (--- QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0124597</b>	---	---
Sample Date	Client Info			<b>26 Apr 2024</b>	---	---
Machine Age	mls	Client Info		<b>313842</b>	---	---
Oil Age	mls	Client Info		<b>59640</b>	---	---
Oil Changed	Client Info			<b>Changed</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>.2	<b>NEG</b>	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>500	<b>322</b>	---	---
Chromium	ppm	ASTM D5185m	>10	<b>2</b>	---	---
Nickel	ppm	ASTM D5185m	>10	<b>2</b>	---	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>25	<b>3</b>	---	---
Lead	ppm	ASTM D5185m	>25	<b>20</b>	---	---
Copper	ppm	ASTM D5185m	>100	<b>71</b>	---	---
Tin	ppm	ASTM D5185m	>10	<b>2</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	---	---


ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	328	<b>86</b>	---	---
Barium	ppm	ASTM D5185m	1	<b>&lt;1</b>	---	---
Molybdenum	ppm	ASTM D5185m		<b>0</b>	---	---
Manganese	ppm	ASTM D5185m		<b>9</b>	---	---
Magnesium	ppm	ASTM D5185m	1	<b>5</b>	---	---
Calcium	ppm	ASTM D5185m	7	<b>70</b>	---	---
Phosphorus	ppm	ASTM D5185m	1145	<b>848</b>	---	---
Zinc	ppm	ASTM D5185m	3	<b>42</b>	---	---
Sulfur	ppm	ASTM D5185m	17909	<b>23152</b>	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>75	<b>70</b>	---	---
Sodium	ppm	ASTM D5185m		<b>5</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>9</b>	---	---

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>.2	<b>NEG</b>	---	---
Free Water	scalar	*Visual		<b>NEG</b>	---	---



# OIL ANALYSIS REPORT

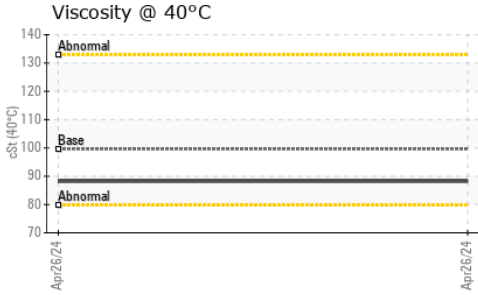




## FLUID PROPERTIES

method	limit/base	current	history1	history2	
Visc @ 40°C	cSt ASTM D445	99.6	<b>88.2</b>	---	---

## SAMPLE IMAGES

method	limit/base	current	history1	history2	
Color			no image	no image	no image
Bottom			no image	no image	no image

## GRAPHS

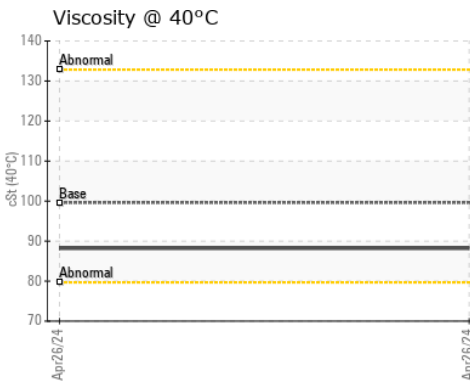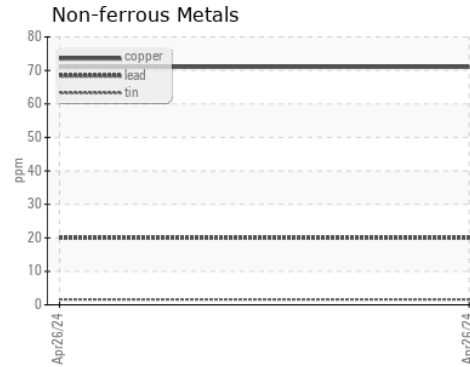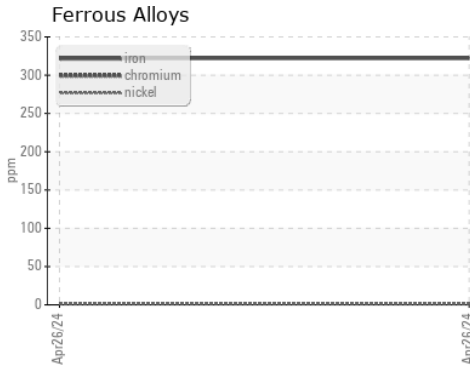

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0124597 **Received** : 29 May 2024  
**Lab Number** : **06194428** **Tested** : 31 May 2024  
**Unique Number** : 11056551 **Diagnosed** : 31 May 2024 - Don Baldrige  
**Test Package** : FLEET

**GAS FIELD SPECIALISTS**  
 114 PA-660  
 MANSFIELD, PA  
 US 16933  
 Contact: TARA MUIRHEAD  
 tara.muirhead@gfsinc.net

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: