

# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**



Area  
**Walgreens - Tractor**  
 Machine #  
**[Walgreens - Tractor] 136A624064**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**

### DIAGNOSIS

#### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor. ( Customer Sample Comment: Top Up Amount: 1 GAL )

#### Wear

All component wear rates are normal.

#### Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0107542</b>	---	---
Sample Date	Client Info		<b>22 May 2024</b>	---	---
Machine Age	mls	Client Info	<b>22002</b>	---	---
Oil Age	mls	Client Info	<b>22002</b>	---	---
Oil Changed	Client Info		<b>Oil Added</b>	---	---
Sample Status			<b>NORMAL</b>	---	---

### CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>2.0	<b>&lt;1.0</b>	---	---
Water	WC Method	>0.2	<b>NEG</b>	---	---
Glycol	WC Method		<b>NEG</b>	---	---

### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>45</b>	---	---
Chromium	ppm	ASTM D5185m >20	<b>2</b>	---	---
Nickel	ppm	ASTM D5185m >4	<b>6</b>	---	---
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m >3	<b>1</b>	---	---
Aluminum	ppm	ASTM D5185m >20	<b>38</b>	---	---
Lead	ppm	ASTM D5185m >40	<b>4</b>	---	---
Copper	ppm	ASTM D5185m >330	<b>29</b>	---	---
Tin	ppm	ASTM D5185m >15	<b>4</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	---	---

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	<b>45</b>	---	---
Barium	ppm	ASTM D5185m 0	<b>5</b>	---	---
Molybdenum	ppm	ASTM D5185m 50	<b>61</b>	---	---
Manganese	ppm	ASTM D5185m 0	<b>5</b>	---	---
Magnesium	ppm	ASTM D5185m 950	<b>427</b>	---	---
Calcium	ppm	ASTM D5185m 1050	<b>1783</b>	---	---
Phosphorus	ppm	ASTM D5185m 995	<b>980</b>	---	---
Zinc	ppm	ASTM D5185m 1180	<b>1204</b>	---	---
Sulfur	ppm	ASTM D5185m 2600	<b>3287</b>	---	---

### CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>39</b>	---	---
Sodium	ppm	ASTM D5185m	<b>6</b>	---	---
Potassium	ppm	ASTM D5185m >20	<b>106</b>	---	---

### INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.3</b>	---	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.1</b>	---	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>21.4</b>	---	---

### FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>17.8</b>	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	<b>7.1</b>	---	---







# OIL ANALYSIS REPORT

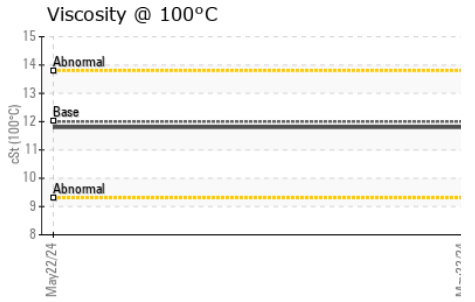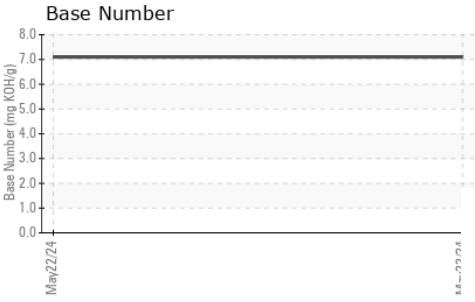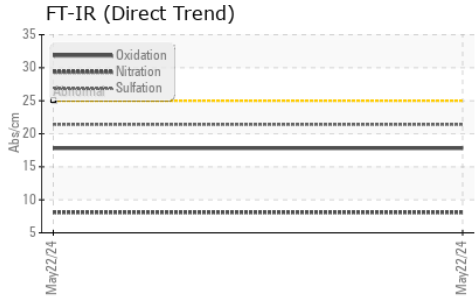

PARAMETER	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

PARAMETER	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	11.8	---	---

## GRAPHS

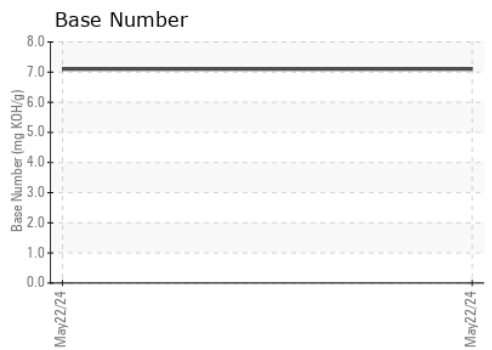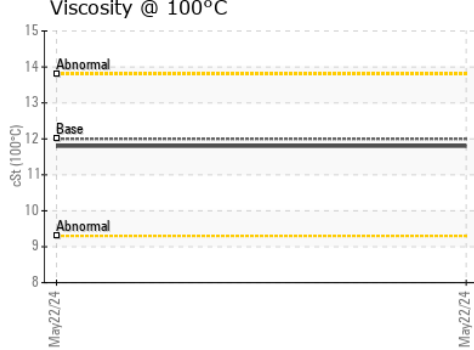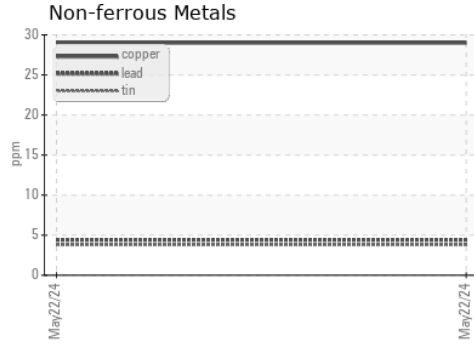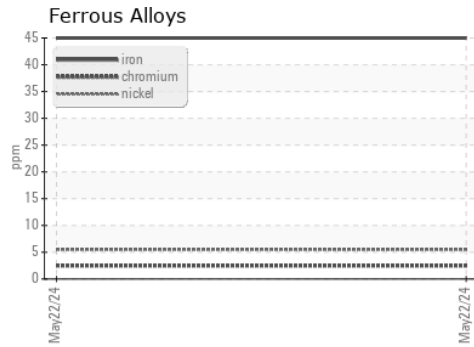

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0107542  
**Lab Number** : 06194754  
**Unique Number** : 11056877  
**Test Package** : FLEET

**Received** : 29 May 2024  
**Tested** : 30 May 2024  
**Diagnosed** : 31 May 2024 - Sean Felton

**Transervice - Shop 1367 - Berkeley-Jupiter**  
 15998 Walgreens Drive  
 Jupiter, FL  
 US 33478

Contact: Manny Gonzalez  
 egonzalez@transervice.com

T: (561)776-0755

F: (561)776-0799

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)