


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

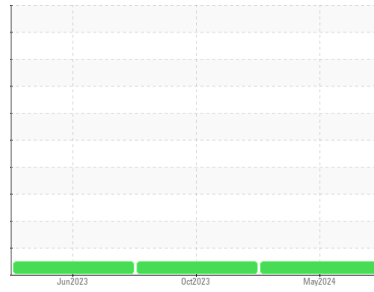

Machine Id
742175
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (--- GAL)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. No other contaminants were detected in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

| SAMPLE INFORMATION | | method | limit/base | current | history1 | history2 |
|--------------------|-------------|-------------|------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | | PCA0125241 | PCA0105316 | PCA0100742 |
| Sample Date | Client Info | | | 10 May 2024 | 06 Oct 2023 | 30 Jun 2023 |
| Machine Age | mls | Client Info | | 222361 | 108168 | 56649 |
| Oil Age | mls | Client Info | | 222361 | 108168 | 56649 |
| Oil Changed | Client Info | | | Changed | Not Changd | Changed |
| Sample Status | | | | NORMAL | NORMAL | NORMAL |

| CONTAMINATION | | method | limit/base | current | history1 | history2 |
|---------------|-----------|--------|------------|----------------|----------|----------|
| Fuel | WC Method | >5 | | <1.0 | <1.0 | <1.0 |
| Water | WC Method | >0.2 | | NEG | NEG | NEG |
| Glycol | WC Method | | | NEG | NEG | NEG |

| WEAR METALS | | method | limit/base | current | history1 | history2 |
|-------------|-----|-------------|------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185m | >100 | 57 | 62 | 88 |
| Chromium | ppm | ASTM D5185m | >20 | 3 | 5 | 7 |
| Nickel | ppm | ASTM D5185m | >4 | <1 | <1 | 1 |
| Titanium | ppm | ASTM D5185m | | 16 | <1 | <1 |
| Silver | ppm | ASTM D5185m | >3 | <1 | 0 | <1 |
| Aluminum | ppm | ASTM D5185m | >20 | 32 | 56 | 68 |
| Lead | ppm | ASTM D5185m | >40 | 0 | 0 | 0 |
| Copper | ppm | ASTM D5185m | >330 | 24 | 57 | 301 |
| Tin | ppm | ASTM D5185m | >15 | 1 | 2 | 8 |
| Vanadium | ppm | ASTM D5185m | | <1 | 0 | 0 |
| Cadmium | ppm | ASTM D5185m | | <1 | 0 | 0 |






| ADDITIVES | | method | limit/base | current | history1 | history2 |
|------------|-----|-------------|------------|-------------|----------|----------|
| Boron | ppm | ASTM D5185m | 2 | 6 | 3 | 19 |
| Barium | ppm | ASTM D5185m | 0 | 1 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | 50 | 57 | 64 | 46 |
| Manganese | ppm | ASTM D5185m | 0 | 1 | <1 | 4 |
| Magnesium | ppm | ASTM D5185m | 950 | 899 | 936 | 577 |
| Calcium | ppm | ASTM D5185m | 1050 | 1340 | 1311 | 1811 |
| Phosphorus | ppm | ASTM D5185m | 995 | 1188 | 975 | 784 |
| Zinc | ppm | ASTM D5185m | 1180 | 1336 | 1264 | 990 |
| Sulfur | ppm | ASTM D5185m | 2600 | 2816 | 2554 | 2217 |

| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
|--------------|-----|-------------|------------|--------------|----------|----------|
| Silicon | ppm | ASTM D5185m | >25 | 8 | 8 | 9 |
| Sodium | ppm | ASTM D5185m | | <1 | 2 | 6 |
| Potassium | ppm | ASTM D5185m | >20 | 79 | 138 | 159 |

| INFRA-RED | | method | limit/base | current | history1 | history2 |
|-----------|----------|-------------|------------|-------------|----------|----------|
| Soot % | % | *ASTM D7844 | >3 | 0.9 | 1 | 0.9 |
| Nitration | Abs/cm | *ASTM D7624 | >20 | 11.2 | 12.2 | 14.7 |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30 | 27.0 | 24.2 | 26.3 |

| FLUID DEGRADATION | | method | limit/base | current | history1 | history2 |
|-------------------|----------|-------------|------------|-------------|----------|----------|
| Oxidation | Abs/.1mm | *ASTM D7414 | >25 | 25.6 | 23.4 | 30.5 |
| Base Number (BN) | mg KOH/g | ASTM D2896 | | 6.7 | 5.2 | 5.9 |









OIL ANALYSIS REPORT

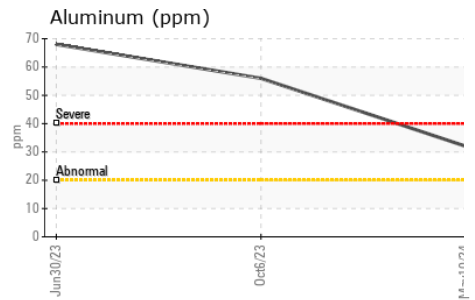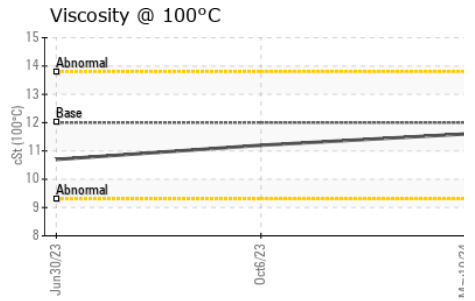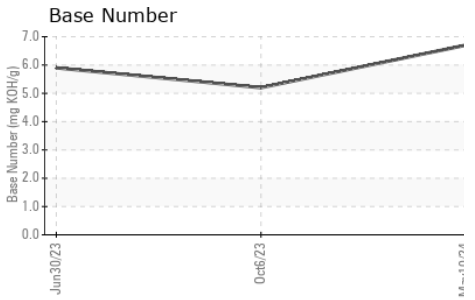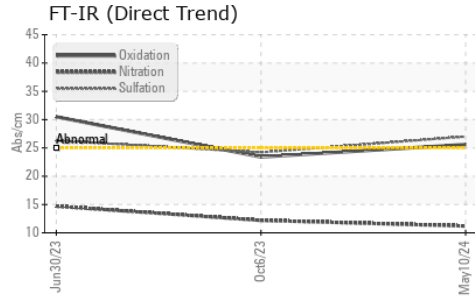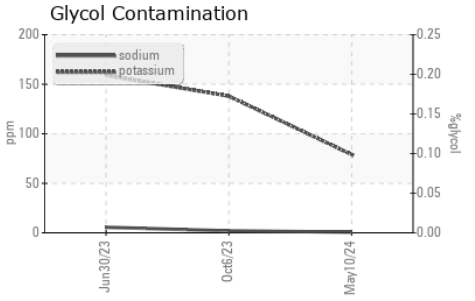

| PARAMETER | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG |

| PARAMETER | method | limit/base | current | history1 | history2 |
|--------------|--------|------------|---------|----------|----------|
| Visc @ 100°C | cSt | ASTM D445 | 12.00 | 11.6 | 11.2 |

GRAPHS

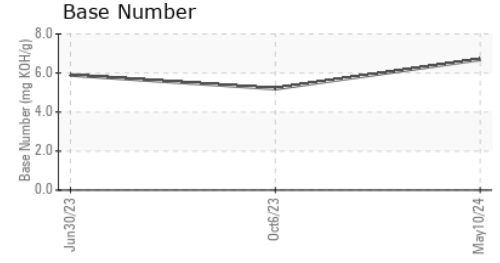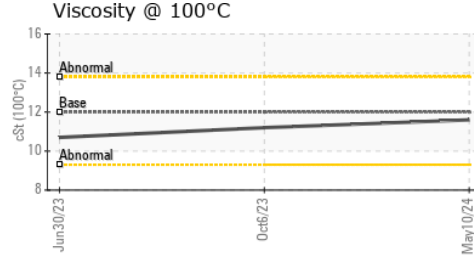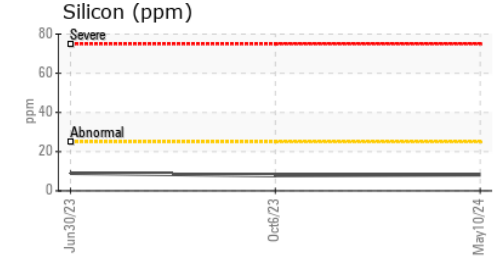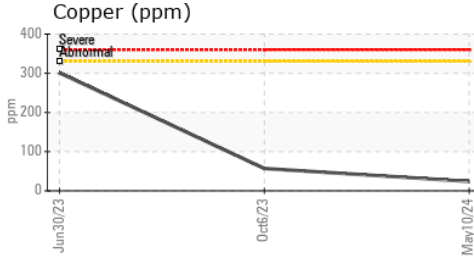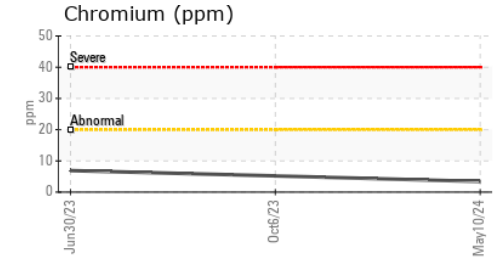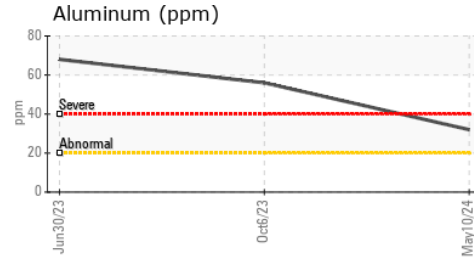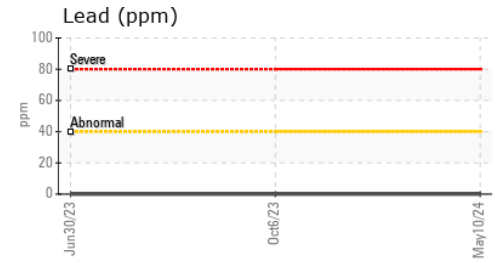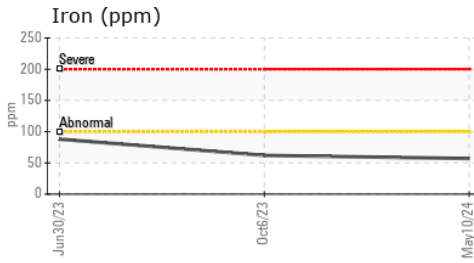

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0125241 **Received** : 30 May 2024
Lab Number : 06194971 **Tested** : 31 May 2024
Unique Number : 11057094 **Diagnosed** : 31 May 2024 - Don Baldrige
Test Package : MOB 1 (Additional Tests: TBN)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

MILLER TRUCK LEASING #118
 2196 BENNETT ROAD
 PHILADELPHIA, PA
 US 19116
 Contact: ROSTY VITER
 rviter@millertransgroup.com
 T: (215)552-9832
 F: (215)552-9892