


OIL ANALYSIS REPORT

Machine Id
706375
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (--- QTS)

Sample Rating Trend

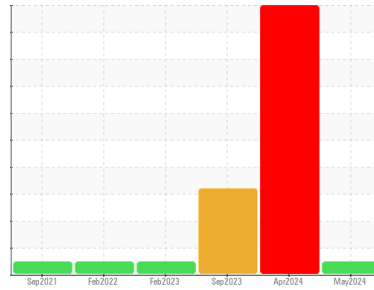

NORMAL



DIAGNOSIS

Recommendation
 Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Wear
 All component wear rates are normal.

Contamination
 There is no indication of any contamination in the oil.

Fluid Condition
 The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0125204	PCA0121422	PCA0105276
Sample Date	Client Info		07 May 2024	26 Apr 2024	22 Sep 2023
Machine Age	mls	Client Info	0	335033	275051
Oil Age	mls	Client Info	0	335033	275051
Oil Changed	Client Info		Changed	N/A	Changed
Sample Status			NORMAL	SEVERE	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	57	▲ 341	▲ 164
Chromium	ppm	ASTM D5185m >20	4	▲ 20	8
Nickel	ppm	ASTM D5185m >4	<1	0	<1
Titanium	ppm	ASTM D5185m	3	3	<1
Silver	ppm	ASTM D5185m >3	0	0	0
Aluminum	ppm	ASTM D5185m >20	8	● 48	● 20
Lead	ppm	ASTM D5185m >40	0	0	<1
Copper	ppm	ASTM D5185m >330	6	34	20
Tin	ppm	ASTM D5185m >15	<1	3	<1
Vanadium	ppm	ASTM D5185m	<1	0	<1
Cadmium	ppm	ASTM D5185m	<1	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	13	3	<1
Barium	ppm	ASTM D5185m 0	1	0	0
Molybdenum	ppm	ASTM D5185m 50	53	64	65
Manganese	ppm	ASTM D5185m 0	<1	5	3
Magnesium	ppm	ASTM D5185m 950	809	856	1062
Calcium	ppm	ASTM D5185m 1050	1056	1365	1438
Phosphorus	ppm	ASTM D5185m 995	1017	1034	1141
Zinc	ppm	ASTM D5185m 1180	1107	1272	1458
Sulfur	ppm	ASTM D5185m 2600	2917	2863	2581

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	18	▲ 79	▲ 36
Sodium	ppm	ASTM D5185m	5	30	8
Potassium	ppm	ASTM D5185m >20	4	14	19




INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.4	1.3	1.3
Nitration	Abs/cm	*ASTM D7624 >20	6.8	11.6	13.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	19.2	24.9	27.4

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	15.2	21.0	25.9
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	5.4	4.0









OIL ANALYSIS REPORT

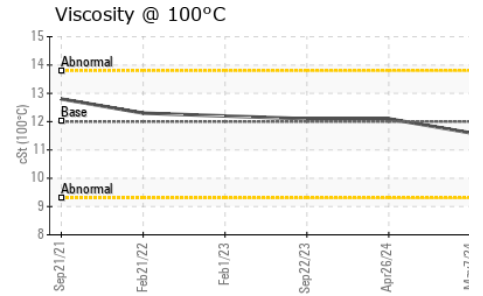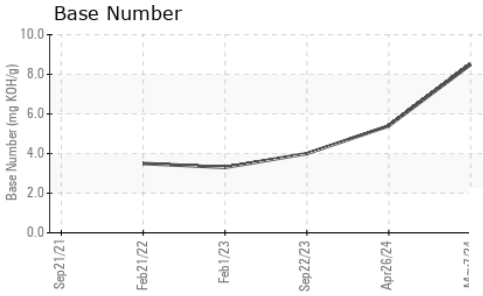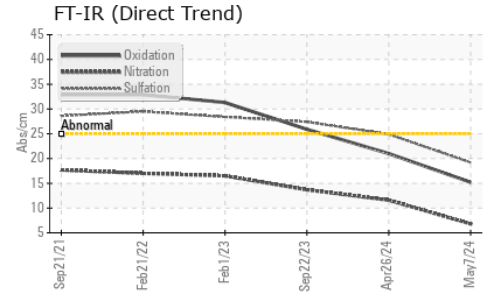

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	LIGHT	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	11.6	12.1	12.1

GRAPHS

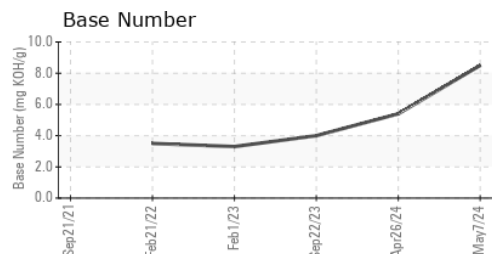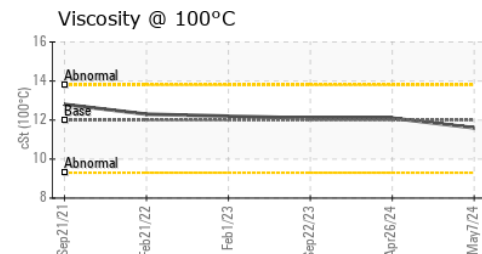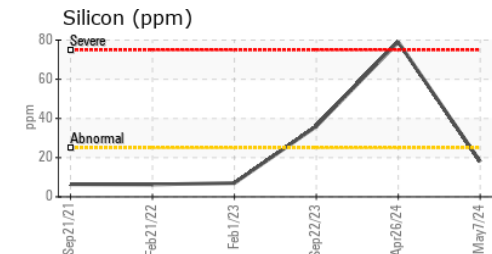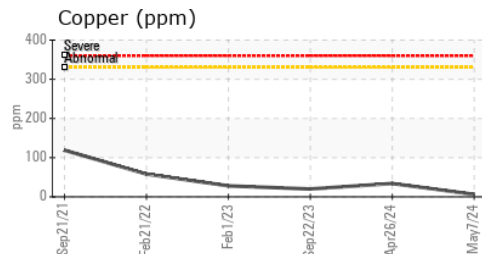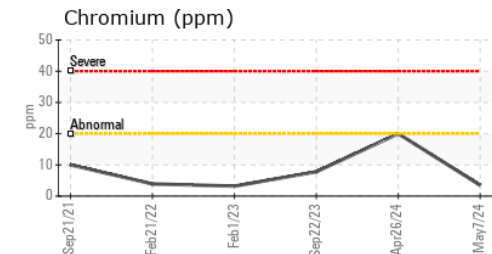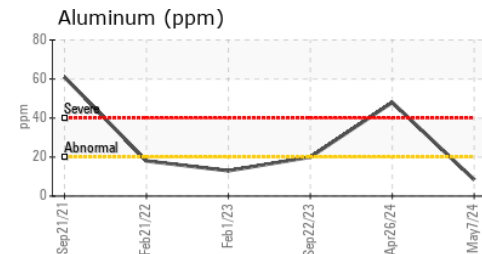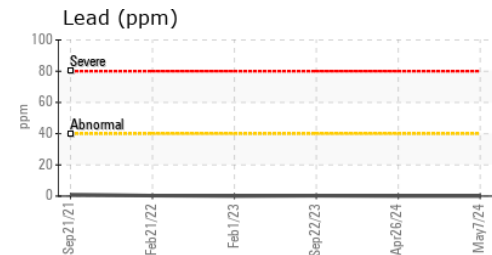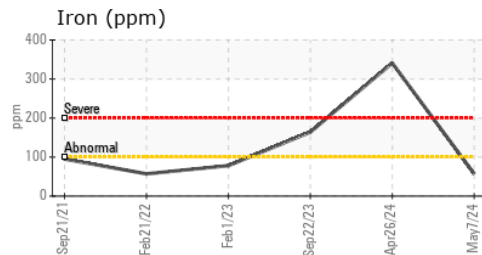

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0125204 **Received** : 30 May 2024
Lab Number : **06194990** **Tested** : 31 May 2024
Unique Number : 11057113 **Diagnosed** : 31 May 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: TBN)

MILLER TRUCK LEASING #118
 2196 BENNETT ROAD
 PHILADELPHIA, PA
 US 19116
 Contact: ROSTY VITER
 rviter@millertransgroup.com
 T: (215)552-9832
 F: (215)552-9892

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)