




# OIL ANALYSIS REPORT



Machine Id  
**834054**  
 Component  
**Natural Gas Engine**  
 Fluid  
**PETRO CANADA DURON GEO LD 15W40 (--- GAL)**

### Sample Rating Trend

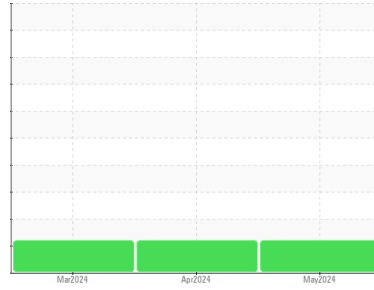

COOL CHEMICALS



### DIAGNOSIS

#### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

Sodium and/or potassium levels remain high. Test for glycol is negative.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	<b>GFL0122834</b>	GFL0118805	GFL0114118	
Sample Date	Client Info	<b>24 May 2024</b>	18 Apr 2024	21 Mar 2024	
Machine Age	hrs	Client Info	<b>428</b>	286	123
Oil Age	hrs	Client Info	<b>428</b>	286	0
Oil Changed	Client Info	<b>Not Changed</b>	Not Changed	Not Changed	
Sample Status		<b>ATTENTION</b>	ABNORMAL	ABNORMAL	

### CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.1	<b>NEG</b>	NEG	NEG

### WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >50	<b>22</b>	28	18
Chromium	ppm ASTM D5185m >5	<b>0</b>	<1	<1
Nickel	ppm ASTM D5185m >4	<b>0</b>	1	1
Titanium	ppm ASTM D5185m >5	<b>0</b>	<1	<1
Silver	ppm ASTM D5185m >3	<b>0</b>	<1	<1
Aluminum	ppm ASTM D5185m >25	<b>6</b>	7	5
Lead	ppm ASTM D5185m >40	<b>0</b>	<1	1
Copper	ppm ASTM D5185m >150	<b>4</b>	7	5
Tin	ppm ASTM D5185m >4	<b>&lt;1</b>	2	1
Vanadium	ppm ASTM D5185m	<b>0</b>	<1	<1
Cadmium	ppm ASTM D5185m	<b>0</b>	<1	<1

### ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 50	<b>16</b>	32	55
Barium	ppm ASTM D5185m 5	<b>0</b>	<1	1
Molybdenum	ppm ASTM D5185m 50	<b>100</b>	153	135
Manganese	ppm ASTM D5185m 0	<b>2</b>	3	2
Magnesium	ppm ASTM D5185m 560	<b>625</b>	856	774
Calcium	ppm ASTM D5185m 1510	<b>1177</b>	1685	1531
Phosphorus	ppm ASTM D5185m 780	<b>605</b>	955	847
Zinc	ppm ASTM D5185m 870	<b>710</b>	1062	976
Sulfur	ppm ASTM D5185m 2040	<b>2891</b>	4429	3642

### CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>24</b>	34	26
Sodium	ppm ASTM D5185m	<b>5</b>	7	5
Potassium	ppm ASTM D5185m >20	<b>89</b>	▲ 126	▲ 118

### INFRA-RED





method	limit/base	current	history1	history2
Soot %	% *ASTM D7844	<b>0.1</b>	0	0
Nitration	Abs/cm *ASTM D7624 >20	<b>8.5</b>	6.2	5.3
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>22.2</b>	21.1	20.6

### FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>16.9</b>	14.7	14.4
Base Number (BN)	mg KOH/g ASTM D2896 10.2	<b>5.7</b>	6.6	7.6







# OIL ANALYSIS REPORT

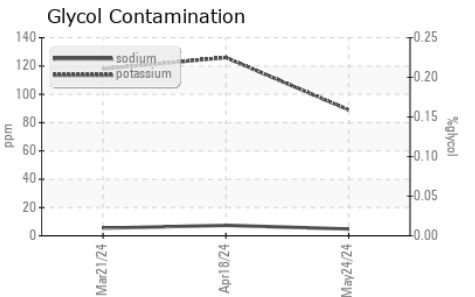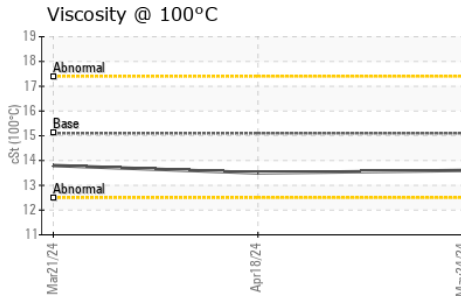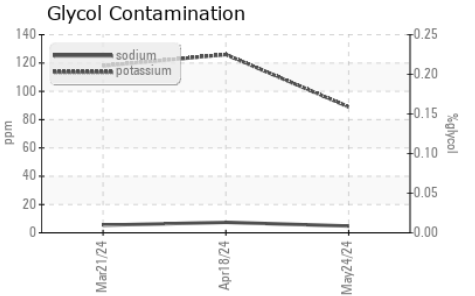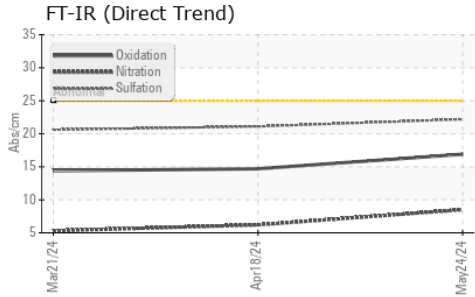

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.1	13.6	13.5	13.8

## GRAPHS

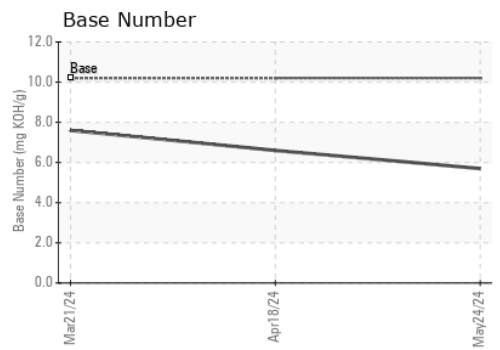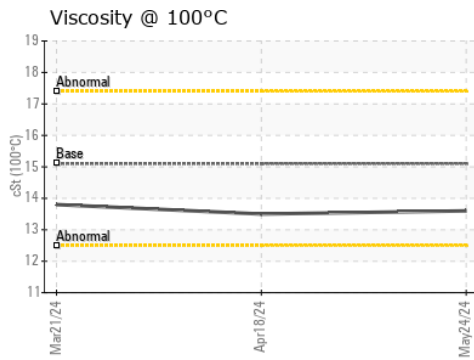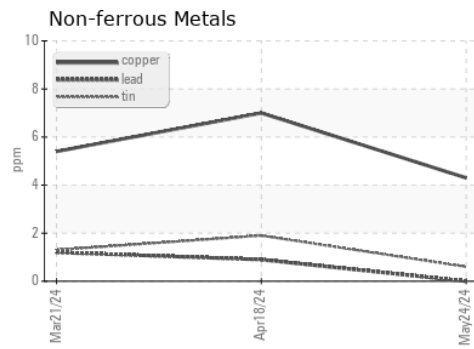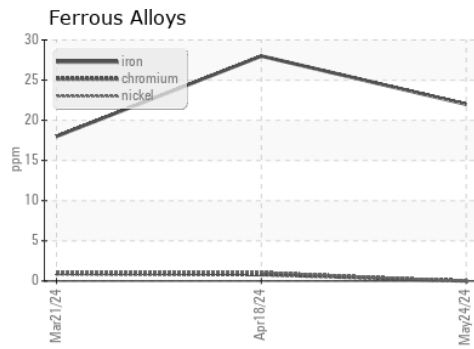

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0122834      **Received** : 30 May 2024  
**Lab Number** : 06195184      **Tested** : 03 Jun 2024  
**Unique Number** : 11057307      **Diagnosed** : 03 Jun 2024 - Jonathan Hester  
**Test Package** : FLEET ( Additional Tests: Glycol )

**GFL Environmental - 837 - Harrison TS**  
 22820 S State Route 291  
 Harrisonville, MO  
 US 64701  
 Contact: SARA PATRICK  
 spatrack@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)