


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

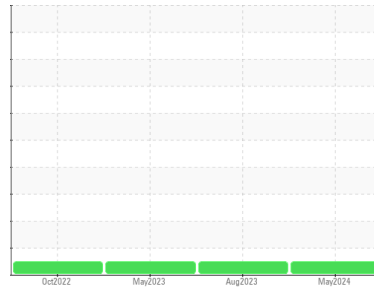

Machine Id  
**738202**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0125226</b>	PCA0100792	PCA0095795
Sample Date	Client Info			<b>16 May 2024</b>	23 Aug 2023	18 May 2023
Machine Age	mls	Client Info		<b>243870</b>	145545	34159
Oil Age	mls	Client Info		<b>243870</b>	75885	34159
Oil Changed	Client Info			<b>Changed</b>	Changed	Not Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>18</b>	58	31
Chromium	ppm	ASTM D5185m	>20	<b>3</b>	3	2
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	3	3
Silver	ppm	ASTM D5185m	>3	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>5</b>	30	19
Lead	ppm	ASTM D5185m	>40	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>330	<b>52</b>	81	82
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	3	2
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	<b>37</b>	5	7
Barium	ppm	ASTM D5185m	0	<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185m	50	<b>53</b>	59	61
Manganese	ppm	ASTM D5185m	0	<b>2</b>	1	<1
Magnesium	ppm	ASTM D5185m	950	<b>564</b>	915	784
Calcium	ppm	ASTM D5185m	1050	<b>1607</b>	1378	1357
Phosphorus	ppm	ASTM D5185m	995	<b>788</b>	959	948
Zinc	ppm	ASTM D5185m	1180	<b>910</b>	1252	1150
Sulfur	ppm	ASTM D5185m	2600	<b>2745</b>	2506	2386


CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>8</b>	7	5
Sodium	ppm	ASTM D5185m		<b>7</b>	3	0
Potassium	ppm	ASTM D5185m	>20	<b>54</b>	63	51
Glycol	%	*ASTM D2982		<b>NEG</b>	NEG	NEG

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.3</b>	1.3	0.7
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.4</b>	12.6	9.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>21.4</b>	24.3	21.8


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>18.3</b>	23.8	18.7
Base Number (BN)	mg KOH/g	ASTM D2896		<b>8.9</b>	5.4	7.5

# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

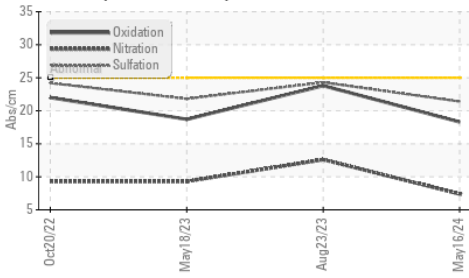


Glycol Contamination

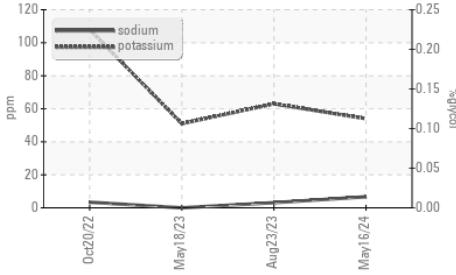


Viscosity @ 100°C

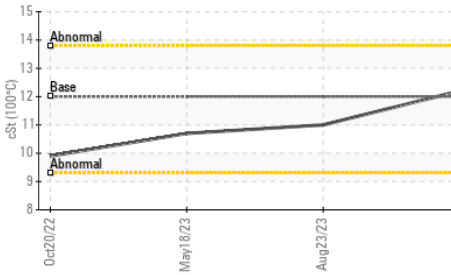

Glycol Contamination

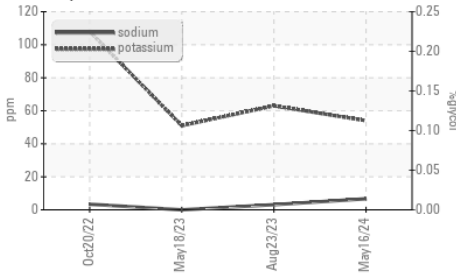

Viscosity @ 100°C

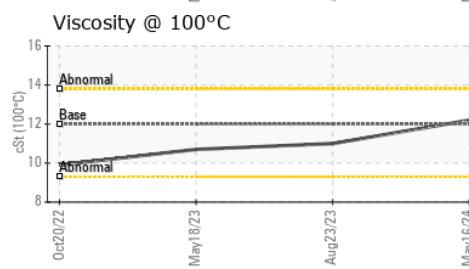

## VISUAL


	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

## FLUID PROPERTIES


	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	12.2	11.0

## GRAPHS


Iron (ppm)

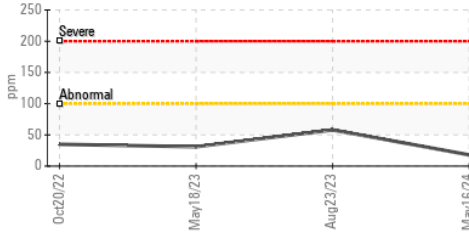


Lead (ppm)

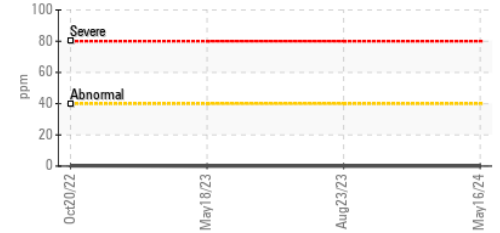


Aluminum (ppm)

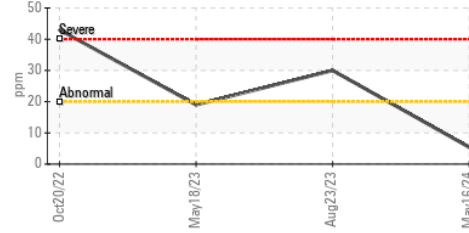


Chromium (ppm)

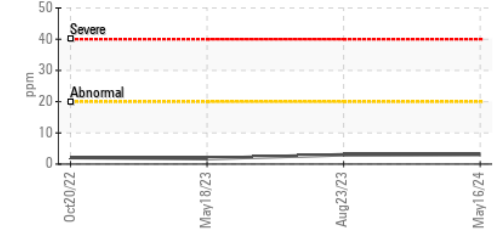


Copper (ppm)

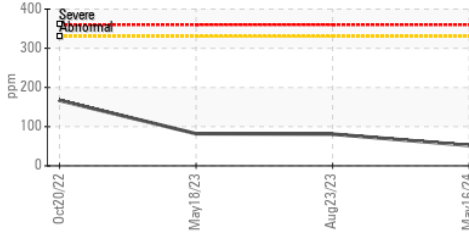


Silicon (ppm)

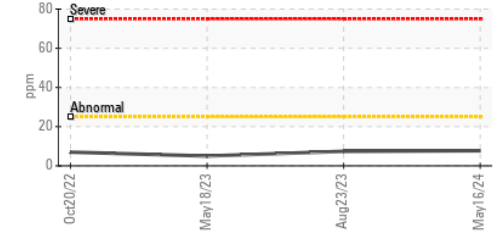

Viscosity @ 100°C

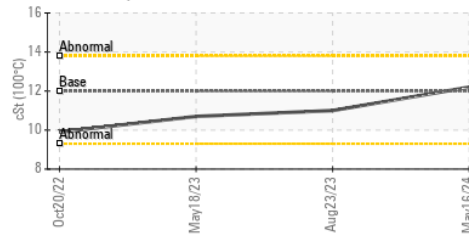

Base Number

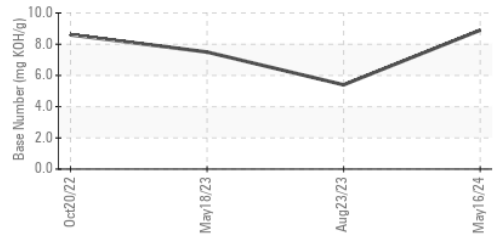

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0125226 **Received** : 30 May 2024  
**Lab Number** : 06195263 **Tested** : 03 Jun 2024  
**Unique Number** : 11057386 **Diagnosed** : 03 Jun 2024 - Jonathan Hester  
**Test Package** : MOB 1 ( Additional Tests: Glycol, TBN )

**MILLER TRUCK LEASING #118**  
 2196 BENNETT ROAD  
 PHILADELPHIA, PA  
 US 19116

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact: ROSTY VITER  
 rviter@millertransgroup.com  
 T: (215)552-9832  
 F: (215)552-9892