




# OIL ANALYSIS REPORT

Sample Rating Trend

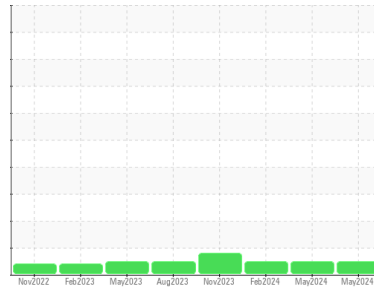

**NORMAL**



Machine Id

**813015**

Component

**Diesel Engine**

Fluid

**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	<b>GFL0121142</b>	GFL0121135	GFL0103117	
Sample Date	Client Info	<b>28 May 2024</b>	10 May 2024	09 Feb 2024	
Machine Age	hrs	Client Info	<b>3229</b>	3151	2646
Oil Age	hrs	Client Info	<b>600</b>	505	600
Oil Changed	Client Info	<b>Changed</b>	N/A	Changed	
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL	

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >120	<b>18</b>	17	15
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm ASTM D5185m >5	<b>3</b>	3	8
Titanium	ppm ASTM D5185m >2	<b>0</b>	0	<1
Silver	ppm ASTM D5185m >2	<b>&lt;1</b>	0	<1
Aluminum	ppm ASTM D5185m >20	<b>2</b>	<1	2
Lead	ppm ASTM D5185m >40	<b>0</b>	<1	1
Copper	ppm ASTM D5185m >330	<b>1</b>	<1	4
Tin	ppm ASTM D5185m >15	<b>1</b>	<1	2
Vanadium	ppm ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	<1	<1

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>9</b>	8	<1
Barium	ppm ASTM D5185m 0	<b>0</b>	0	13
Molybdenum	ppm ASTM D5185m 60	<b>64</b>	65	58
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm ASTM D5185m 1010	<b>994</b>	1056	892
Calcium	ppm ASTM D5185m 1070	<b>1117</b>	1200	1017
Phosphorus	ppm ASTM D5185m 1150	<b>1097</b>	1117	991
Zinc	ppm ASTM D5185m 1270	<b>1307</b>	1367	1136
Sulfur	ppm ASTM D5185m 2060	<b>3364</b>	3614	3221

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>4</b>	7	5
Sodium	ppm ASTM D5185m	<b>4</b>	3	<1
Potassium	ppm ASTM D5185m >20	<b>2</b>	<1	2

## INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >4	<b>0.7</b>	0.8	0.7
Nitration	Abs/cm *ASTM D7624 >20	<b>10.1</b>	9.2	8.8
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>22.2</b>	21.1	20.1


## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>18.1</b>	16.7	16.0
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>6.7</b>	7.7	7.5




# OIL ANALYSIS REPORT


### FT-IR (Direct Trend)

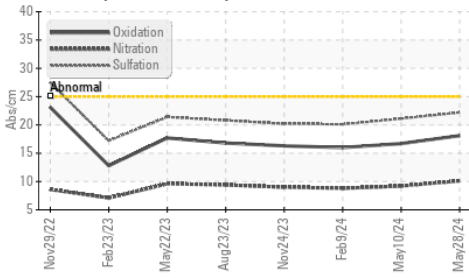

### Base Number

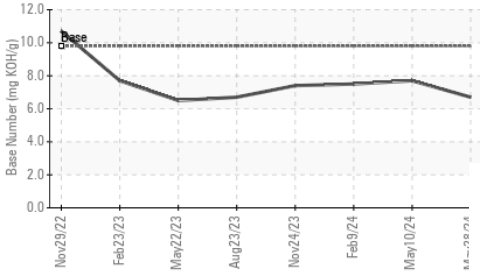

### Viscosity @ 100°C

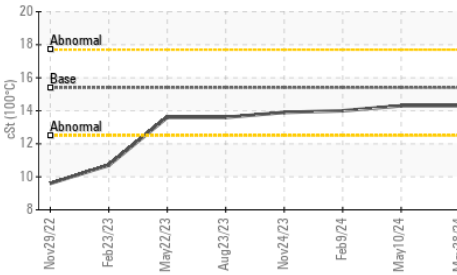


PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	14.3	14.0

### GRAPHS


#### Ferrous Alloys

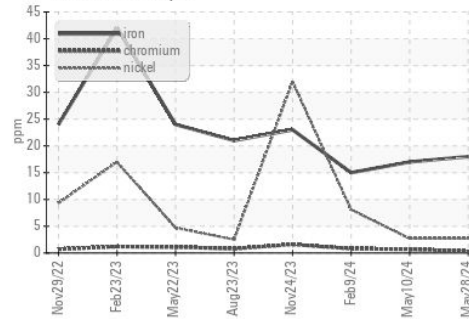


#### Non-ferrous Metals

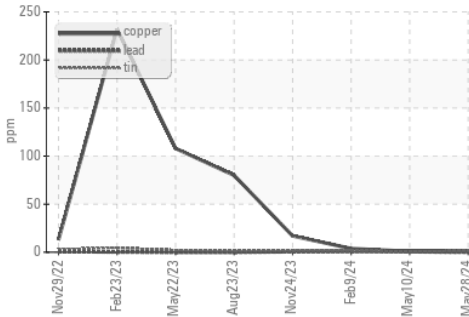

#### Viscosity @ 100°C

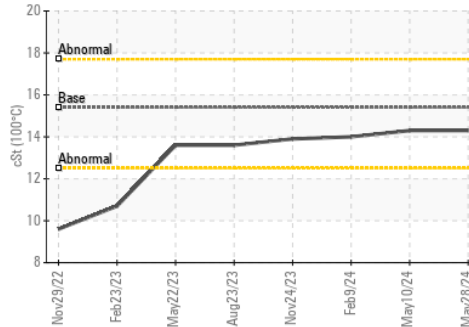

#### Base Number

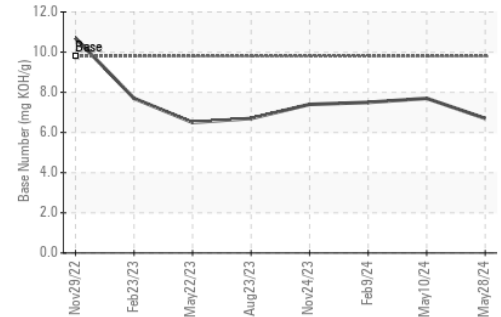

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0121142  
**Lab Number** : 06195276  
**Unique Number** : 11057399  
**Test Package** : FLEET

**Received** : 30 May 2024  
**Tested** : 31 May 2024  
**Diagnosed** : 31 May 2024 - Wes Davis

**GFL Environmental - 683 - Ruckersville Hauling**  
 261 INDUSTRIAL DR  
 Ruckersville, VA  
 US 22698  
 Contact: Jaf Finney  
 jfinney@gflenv.com  
 T: (434)990-4972  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)