


OIL ANALYSIS REPORT

Sample Rating Trend



ISO

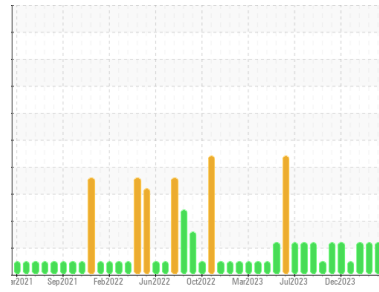

Area

MIX ROOM E [98996502]

Machine Id

KR-GR-003115 - WEST DUMPER (S/N MIX E - 11513079)

Component

Hydraulic System

Fluid

AW HYDRAULIC OIL ISO 68 (--- GAL)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| SAMPLE INFORMATION | | method | limit/base | current | history1 | history2 |
|--------------------|-------------|-------------|------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | | PCA0124747 | PCA01114143 | PCA0116068 |
| Sample Date | Client Info | | | 24 May 2024 | 20 Mar 2024 | 11 Mar 2024 |
| Machine Age | hrs | Client Info | | 0 | 0 | 0 |
| Oil Age | hrs | Client Info | | 0 | 0 | 0 |
| Oil Changed | Client Info | | | N/A | N/A | N/A |
| Sample Status | | | | ABNORMAL | ABNORMAL | ABNORMAL |

| CONTAMINATION | | method | limit/base | current | history1 | history2 |
|---------------|-----------|--------|------------|------------|----------|----------|
| Water | WC Method | | >0.05 | NEG | NEG | NEG |

| WEAR METALS | | method | limit/base | current | history1 | history2 |
|-------------|-----|-------------|------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185m | >20 | <1 | 0 | 0 |
| Chromium | ppm | ASTM D5185m | >20 | <1 | <1 | <1 |
| Nickel | ppm | ASTM D5185m | >20 | 0 | 0 | 0 |
| Titanium | ppm | ASTM D5185m | | <1 | <1 | <1 |
| Silver | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | >20 | 2 | 3 | 3 |
| Lead | ppm | ASTM D5185m | >20 | <1 | 0 | <1 |
| Copper | ppm | ASTM D5185m | >20 | <1 | <1 | <1 |
| Tin | ppm | ASTM D5185m | >20 | <1 | <1 | <1 |
| Vanadium | ppm | ASTM D5185m | | 0 | <1 | <1 |
| Cadmium | ppm | ASTM D5185m | | 0 | <1 | <1 |

| ADDITIVES | | method | limit/base | current | history1 | history2 |
|------------|-----|-------------|------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185m | 5 | 0 | 0 | 0 |
| Barium | ppm | ASTM D5185m | 5 | <1 | <1 | 0 |
| Molybdenum | ppm | ASTM D5185m | 5 | <1 | 0 | 0 |
| Manganese | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Magnesium | ppm | ASTM D5185m | 25 | <1 | <1 | <1 |
| Calcium | ppm | ASTM D5185m | 200 | 0 | 3 | 3 |
| Phosphorus | ppm | ASTM D5185m | 300 | 420 | 443 | 439 |
| Zinc | ppm | ASTM D5185m | 370 | 0 | <1 | 0 |
| Sulfur | ppm | ASTM D5185m | 2500 | 442 | 487 | 477 |


| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
|--------------|-----|-------------|------------|----------|----------|----------|
| Silicon | ppm | ASTM D5185m | >15 | 2 | 2 | 2 |
| Sodium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Potassium | ppm | ASTM D5185m | >20 | 2 | 1 | 1 |

| FLUID CLEANLINESS | | method | limit/base | current | history1 | history2 |
|-------------------|--------------|-----------|-------------------|------------|------------|----------|
| Particles >4µm | ASTM D7647 | >10000 | ▲ 108950 | ▲ 114996 | ▲ 34778 | |
| Particles >6µm | ASTM D7647 | >2500 | ▲ 19659 | ▲ 27495 | ▲ 5545 | |
| Particles >14µm | ASTM D7647 | >640 | 226 | 278 | 113 | |
| Particles >21µm | ASTM D7647 | >160 | 31 | 22 | 18 | |
| Particles >38µm | ASTM D7647 | >40 | 1 | 0 | 0 | |
| Particles >71µm | ASTM D7647 | >10 | 0 | 0 | 0 | |
| Oil Cleanliness | ISO 4406 (c) | >20/18/16 | ▲ 24/21/15 | ▲ 24/22/15 | ▲ 22/20/14 | |


| FLUID DEGRADATION | | method | limit/base | current | history1 | history2 |
|-------------------|----------|------------|------------|-------------|----------|----------|
| Acid Number (AN) | mg KOH/g | ASTM D8045 | 0.57 | 0.17 | 0.15 | 0.16 |

OIL ANALYSIS REPORT


▲ Particle Trend

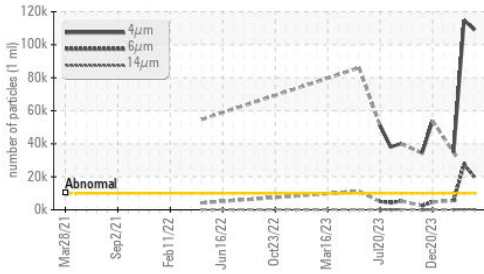


▲ Particle Trend

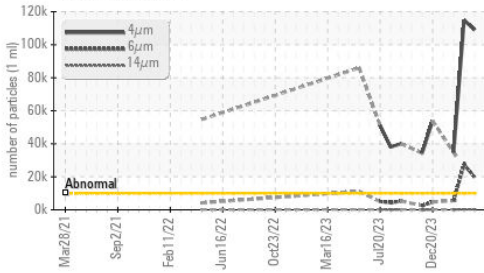

Acid Number

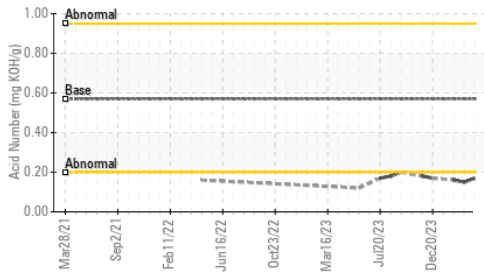

Viscosity @ 40°C

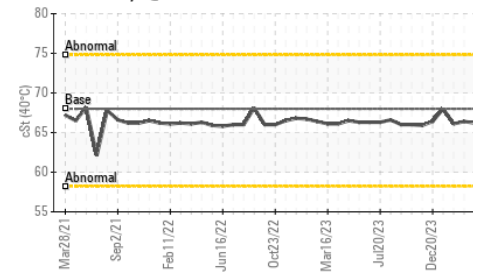

| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.05 | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG |


| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|--------------|---------|----------|----------|
| Visc @ 40°C | cSt | ASTM D445 68 | 66.2 | 66.4 | 66.1 |

SAMPLE IMAGES


| method | limit/base | current | history1 | history2 |
|--------|------------|---------|----------|----------|
| Color | | | | |
| Bottom | | | | |

GRAPHS


Ferrous Alloys

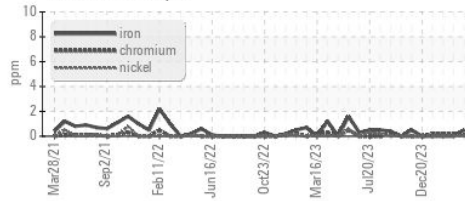


Non-ferrous Metals

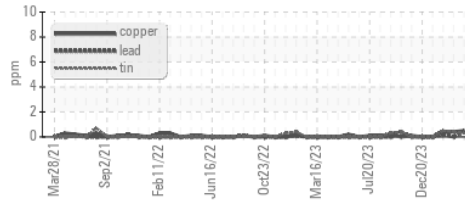


Viscosity @ 40°C

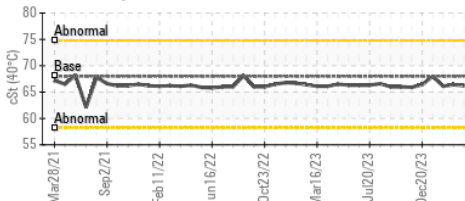

▲ Particle Count

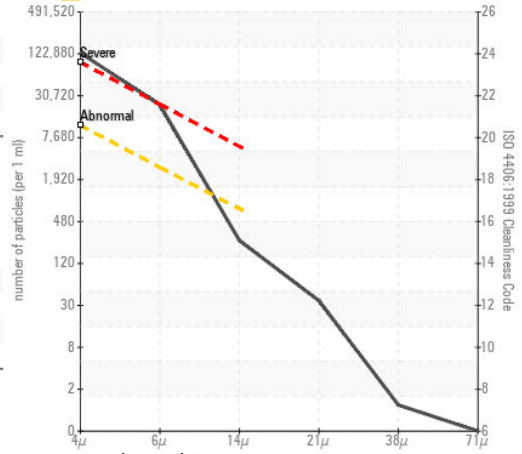

Acid Number

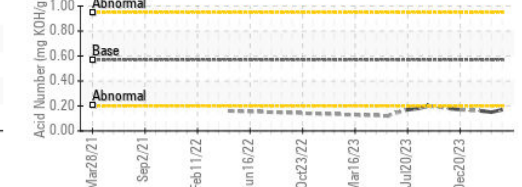

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0124747 **Received** : 30 May 2024
Lab Number : 06195374 **Tested** : 31 May 2024
Unique Number : 11057497 **Diagnosed** : 31 May 2024 - Angela Borella
Test Package : IND 2

KraftHeinz - Kirksville - Plant 8333 PCA
 2504 INDUSTRIAL DR
 KIRKSVILLE, MO
 US 63501
 Contact: WALLACE WARD
 wallace.ward@kraftheinzcompany.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (660)627-1031

F: (660)627-5887