


# OIL ANALYSIS REPORT

Area  
**GRIND ROOM [989996312]**  
 Machine Id  
**KR-GR-003073 - DUMPER 7A - SOUTH (S/N GRIND A - 11513014)**  
 Component  
**Hydraulic System**  
 Fluid  
**AW HYDRAULIC OIL ISO 68 (10 GAL)**

Sample Rating Trend

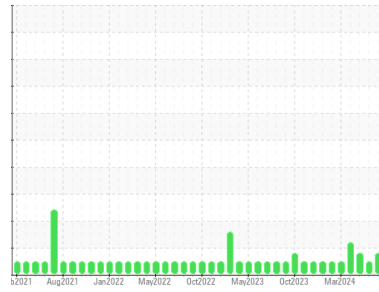

## DIAGNOSIS

**Recommendation**  
 No corrective action is recommended at this time. Resample at the next service interval to monitor.

**Wear**  
 The iron level is abnormal. All other component wear rates are normal.

**Contamination**  
 The amount and size of particulates present in the system are acceptable.

**Fluid Condition**  
 The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0122289</b>	PCA0055974	PCA0119596
Sample Date	Client Info			<b>24 May 2024</b>	17 Apr 2024	20 Mar 2024
Machine Age	hrs	Client Info		<b>0</b>	0	0
Oil Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed	Client Info			<b>N/A</b>	Not Changd	N/A
Sample Status				<b>ABNORMAL</b>	NORMAL	ATTENTION

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.05	<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	<b>▲ 26</b>	0	0
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	<1
Nickel	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>8</b>	0	3
Lead	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	<1
Copper	ppm	ASTM D5185m	>20	<b>1</b>	<1	<1
Tin	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1






ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	5	<b>0</b>	0	0
Barium	ppm	ASTM D5185m	5	<b>1</b>	0	<1
Molybdenum	ppm	ASTM D5185m	5	<b>&lt;1</b>	0	0
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Magnesium	ppm	ASTM D5185m	25	<b>4</b>	<1	<1
Calcium	ppm	ASTM D5185m	200	<b>58</b>	<1	3
Phosphorus	ppm	ASTM D5185m	300	<b>124</b>	311	433
Zinc	ppm	ASTM D5185m	370	<b>104</b>	<1	0
Sulfur	ppm	ASTM D5185m	2500	<b>242</b>	493	470

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<b>5</b>	1	2
Sodium	ppm	ASTM D5185m		<b>28</b>	0	0
Potassium	ppm	ASTM D5185m	>20	<b>8</b>	0	1

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	<b>4443</b>	3489	● 12551
Particles >6µm		ASTM D7647	>2500	<b>205</b>	336	1375
Particles >14µm		ASTM D7647	>640	<b>12</b>	23	29
Particles >21µm		ASTM D7647	>160	<b>4</b>	4	11
Particles >38µm		ASTM D7647	>40	<b>0</b>	0	0
Particles >71µm		ASTM D7647	>10	<b>0</b>	0	0
Oil Cleanliness		ISO 4406 (c)	>20/18/16	<b>19/15/11</b>	19/16/12	● 21/18/12

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.57	<b>0.29</b>	0.29	0.20

# OIL ANALYSIS REPORT

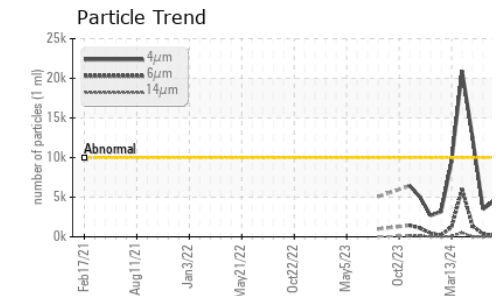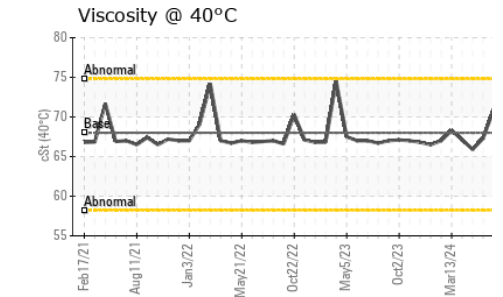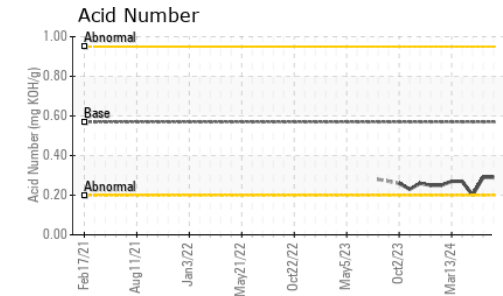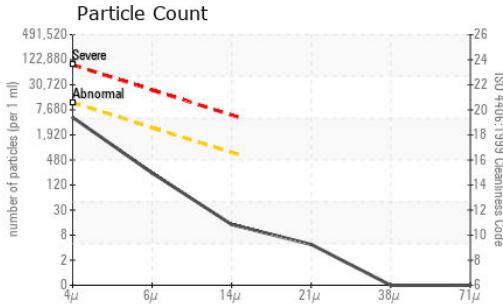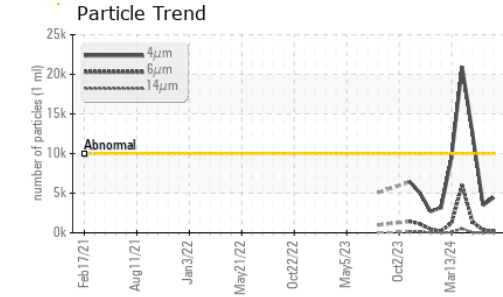

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0122289  
**Lab Number** : 06195398  
**Unique Number** : 11057521  
**Test Package** : IND 2

**Received** : 30 May 2024  
**Tested** : 31 May 2024  
**Diagnosed** : 31 May 2024 - Angela Borella

**KraftHeinz - Kirksville - Plant 8333 PCA**  
 2504 INDUSTRIAL DR  
 KIRKSVILLE, MO  
 US 63501  
 Contact: Wilberto Pacheco Garcia  
 Wilberto.PachecoGarcia@kraftheinz.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) F: (660)627-5887

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 68	70.9	67.3	65.9

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

### GRAPHS