


OIL ANALYSIS REPORT

Sample Rating Trend

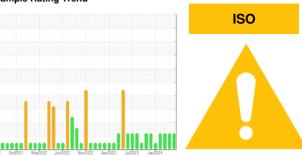

Area

MIX ROOM E [98923532] KR-GR-003115 - WEST DUMPER (S/N MIX E - 11513079)

Hydraulic System

AW HYDRAULIC OIL ISO 68 (--- GAL)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.


Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


		ir2021 Oct20	21 Mar2022 Jun2022	Nov2022 Apr2023 Jul2023	Jan 2024	
SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0114149	PCA0124747	PCA0114143
Sample Date		Client Info		24 May 2024	24 May 2024	20 Mar 2024
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
CONTAMINAT	ION	method	limit/base	current	history1	history2
Water		WC Method	>0.05	NEG	NEG	NEG
WEAR METAL	.S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	<1	<1	0
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>20	0	0	0
Titanium	ppm	ASTM D5185m		0	<1	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>20	1	2	3
Lead	ppm	ASTM D5185m	>20	0	<1	0
Copper	ppm	ASTM D5185m	>20	0	<1	<1
Tin	ppm	ASTM D5185m	>20	<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	<1
Cadmium	ppm	ASTM D5185m		0	0	<1
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	5	0	0	0
Barium	ppm	ASTM D5185m	5	0	<1	<1
Molybdenum	ppm	ASTM D5185m	5	0	<1	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m	25	<1	<1	<1
Calcium	ppm	ASTM D5185m	200	2	0	3
Phosphorus	ppm	ASTM D5185m	300	384	420	443
Zinc	ppm	ASTM D5185m	370	<1	0	<1
Sulfur	ppm	ASTM D5185m	2500	433	442	487
CONTAMINAN	ITS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	2	2	2
Sodium	ppm	ASTM D5185m		<1	0	0
Potassium	ppm	ASTM D5185m	>20	<1	2	1
FLUID CLEAN	LINESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	<u>4</u> 94854	<u> </u>	<u>▲</u> 114996
Particles >6µm		ASTM D7647	>2500	<u> </u>	<u> </u>	<u>▲</u> 27495
Particles >14μm		ASTM D7647	>640	198	226	278
Particles >21µm		ASTM D7647	>160	28	31	22
Particles >38µm		ASTM D7647	>40	0	1	0
Particles >71µm		ASTM D7647		0	0	0
Oil Cleanliness		ISO 4406 (c)	>20/18/16	<u>4</u> 24/21/15	<u>4</u> 24/21/15	<u>4</u> 24/22/15
FLUID DEGRAI	NOITAC	method	limit/base	current	history1	history2




OIL ANALYSIS REPORT

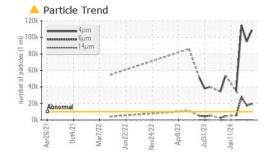

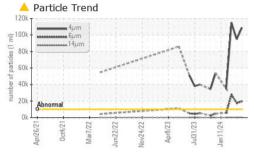






VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPER	RTIES	method	limit/base	current	history1	history2

I LOID I HOI L	III	momod	mm bacc	ourront	Thotory i	inotory.
Visc @ 40°C	cSt	ASTM D445	68	65.77	66.2	66.4

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					

Color		
Bottom		

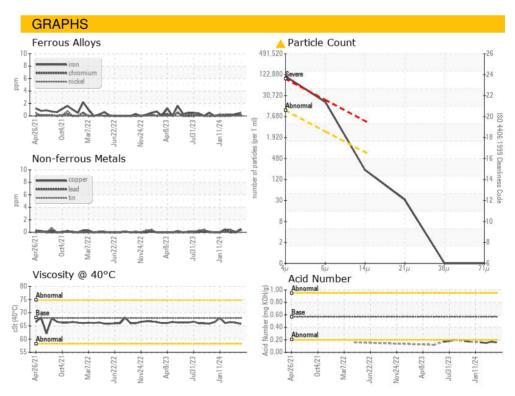





Laboratory Sample No.

Lab Number : 06195401

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : PCA0114149 Unique Number : 11057524

Received **Tested** Diagnosed

: 30 May 2024 : 05 Jun 2024 : 05 Jun 2024 - Jonathan Hester

KraftHeinz - Kirksville - Plant 8333 PCA

2504 INDUSTRIAL DR KIRKSVILLE, MO US 63501

F: (660)627-5887

Contact: WALLACE WARD

wallace.ward@kraftheinzcompany.com T: (660)627-1031

Test Package : IND 2 Certificate 12367 To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)