

OIL ANALYSIS REPORT

Line 5 [Line 5] LINE 5 LINE 5

Gearbox

GEAR OIL (PAG) ISO 220 (--- GAL)

Sample Rating Trend **NORMAL**

DIAGNOSIS

Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) GEAR OIL (PAG) ISO 220. Please confirm. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0128258	PCAI24075	
Sample Date		Client Info		22 May 2024	28 Mar 2013	
Machine Age	hrs	Client Info		0	0	
Oil Age	hrs	Client Info		0	0	
Oil Changed	0	Client Info		Not Changd	N/A	
Sample Status				NORMAL	SEVERE	
CONTAMINAT	ION	method	limit/base	current	history1	history2
	1014					motoryz
Water		WC Method	>0.2	NEG	NEG	
WEAR METAL	S	method	limit/base	current	history1	history2
PQ		ASTM D8184		13	1 156	
Iron	ppm	ASTM D5185m	>200	0	1297	
Chromium	ppm	ASTM D5185m	>15	0	<u> 11</u>	
Nickel	ppm	ASTM D5185m	>15	0	2	
Titanium	ppm	ASTM D5185m		0	1	
Silver	ppm	ASTM D5185m		0	<1	
Aluminum	ppm	ASTM D5185m	>25	0	4	
Lead	ppm	ASTM D5185m	>100	0	33	
Copper	ppm	ASTM D5185m	>200	0	<u> </u>	
Tin	ppm	ASTM D5185m	>25	<1	<u>12</u>	
Antimony	ppm	ASTM D5185m	>5		0	
Vanadium	ppm	ASTM D5185m		0	<1	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	5	0	4	
Barium	ppm	ASTM D5185m	5	0	0	
Molybdenum	ppm	ASTM D5185m	5	0	0	
Manganese	ppm	ASTM D5185m		<1	16	
Magnesium	ppm	ASTM D5185m	5	0	0	
Calcium	ppm	ASTM D5185m	5	0	0	
Phosphorus	ppm	ASTM D5185m	775	552	294	
Zinc	ppm	ASTM D5185m	5	5	16	
Sulfur	ppm	ASTM D5185m	2000	882	12897	
CONTAMINAN	ITS _	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	11	<u> </u>	
Sodium	ppm	ASTM D5185m		0	2	
Potassium	ppm	ASTM D5185m	>20	0	<1	
FLUID DEGRAI	DATION	method	limit/base	current	history1	history2
	1/011/	AOTA DOO45	0.00	0.00	0.400	


0.63

Acid Number (AN) mg KOH/g ASTM D8045 2.00

0.483



OIL ANALYSIS REPORT

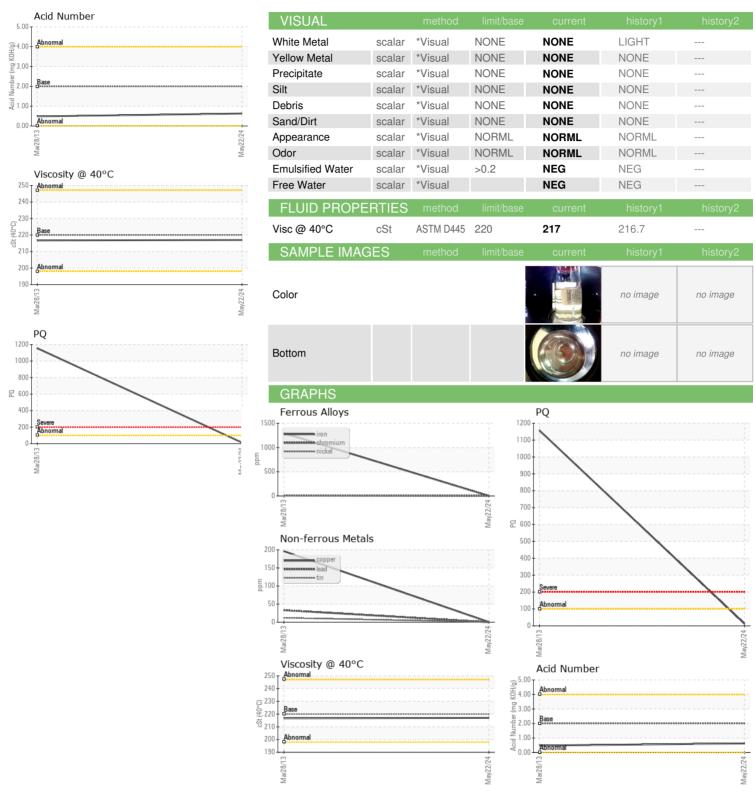





Laboratory

Sample No. Lab Number : 06195599 Unique Number : 11057722

: PCA0128258

 st - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received

: 30 May 2024 **Tested** : 31 May 2024 Diagnosed : 31 May 2024 - Wes Davis

THE HERSHEY COMPANY

WEST HERSHEY - TECHNICAL ASSURANCE, 1033 OLDE WEST CHOCOLATE HERSHEY, PA US 17033 Contact: BILL GEZIK

Test Package : IND 2 (Additional Tests: PQ) Certificate 12367 To discuss this sample report, contact Customer Service at 1-800-237-1369.

Contact/Location: BILL GEZIK - HERHER

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (717)374-4594

bgezik@hersheys.com

T: