

# **OIL ANALYSIS REPORT**

Sample Number

# Area **Dixon Transport-Tractor** [Dixon Transport-Tractor] 325A325523

**Diesel Engine** 

PETRO CANADA DURON SHP 10W30 (11 GAL)

## DIAGNOSIS

#### Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

### 🔺 Wear


The copper level is abnormal. In the absence of other significant wear metals, suspect copper due to sources other than wear (i.e. cooling core). All other metal levels are typical for a new component breaking in.

#### Contamination


Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. No other contaminants were detected in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

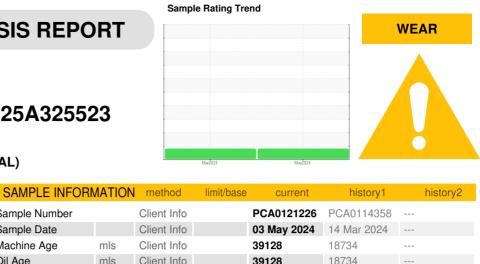

Sample Date		Client Info		03 May 2024	14 Mar 2024	
Machine Age	mls	Client Info		39128	18734	
Oil Age	mls	Client Info		39128	18734	
Oil Changed	11115	Client Info		Changed	Not Changd	
Sample Status				ABNORMAL	ABNORMAL	
-						
CONTAMINAT	ION	method	limit/base	current	history1	history2
Fuel		WC Method	>5	<1.0	<1.0	
Water		WC Method	>0.2	NEG	NEG	
Glycol		WC Method		NEG	NEG	
WEAR METAL	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>80	63	38	
Chromium	ppm	ASTM D5185m	>5	5	2	
Nickel	ppm	ASTM D5185m	>2	2	3	
Titanium	ppm	ASTM D5185m		<1	0	
Silver	ppm	ASTM D5185m	>3	<1	<1	
Aluminum	ppm	ASTM D5185m	>30	36	15	
Lead	ppm	ASTM D5185m	>30	0	3	
Copper	ppm	ASTM D5185m	>150	<u> </u>	<b>2</b> 84	
Tin	ppm	ASTM D5185m	>5	15	13	
Vanadium	ppm	ASTM D5185m		0	<1	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	33	46	
Barium	ppm	ASTM D5185m	0	<1	0	
Molybdenum	ppm	ASTM D5185m	50	43	40	
Manganese	ppm	ASTM D5185m	0	5	4	
Magnesium	ppm	ASTM D5185m	950	544	496	
Calcium	ppm	ASTM D5185m	1050	1754	1798	
Phosphorus	ppm	ASTM D5185m	995	760	728	
Zinc	ppm	ASTM D5185m	1180	894	862	
Sulfur	ppm	ASTM D5185m	2600	2178	2517	
CONTAMINAN	ITS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	8	6	
Sodium	ppm	ASTM D5185m		6	5	
Potassium	ppm	ASTM D5185m	>20	98	44	
INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.6	0.3	
Nitration	Abs/cm	*ASTM D7624	>20	10.4	7.7	
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.9	23.0	
FLUID DEGRA		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	24.4	21.4	
Base Number (BN)	mg KOH/g			7.4	8.8	
. /	÷ 0					

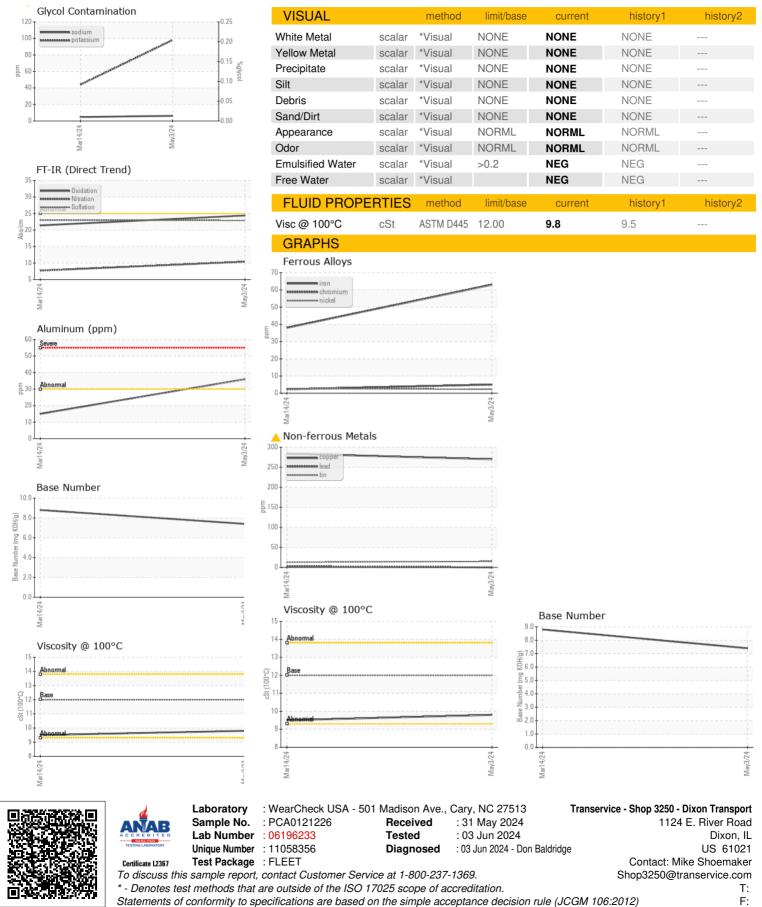

**OIL ANALYSIS REPORT** 

OIL

DIAGNOSTICS

Submitted By: Mike Shoemaker

Page 2 of 2