




# OIL ANALYSIS REPORT

Sample Rating Trend

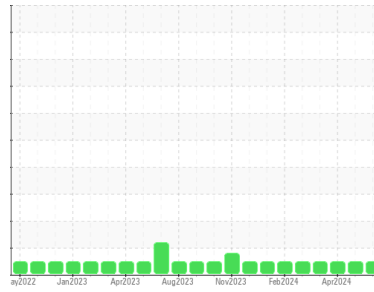

**NORMAL**



Machine Id  
**731112-310100**

Component  
**Natural Gas Engine**

Fluid  
**PETRO CANADA DURON GEO LD 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0120151</b>	GFL0117228	GFL0117180
Sample Date	Client Info	<b>29 May 2024</b>	13 May 2024	12 Apr 2024
Machine Age	hrs	<b>7058</b>	6952	6738
Oil Age	hrs	<b>0</b>	0	0
Oil Changed	Client Info	<b>Not Changed</b>	Not Changed	Not Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.1	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >50	<b>10</b>	4	8
Chromium	ppm	ASTM D5185m >4	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >9	<b>2</b>	1	1
Lead	ppm	ASTM D5185m >30	<b>3</b>	0	<1
Copper	ppm	ASTM D5185m >35	<b>1</b>	<1	1
Tin	ppm	ASTM D5185m >4	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 50	<b>24</b>	11	8
Barium	ppm	ASTM D5185m 5	<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185m 50	<b>57</b>	47	47
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 560	<b>610</b>	537	462
Calcium	ppm	ASTM D5185m 1510	<b>1708</b>	1455	1582
Phosphorus	ppm	ASTM D5185m 780	<b>992</b>	714	680
Zinc	ppm	ASTM D5185m 870	<b>1093</b>	908	863
Sulfur	ppm	ASTM D5185m 2040	<b>3073</b>	2773	2731

## CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >+100	<b>4</b>	15	4
Sodium	ppm	ASTM D5185m	<b>6</b>	4	7
Potassium	ppm	ASTM D5185m >20	<b>2</b>	0	8

## INFRA-RED

method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	<b>0.1</b>	0	0
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.9</b>	10.3	11.1
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.0</b>	20.3	22.4


## FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>15.7</b>	16.9	17.8
Base Number (BN)	mg KOH/g	ASTM D2896 10.2	<b>7.2</b>	5.3	3.6




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

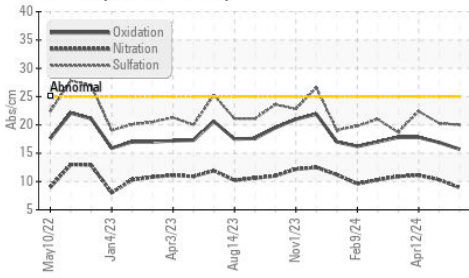

Base Number

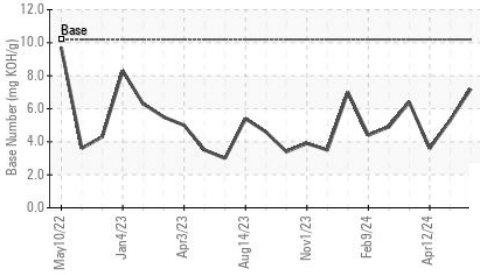

Viscosity @ 100°C

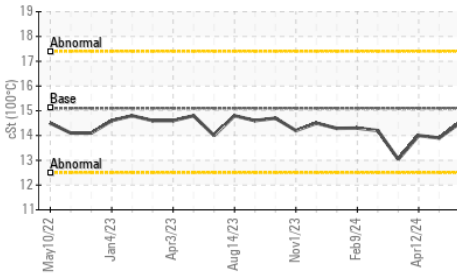


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.1	14.5	13.9

## GRAPHS


Ferrous Alloys

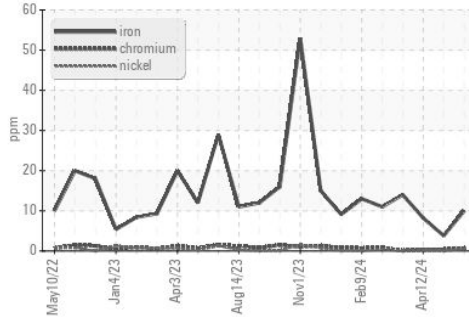


Non-ferrous Metals

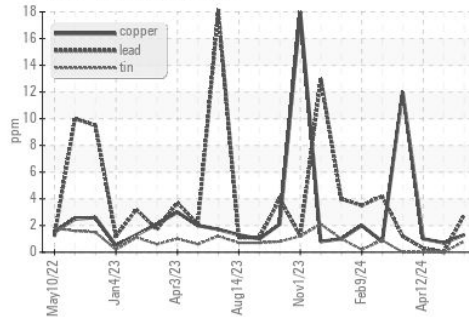

Viscosity @ 100°C

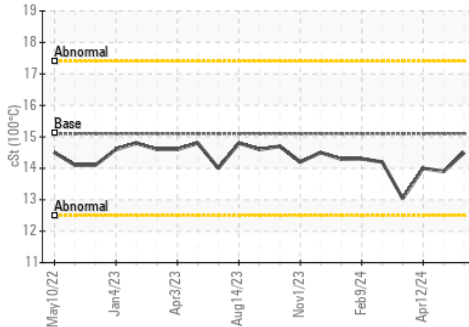

Base Number

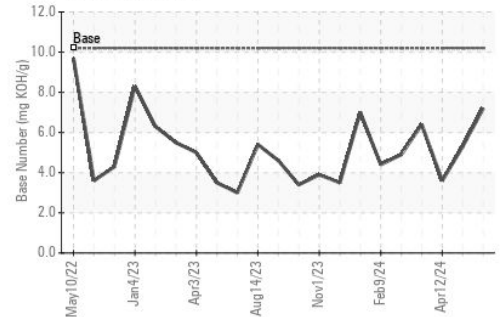

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0120151  
 Lab Number : 06196307  
 Unique Number : 11058430  
 Test Package : FLEET

Received : 31 May 2024  
 Tested : 03 Jun 2024  
 Diagnosed : 03 Jun 2024 - Wes Davis

GFL Environmental - 836 - Kansas City Hauling  
 7801 East Truman Road  
 Kansas City, MO  
 US 64126  
 Contact: Loyce Stewart  
 loyce.stewart@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: