

# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**



Area  
**(P1184782) Preferred Service-Tractor**  
 Machine Id  
**[Preferred Service-Tractor] 192A32024B**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON UHP 5W30 (36 QTS)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0123685</b>	PCA0115800	---
Sample Date	Client Info			<b>24 May 2024</b>	27 Jan 2024	---
Machine Age	mls	Client Info		<b>77418</b>	57480	---
Oil Age	mls	Client Info		<b>19938</b>	57480	---
Oil Changed	Client Info			<b>Not Chngd</b>	Changed	---
Sample Status				<b>NORMAL</b>	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>6.0		<b>&lt;1.0</b>	<1.0	---
Water	WC Method	>0.2		<b>NEG</b>	NEG	---
Glycol	WC Method			<b>NEG</b>	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>31</b>	57	---
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	---
Nickel	ppm	ASTM D5185m	>2	<b>&lt;1</b>	2	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Silver	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	---
Aluminum	ppm	ASTM D5185m	>25	<b>5</b>	13	---
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	<1	---
Copper	ppm	ASTM D5185m	>330	<b>38</b>	136	---
Tin	ppm	ASTM D5185m	>15	<b>2</b>	4	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	---




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	<b>17</b>	10	---
Barium	ppm	ASTM D5185m	0	<b>&lt;1</b>	2	---
Molybdenum	ppm	ASTM D5185m	64	<b>62</b>	67	---
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m	1160	<b>1150</b>	1115	---
Calcium	ppm	ASTM D5185m	820	<b>911</b>	846	---
Phosphorus	ppm	ASTM D5185m	1160	<b>1150</b>	884	---
Zinc	ppm	ASTM D5185m	1260	<b>1306</b>	1233	---
Sulfur	ppm	ASTM D5185m	3000	<b>3439</b>	2554	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>7</b>	12	---
Sodium	ppm	ASTM D5185m		<b>3</b>	4	---
Potassium	ppm	ASTM D5185m	>20	<b>15</b>	46	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.5</b>	0.9	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.6</b>	11.9	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>22.4</b>	25.7	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>20.1</b>	24.7	---
Base Number (BN)	mg KOH/g	ASTM D2896	11.0	<b>7.1</b>	5.0	---





# OIL ANALYSIS REPORT

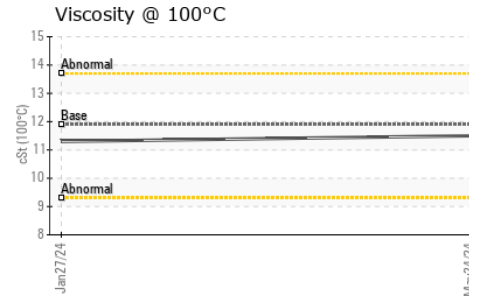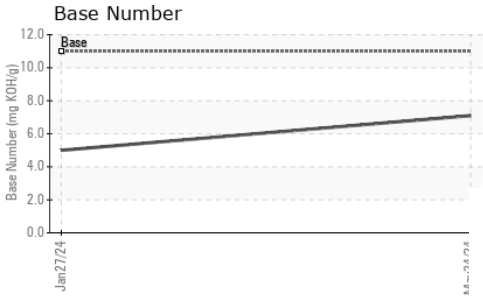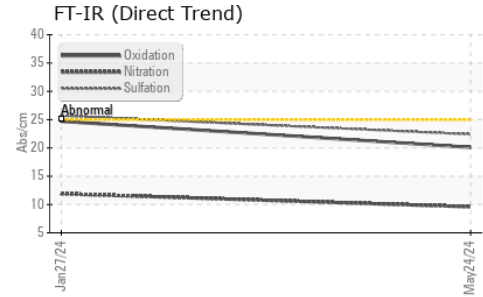

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	11.9	<b>11.5</b>	11.3

## GRAPHS

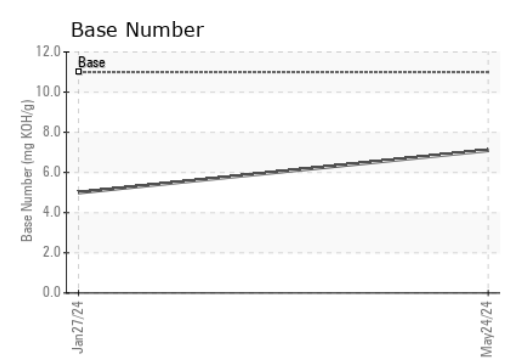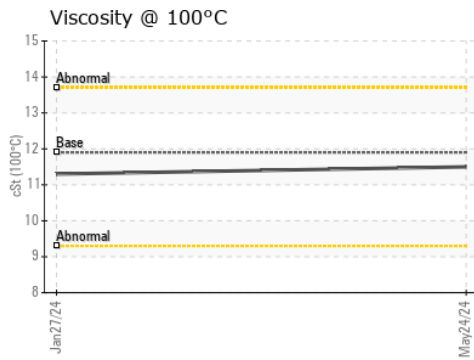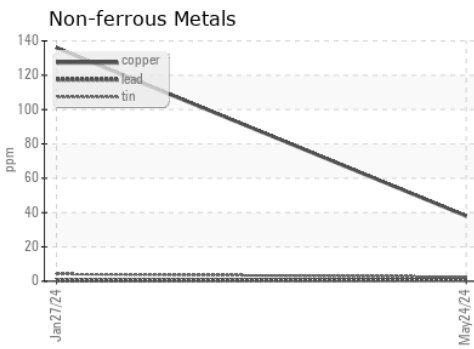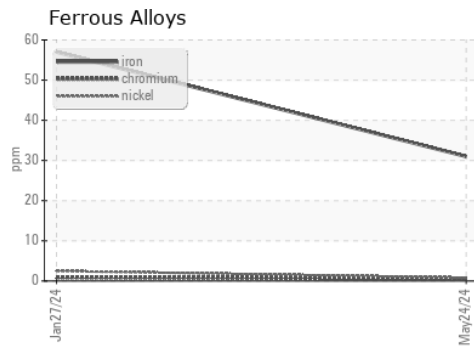

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0123685      **Received** : 31 May 2024  
**Lab Number** : **06196326**      **Tested** : 03 Jun 2024  
**Unique Number** : 11058449      **Diagnosed** : 03 Jun 2024 - Wes Davis  
**Test Package** : FLEET

**Transervice - Shop 1920 - Preferred Service**  
 1955 W. North Avenue, Bldg K  
 Melrose Park, IL  
 US 60160  
 Contact: Tom Lindeman  
 tlindemann@transervice.com  
 T: (630)376-8946  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)