



PROBLEM SUMMARY


Area
(YA154643)

Machine Id
12031

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (9 GAL)



Sample Rating Trend

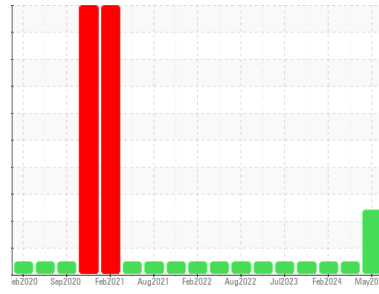

FUEL



COMPONENT CONDITION SUMMARY

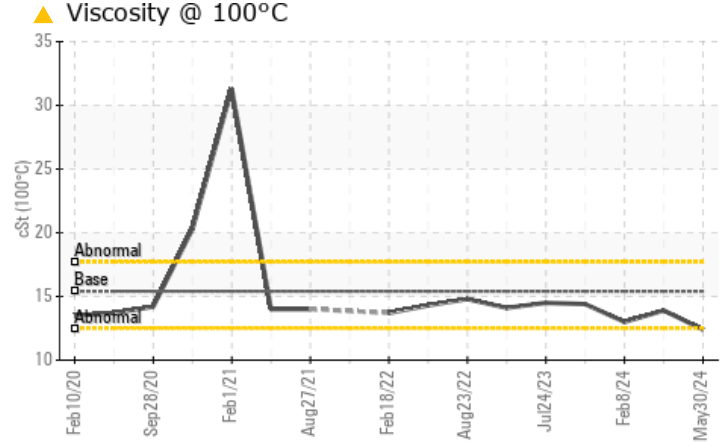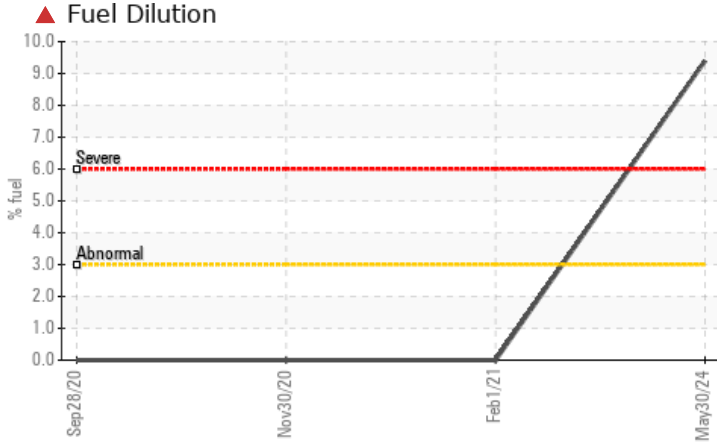

RECOMMENDATION

We advise that you check the fuel injection system. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	NORMAL	NORMAL
Fuel	%	ASTM D3524	>3.0	▲ 9.4	<1.0	<1.0
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 12.4	13.9	13.0

Customer Id: GFL112
Sample No.: GFL0118003
Lab Number: 06196469
Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
Wes Davis +1 905-569-8600 x223
wesd@wearcheck.ca

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	We recommend that you drain the oil from the component if this has not already been done.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Fuel/injector System	---	---	?	We advise that you check the fuel injection system.

HISTORICAL DIAGNOSIS

NORMAL



02 Apr 2024 Diag: Wes Davis

Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

view report



NORMAL



08 Feb 2024 Diag: Wes Davis

Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

view report



NORMAL



05 Dec 2023 Diag: Wes Davis

Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

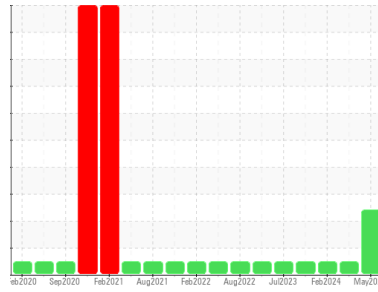

FUEL



Area
(YA154643)

Machine Id
12031

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (9 GAL)

DIAGNOSIS

Recommendation

We advise that you check the fuel injection system. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0118003	GFL0110395	GFL0101382
Sample Date	Client Info	30 May 2024	02 Apr 2024	08 Feb 2024
Machine Age	hrs	Client Info	0	0
Oil Age	hrs	Client Info	0	0
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		SEVERE	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2	
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>90	31	10	6
Chromium	ppm	ASTM D5185m	>20	1	<1	<1
Nickel	ppm	ASTM D5185m	>2	0	0	0
Titanium	ppm	ASTM D5185m	>2	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>20	3	2	2
Lead	ppm	ASTM D5185m	>40	0	0	1
Copper	ppm	ASTM D5185m	>330	2	<1	<1
Tin	ppm	ASTM D5185m	>15	<1	0	0
Vanadium	ppm	ASTM D5185m		0	<1	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES

method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m	0	10	9	11
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	60	54	65	55
Manganese	ppm	ASTM D5185m	0	<1	0	1
Magnesium	ppm	ASTM D5185m	1010	836	1016	807
Calcium	ppm	ASTM D5185m	1070	941	1205	948
Phosphorus	ppm	ASTM D5185m	1150	921	1079	883
Zinc	ppm	ASTM D5185m	1270	1088	1361	1128
Sulfur	ppm	ASTM D5185m	2060	2931	3855	2543

CONTAMINANTS

method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m	>25	6	3	0
Sodium	ppm	ASTM D5185m		35	5	12
Potassium	ppm	ASTM D5185m	>20	<1	0	1
Fuel	%	ASTM D3524	>3.0	▲ 9.4	<1.0	<1.0

INFRA-RED





method	limit/base	current	history1	history2		
Soot %	%	*ASTM D7844	>6	0.9	0.2	0.2
Nitration	Abs/cm	*ASTM D7624	>20	12.5	7.0	7.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	23.4	18.4	18.7

FLUID DEGRADATION

method	limit/base	current	history1	history2		
Oxidation	Abs/.1mm	*ASTM D7414	>25	24.9	14.4	14.5
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	6.6	8.2	7.3







OIL ANALYSIS REPORT

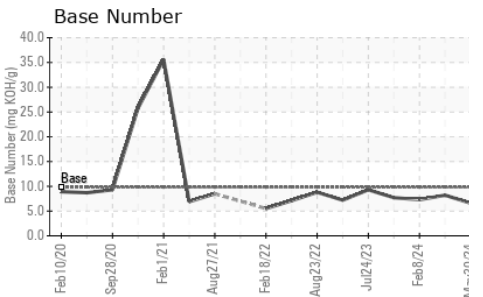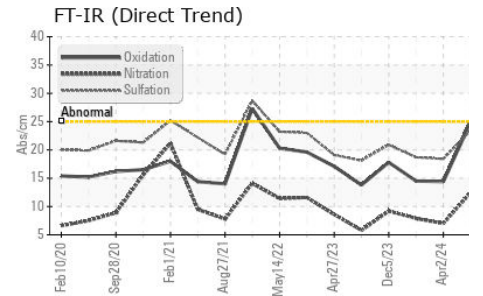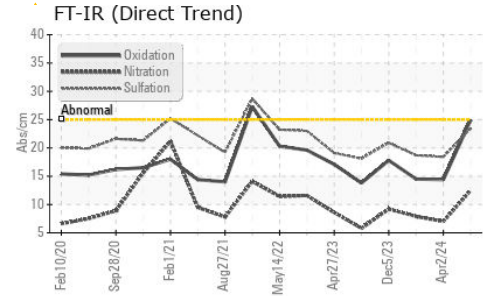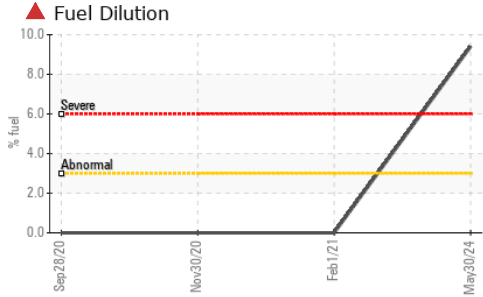

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 12.4	13.9

GRAPHS

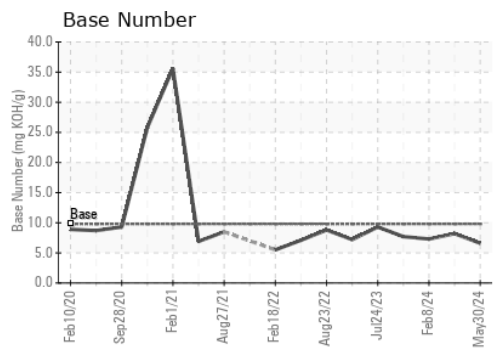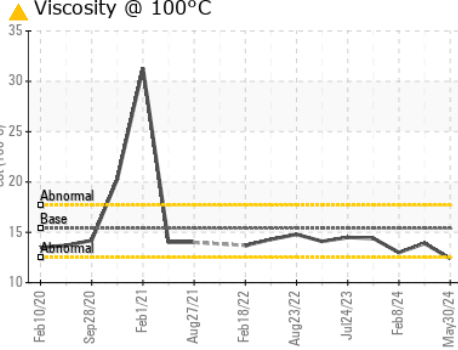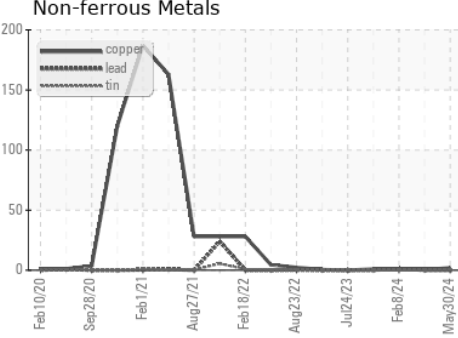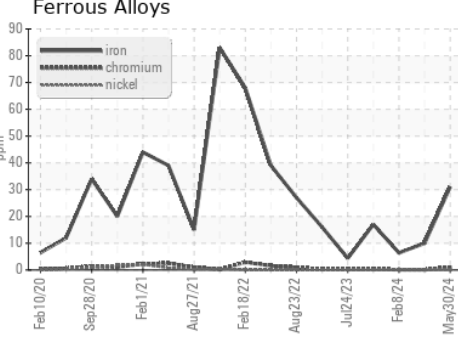

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0118003 **Received** : 31 May 2024
Lab Number : 06196469 **Tested** : 05 Jun 2024
Unique Number : 11058592 **Diagnosed** : 05 Jun 2024 - Wes Davis
Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

GFL Environmental - 112 - New Bern
 705 Airport Road
 New Bern, NC
 US 28560
 Contact: Marquis Williams
 marquis.williams@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)