


OIL ANALYSIS REPORT

Area
Plymouth & Brockton
 Machine Id
11413
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (39 QTS)

Sample Rating Trend

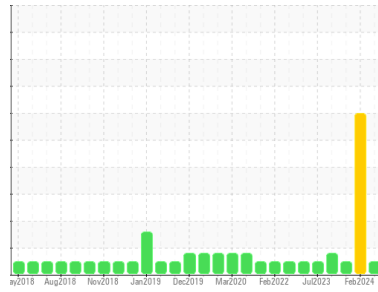

NORMAL



DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PCA0090550	PCA0090545	PCA0104409
Sample Date	Client Info			14 May 2024	21 Feb 2024	03 Nov 2023
Machine Age	mls	Client Info		559684	547352	581107
Oil Age	mls	Client Info		12000	24000	12000
Oil Changed	Client Info			Not Changed	Changed	Not Changed
Sample Status				NORMAL	SEVERE	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>3.0		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	40	61	28
Chromium	ppm	ASTM D5185m	>10	2	2	1
Nickel	ppm	ASTM D5185m	>4	<1	<1	0
Titanium	ppm	ASTM D5185m	>2	<1	0	0
Silver	ppm	ASTM D5185m	>2	<1	0	0
Aluminum	ppm	ASTM D5185m	>30	3	7	2
Lead	ppm	ASTM D5185m	>30	27	▲ 105	4
Copper	ppm	ASTM D5185m	>30	7	16	<1
Tin	ppm	ASTM D5185m	>4	4	7	1
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		<1	0	0




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	3	5	7
Barium	ppm	ASTM D5185m	0	2	0	0
Molybdenum	ppm	ASTM D5185m	60	73	64	66
Manganese	ppm	ASTM D5185m	0	<1	<1	<1
Magnesium	ppm	ASTM D5185m	1010	1112	1066	1039
Calcium	ppm	ASTM D5185m	1070	1266	1189	1165
Phosphorus	ppm	ASTM D5185m	1150	1327	1020	1138
Zinc	ppm	ASTM D5185m	1270	1463	1318	1387
Sulfur	ppm	ASTM D5185m	2060	3457	3196	3115

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>30	8	12	6
Sodium	ppm	ASTM D5185m		1	5	2
Potassium	ppm	ASTM D5185m	>20	2	0	0

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.8	2.2	1.6
Nitration	Abs/cm	*ASTM D7624	>20	12.0	15.4	12.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	27.4	31.1	25.6

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	26.0	29.6	22.8
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	8.31	7.59	8.05









OIL ANALYSIS REPORT

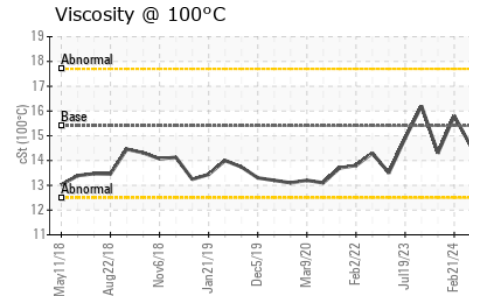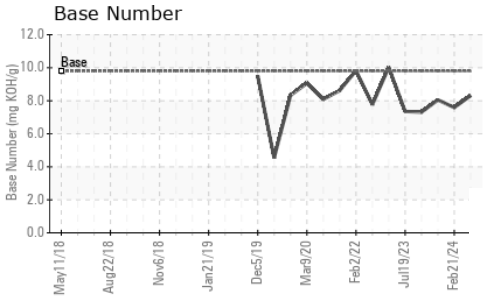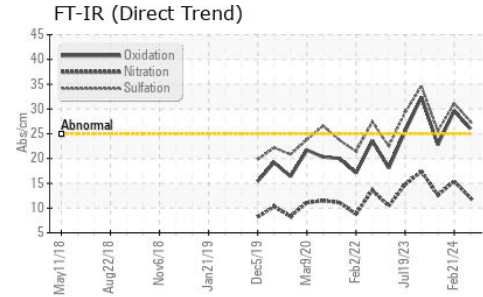

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	14.6	15.8	14.3

GRAPHS

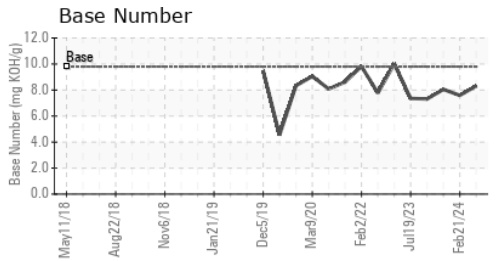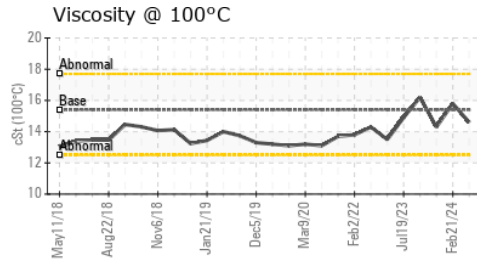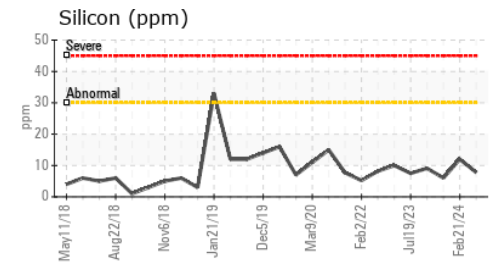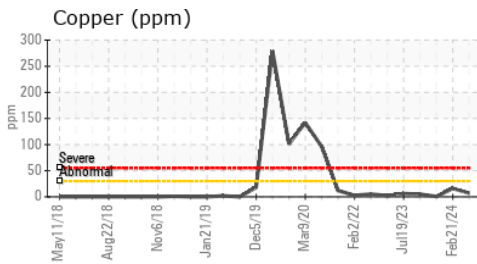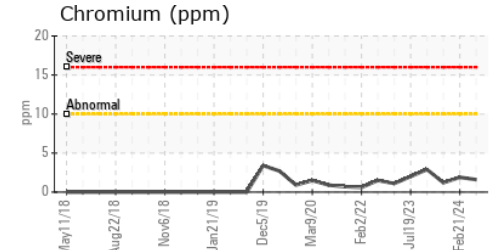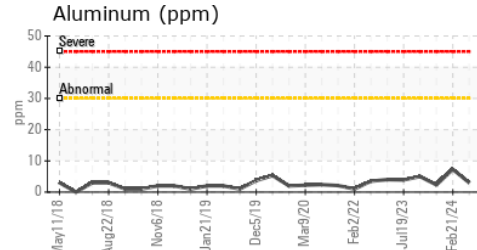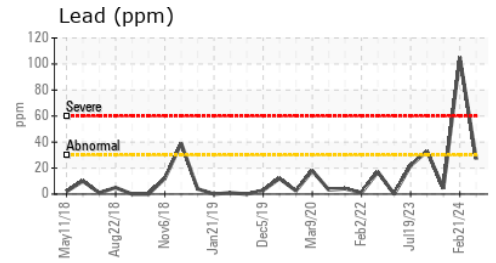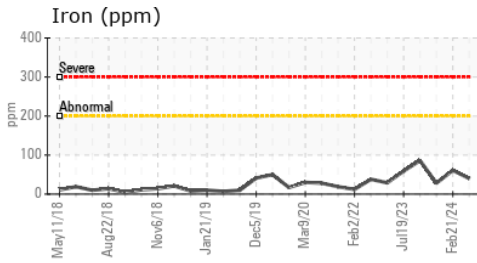

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0090550 **Received** : 31 May 2024
Lab Number : 06196879 **Tested** : 03 Jun 2024
Unique Number : 11059002 **Diagnosed** : 03 Jun 2024 - Sean Felton
Test Package : MOB 2

PLYMOUTH & BROCKTON
 8 INDUSTRIAL PARK RD
 PLYMOUTH, MA
 US 02360
 Contact: Donald Pelquin
 Dpelquin@P-B.com
 T: (508)732-6039
 F: (508)732-6091

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)