


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

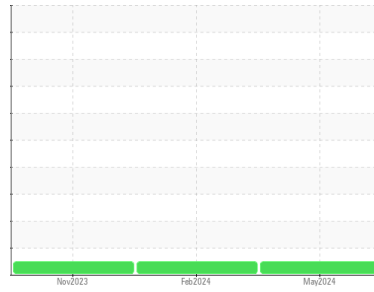

Area
(SPG413848) Air Gas - Tractor
 Machine Id
[Air Gas - Tractor] 314A314007
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (11 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PCA0120033	PCA0096891	PCA0096888
Sample Date	Client Info			08 May 2024	07 Feb 2024	09 Nov 2023
Machine Age	mls Client Info			76075	53898	34650
Oil Age	mls Client Info			22177	19248	0
Oil Changed	Client Info			Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>80	23	29	40
Chromium	ppm	ASTM D5185m	>5	1	1	2
Nickel	ppm	ASTM D5185m	>2	0	<1	<1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>3	0	<1	<1
Aluminum	ppm	ASTM D5185m	>30	10	11	19
Lead	ppm	ASTM D5185m	>30	0	<1	<1
Copper	ppm	ASTM D5185m	>150	54	120	219
Tin	ppm	ASTM D5185m	>5	0	<1	1
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	0	9	19
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	50	61	58	64
Manganese	ppm	ASTM D5185m	0	<1	1	2
Magnesium	ppm	ASTM D5185m	950	1000	897	916
Calcium	ppm	ASTM D5185m	1050	1171	1161	1368
Phosphorus	ppm	ASTM D5185m	995	1037	1008	1081
Zinc	ppm	ASTM D5185m	1180	1254	1295	1358
Sulfur	ppm	ASTM D5185m	2600	2782	2577	2494

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	1	4	4
Sodium	ppm	ASTM D5185m		3	2	4
Potassium	ppm	ASTM D5185m	>20	23	26	46

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.7	0.6	0.6
Nitration	Abs/cm	*ASTM D7624	>20	8.4	8.6	8.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.1	20.2	20.9

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.3	16.8	18.0
Base Number (BN)	mg KOH/g	ASTM D2896		7.7	7.2	6.8





OIL ANALYSIS REPORT

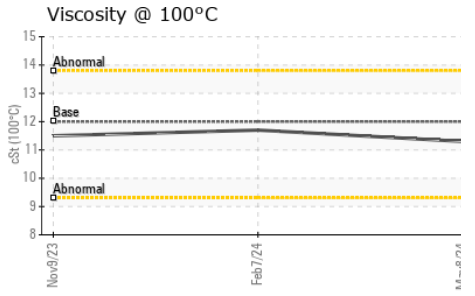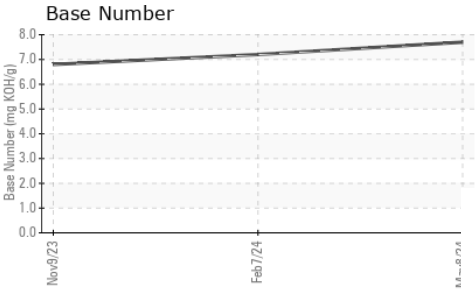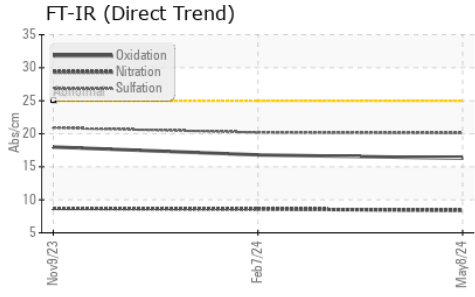

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	11.3	11.7

GRAPHS

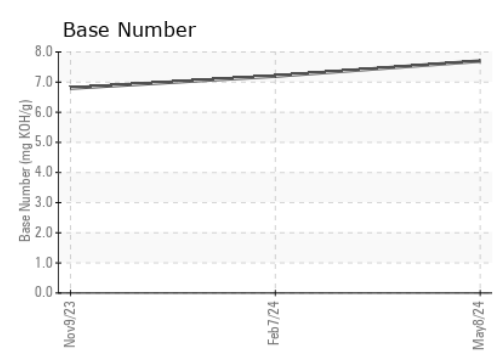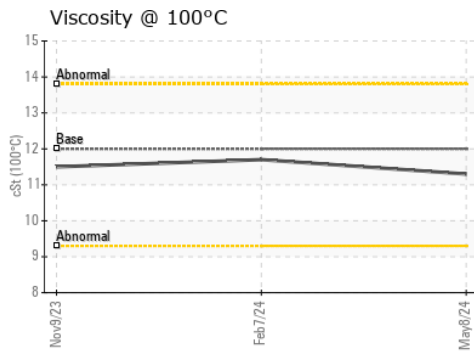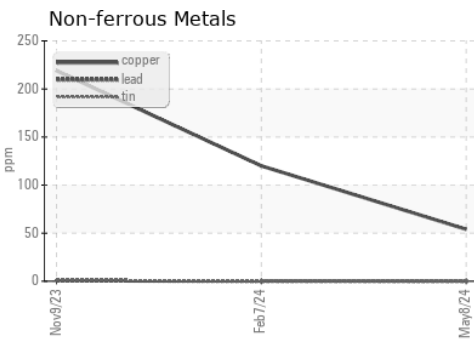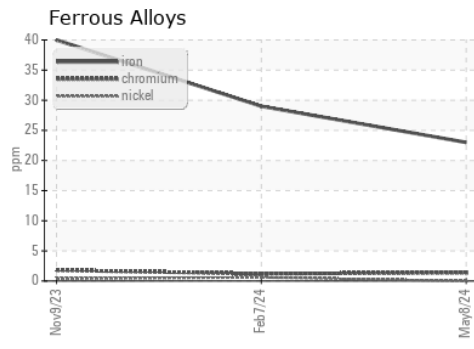

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0120033 **Received** : 03 Jun 2024
Lab Number : 06197267 **Tested** : 03 Jun 2024
Unique Number : 11059390 **Diagnosed** : 03 Jun 2024 - Wes Davis
Test Package : FLEET

Transervice - Shop 3140 - Platte River
 2455 S Platte River
 Denver, CO
 US 80223
 Contact: Mike Duran
 mduran@transervice.com

To discuss this sample report, CONTACT Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)