


OIL ANALYSIS REPORT



Machine Id 720068 **Diesel Engine**

PETRO CANADA DURON SHP 15W40 (--- GAL)





DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

There is no indication of any contamination in the


Fluid Condition


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.


1011-101	•					
SAMPLE INFORI	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		GFL0120373	GFL0066291	
Sample Date		Client Info		07 May 2024	01 Apr 2024	
Machine Age	hrs	Client Info		0	0	
Oil Age	hrs	Client Info		0	0	
Oil Changed		Client Info		N/A	N/A	
Sample Status				NORMAL	NORMAL	
CONTAMINAT	ION	method	limit/base	current	history1	history2
Fuel		WC Method	>5	<1.0	<1.0	
Water		WC Method	>0.2	NEG	NEG	
Glycol		WC Method		NEG	NEG	
WEAR METAL	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>80	5	32	
Chromium	ppm	ASTM D5185m	>5	0	<1	
Nickel	ppm	ASTM D5185m	>2	0	0	
Titanium	ppm	ASTM D5185m		0	0	
Silver	ppm	ASTM D5185m	>3	0	0	
Aluminum	ppm	ASTM D5185m	>30	2	5	
Lead	ppm	ASTM D5185m	>30	0	2	
Copper	ppm	ASTM D5185m	>150	<1	2	
Tin	ppm	ASTM D5185m	>5	0	0	
Vanadium	ppm	ASTM D5185m		0	<1	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	4	
Barium	ppm	ASTM D5185m	0	0	0	
Molybdenum	ppm	ASTM D5185m	60	58	65	
Manganese	ppm	ASTM D5185m	0	0	<1	
Magnesium		710 TWI DOTOOTTI		· ·		
Calcium	ppm	ASTM D5185m	1010	967	981	
Calcium	ppm ppm			_	981 1196	
		ASTM D5185m		967		
Phosphorus	ppm	ASTM D5185m ASTM D5185m	1070	967 1134	1196	
Phosphorus Zinc	ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m	1070 1150	967 1134 1052	1196 984	
Phosphorus Zinc	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	1070 1150 1270	967 1134 1052 1249	1196 984 1227	
Phosphorus Zinc Sulfur CONTAMINAN	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	1070 1150 1270 2060	967 1134 1052 1249 3573	1196 984 1227 3424	
Phosphorus Zinc Sulfur CONTAMINAN Silicon	ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m method	1070 1150 1270 2060 limit/base	967 1134 1052 1249 3573	1196 984 1227 3424 history1	 history2
Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium	ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D5185m	1070 1150 1270 2060 limit/base	967 1134 1052 1249 3573 current	1196 984 1227 3424 history1	 history2
Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium	ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m Method ASTM D5185m ASTM D5185m	1070 1150 1270 2060 limit/base >20	967 1134 1052 1249 3573 current 0	1196 984 1227 3424 history1 5	 history2
Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED	ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m MSTM D5185m Method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	1070 1150 1270 2060 limit/base >20 >20	967 1134 1052 1249 3573 current 0 4	1196 984 1227 3424 history1 5 7	 history2
Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot %	ppm ppm ppm ppm ppm	ASTM D5185m	1070 1150 1270 2060 limit/base >20 >20	967 1134 1052 1249 3573 current 0 4 <1	1196 984 1227 3424 history1 5 7 5 history1	 history2 history2
Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot % Nitration	ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m Method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m Method *ASTM D7844	1070 1150 1270 2060 limit/base >20 >20 limit/base	967 1134 1052 1249 3573 current 0 4 <1 current	1196 984 1227 3424 history1 5 7 5 history1	 history2 history2
Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot % Nitration	ppm	ASTM D5185m method *ASTM D7844 *ASTM D7624 *ASTM D7415	1070 1150 1270 2060 limit/base >20 >20 limit/base >3 >20	967 1134 1052 1249 3573	1196 984 1227 3424 history1 5 7 5 history1 1.1	history2 history2
Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot % Nitration Sulfation	ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m Method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D7844 *ASTM D7624 *ASTM D7415	1070 1150 1270 2060 limit/base >20 >20 limit/base >3 >20 >3	967 1134 1052 1249 3573	1196 984 1227 3424 history1 5 7 5 history1 1.1 11.4 22.4	history2 history2




OIL ANALYSIS REPORT









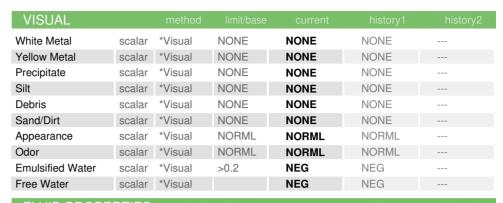



FLUID PROPI	ERITES	method	limit/base		history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	14.2	13.8	

GRAPHS







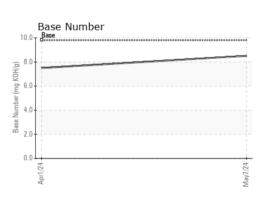





Laboratory Sample No.

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : GFL0120373 Lab Number : 06197317 Unique Number : 11059440

Received **Tested** Diagnosed

: 03 Jun 2024 : 03 Jun 2024 : 03 Jun 2024 - Wes Davis

GFL Environmental - 938 - Hager City W9724 WIS-35 HAGER CITY, WI US 54014

Contact: ANDY KANE

Test Package : FLEET Certificate 12367 To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: See also GFL904,A,B,C, 927, 938 - ANDY KANE - GFL938

F:

T: (715)202-3420