


OIL ANALYSIS REPORT



Machine Id
CATERPILLAR 980M L56
 Component
Hydraulic System
 Fluid
AMERICAN CHEMICAL TECH. ECOSAFE FR-46 (--- GAL)

Sample Rating Trend

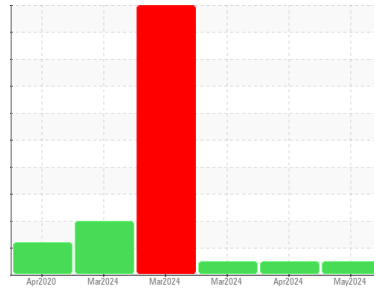

NORMAL

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	PCA0123760	PCA0118476	PCA0118493	
Sample Date	Client Info	21 May 2024	30 Apr 2024	28 Mar 2024	
Machine Age	hrs	Client Info	17212	16917	16686
Oil Age	hrs	Client Info	866	500	0
Oil Changed	Client Info	Not Chngd	Not Chngd	Changed	
Sample Status		NORMAL	NORMAL	NORMAL	

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.1	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >20	2	2	10
Chromium	ppm ASTM D5185m >10	<1	0	<1
Nickel	ppm ASTM D5185m >10	0	0	0
Titanium	ppm ASTM D5185m	0	0	0
Silver	ppm ASTM D5185m	0	0	0
Aluminum	ppm ASTM D5185m >10	<1	0	<1
Lead	ppm ASTM D5185m >10	0	0	<1
Copper	ppm ASTM D5185m >75	16	9	42
Tin	ppm ASTM D5185m >10	0	0	<1
Vanadium	ppm ASTM D5185m	0	0	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	0	0	0
Barium	ppm ASTM D5185m	0	0	0
Molybdenum	ppm ASTM D5185m	0	0	0
Manganese	ppm ASTM D5185m	<1	<1	1
Magnesium	ppm ASTM D5185m	<1	0	2
Calcium	ppm ASTM D5185m	9	5	8
Phosphorus	ppm ASTM D5185m	726	650	659
Zinc	ppm ASTM D5185m	49	20	55
Sulfur	ppm ASTM D5185m	2405	2149	3994

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >20	0	0	<1
Sodium	ppm ASTM D5185m	<1	<1	2
Potassium	ppm ASTM D5185m >20	<1	<1	3





FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >5000	1117	2180	4135
Particles >6µm	ASTM D7647 >1300	241	504	227
Particles >14µm	ASTM D7647 >160	24	42	11
Particles >21µm	ASTM D7647 >40	6	13	3
Particles >38µm	ASTM D7647 >10	0	1	0
Particles >71µm	ASTM D7647 >3	0	0	0
Oil Cleanliness	ISO 4406 (c) >19/17/14	17/15/12	18/16/13	19/15/11

FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g ASTM D8045	0.46	0.51	0.46


OIL ANALYSIS REPORT

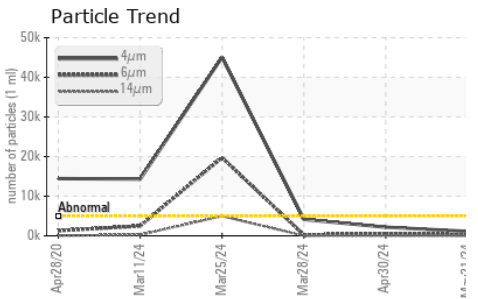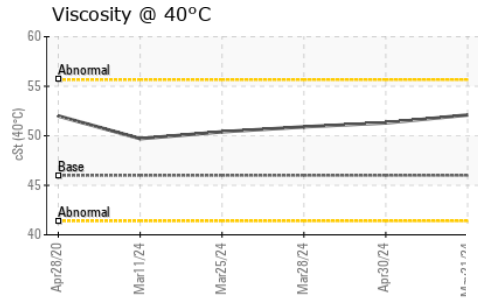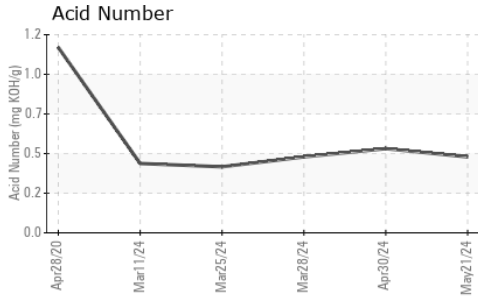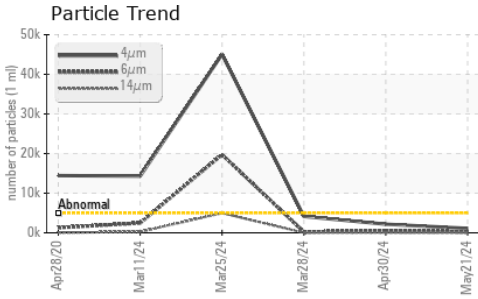





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	52.1	51.3

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

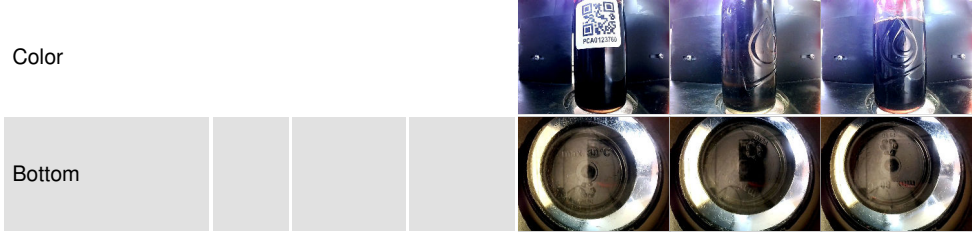

GRAPHS

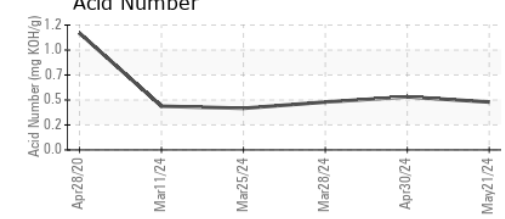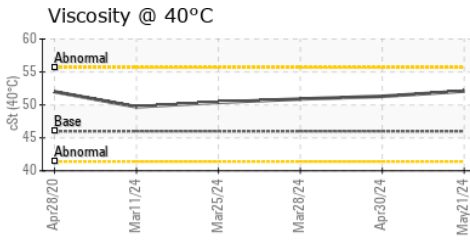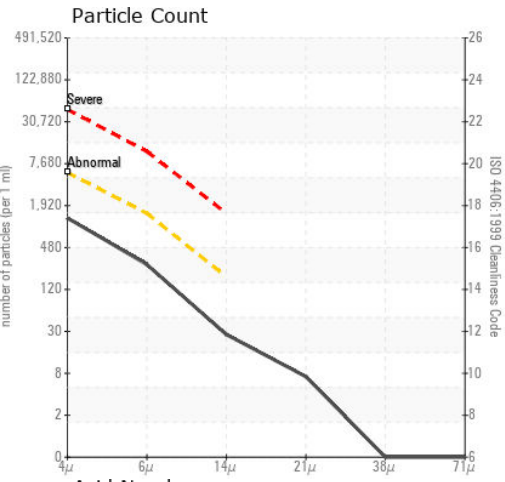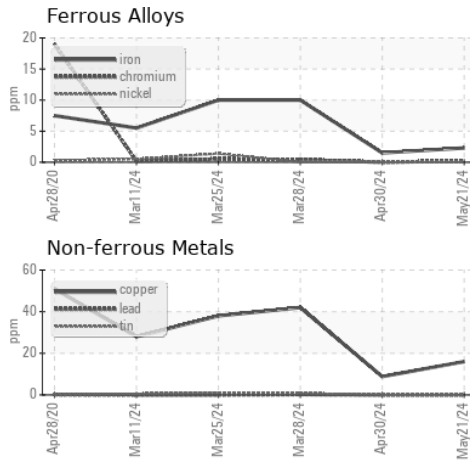

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0123760
Lab Number : 06197579
Unique Number : 11059702
Test Package : MOB 2

Received : 03 Jun 2024
Tested : 04 Jun 2024
Diagnosed : 04 Jun 2024 - Wes Davis

SCRAP METAL SERVICES (SMS Mill Services LLC)
 1500 COMMERCIAL AVE
 MINGO JUNCTION, OH
 US 43938
 Contact: FRANK NALLY
 fnally@scrapmetalservices.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)