


OIL ANALYSIS REPORT

Sample Rating Trend



WEAR

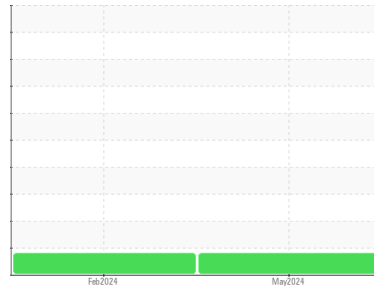

Machine Id
L-7
 Component
Front Right Final Drive
 Fluid
PETRO CANADA TRAXON 80W90 (--- GAL)

DIAGNOSIS

▲ Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

▲ Wear

The iron level has decreased, but is still abnormal. Gear wear is indicated. All other component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0123724	PCA0118536	---
Sample Date	Client Info		21 May 2024	12 Feb 2024	---
Machine Age	hrs	Client Info	41847	41038	---
Oil Age	hrs	Client Info	1173	364	---
Oil Changed	Client Info		Not Chngd	Not Chngd	---
Sample Status			ABNORMAL	ABNORMAL	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >500	▲ 642	▲ 730	---
Chromium	ppm	ASTM D5185m >10	1	1	---
Nickel	ppm	ASTM D5185m >10	0	<1	---
Titanium	ppm	ASTM D5185m	0	<1	---
Silver	ppm	ASTM D5185m	0	0	---
Aluminum	ppm	ASTM D5185m >25	2	1	---
Lead	ppm	ASTM D5185m >25	0	1	---
Copper	ppm	ASTM D5185m >50	22	23	---
Tin	ppm	ASTM D5185m >10	<1	<1	---
Vanadium	ppm	ASTM D5185m	0	0	---
Cadmium	ppm	ASTM D5185m	0	0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 243	170	173	---
Barium	ppm	ASTM D5185m 1	0	3	---
Molybdenum	ppm	ASTM D5185m	1	2	---
Manganese	ppm	ASTM D5185m	5	5	---
Magnesium	ppm	ASTM D5185m 2	12	11	---
Calcium	ppm	ASTM D5185m 6	633	697	---
Phosphorus	ppm	ASTM D5185m 987	917	907	---
Zinc	ppm	ASTM D5185m 1	316	323	---
Sulfur	ppm	ASTM D5185m 21530	17859	17804	---




CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >75	31	32	---
Sodium	ppm	ASTM D5185m	<1	0	---
Potassium	ppm	ASTM D5185m >20	0	2	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 1.9	0.44	1.05	---

OIL ANALYSIS REPORT

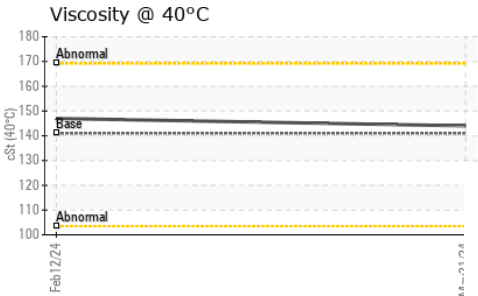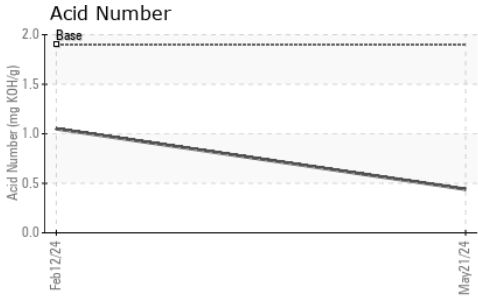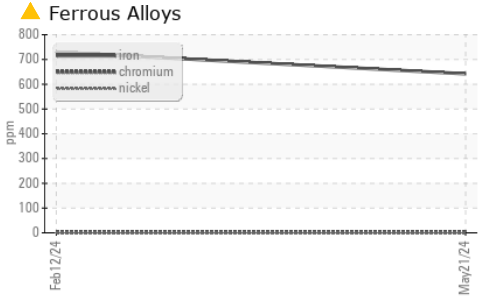








VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	141.0	144	147

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image	no image
Bottom				no image	no image	no image

GRAPHS

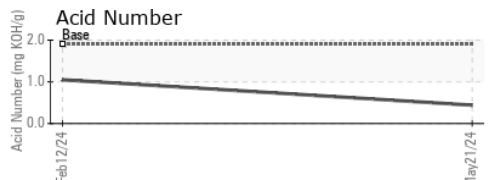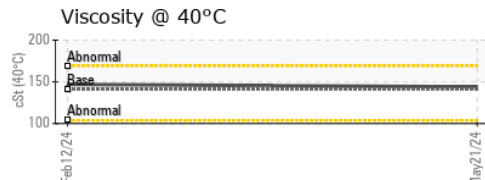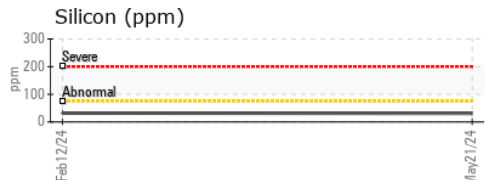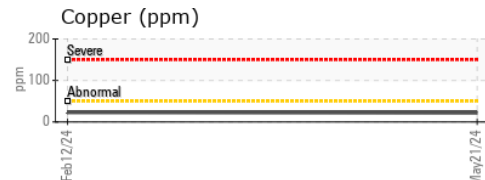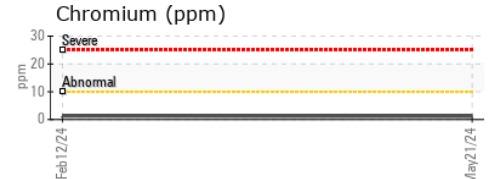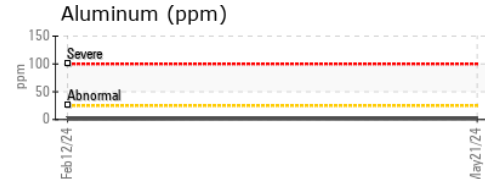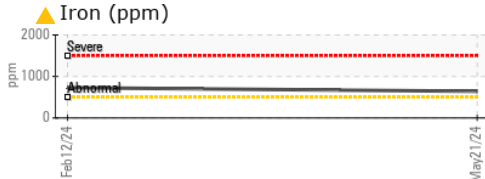

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0123724
Lab Number : 06197870
Unique Number : 11059993
Test Package : MOB 2

Received : 03 Jun 2024
Tested : 04 Jun 2024
Diagnosed : 04 Jun 2024 - Don Baldrige

SCRAP METAL SERVICES (SMS Mill Services LLC)
 1500 COMMERCIAL AVE
 MINGO JUNCTION, OH
 US 43938

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact: FRANK NALLY
 fnally@scrapmetalservices.com

T:
 F: