




# OIL ANALYSIS REPORT

Sample Rating Trend

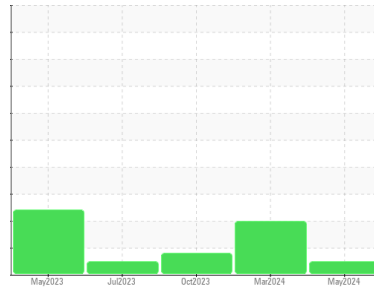

**NORMAL**



Machine Id  
**420092**  
 Component  
**Transmission (Auto)**  
 Fluid  
**ATF VI (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. ( Customer Sample Comment: Transmissiin )

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the fluid.

### Fluid Condition

The condition of the fluid is acceptable for the time in service.

## SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1    | history2    |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info |             | <b>GFL0123605</b>  | GFL0112093  | GFL0094081  |
| Sample Date   | Client Info |             | <b>29 May 2024</b> | 18 Mar 2024 | 19 Oct 2023 |
| Machine Age   | mls         | Client Info | <b>151032</b>      | 150271      | 132355      |
| Oil Age       | mls         | Client Info | <b>151032</b>      | 150271      | 132355      |
| Oil Changed   | Client Info |             | <b>Changed</b>     | Changed     | N/A         |
| Sample Status |             |             | <b>NORMAL</b>      | ABNORMAL    | ABNORMAL    |

## CONTAMINATION

|       | method    | limit/base | current    | history1 | history2 |
|-------|-----------|------------|------------|----------|----------|
| Water | WC Method | >0.1       | <b>NEG</b> | NEG      | NEG      |

## WEAR METALS

|          | method | limit/base       | current   | history1 | history2 |
|----------|--------|------------------|-----------|----------|----------|
| Iron     | ppm    | ASTM D5185m >220 | <b>5</b>  | 4        | 10       |
| Chromium | ppm    | ASTM D5185m >2   | <b>0</b>  | 0        | <1       |
| Nickel   | ppm    | ASTM D5185m >5   | <b>0</b>  | 0        | <1       |
| Titanium | ppm    | ASTM D5185m      | <b>0</b>  | 0        | <1       |
| Silver   | ppm    | ASTM D5185m >5   | <b>0</b>  | 0        | 0        |
| Aluminum | ppm    | ASTM D5185m >75  | <b>2</b>  | 1        | 1        |
| Lead     | ppm    | ASTM D5185m >95  | <b>0</b>  | <1       | 0        |
| Copper   | ppm    | ASTM D5185m >60  | <b>39</b> | ▲ 136    | ▲ 249    |
| Tin      | ppm    | ASTM D5185m >10  | <b>0</b>  | 0        | <1       |
| Vanadium | ppm    | ASTM D5185m      | <b>0</b>  | 0        | 0        |
| Cadmium  | ppm    | ASTM D5185m      | <b>0</b>  | 0        | <1       |

## ADDITIVES

|            | method | limit/base  | current     | history1 | history2 |
|------------|--------|-------------|-------------|----------|----------|
| Boron      | ppm    | ASTM D5185m | <b>0</b>    | 2        | 1        |
| Barium     | ppm    | ASTM D5185m | <b>0</b>    | 0        | 0        |
| Molybdenum | ppm    | ASTM D5185m | <b>3</b>    | 2        | 2        |
| Manganese  | ppm    | ASTM D5185m | <b>1</b>    | 2        | 2        |
| Magnesium  | ppm    | ASTM D5185m | <b>6</b>    | 6        | 16       |
| Calcium    | ppm    | ASTM D5185m | <b>2922</b> | 3076     | 2637     |
| Phosphorus | ppm    | ASTM D5185m | <b>939</b>  | 975      | 872      |
| Zinc       | ppm    | ASTM D5185m | <b>1117</b> | 1197     | 1034     |
| Sulfur     | ppm    | ASTM D5185m | <b>3959</b> | 4212     | 4035     |

## CONTAMINANTS


|           | method | limit/base      | current   | history1 | history2 |
|-----------|--------|-----------------|-----------|----------|----------|
| Silicon   | ppm    | ASTM D5185m >25 | <b>11</b> | 14       | 18       |
| Sodium    | ppm    | ASTM D5185m     | <b>5</b>  | 4        | 0        |
| Potassium | ppm    | ASTM D5185m >20 | <b>0</b>  | 0        | 2        |

## VISUAL

|                  | method | limit/base    | current      | history1 | history2 |
|------------------|--------|---------------|--------------|----------|----------|
| White Metal      | scalar | *Visual NONE  | <b>NONE</b>  | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual NONE  | <b>NONE</b>  | ▲ MODER  | NONE     |
| Precipitate      | scalar | *Visual NONE  | <b>NONE</b>  | NONE     | NONE     |
| Silt             | scalar | *Visual NONE  | <b>NONE</b>  | NONE     | NONE     |
| Debris           | scalar | *Visual NONE  | <b>NONE</b>  | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual NONE  | <b>NONE</b>  | NONE     | NONE     |
| Appearance       | scalar | *Visual NORML | <b>NORML</b> | NORML    | NORML    |
| Odor             | scalar | *Visual NORML | <b>NORML</b> | NORML    | NORML    |
| Emulsified Water | scalar | *Visual >0.1  | <b>NEG</b>   | NEG      | NEG      |
| Free Water       | scalar | *Visual       | <b>NEG</b>   | NEG      | NEG      |






# OIL ANALYSIS REPORT

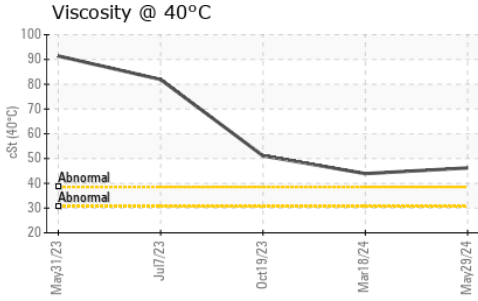

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 40°C      | cSt    | ASTM D445  | 46.2    | 43.9     | 51.1     |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
| Color         |        |            |         | no image | no image |
| Bottom        |        |            |         | no image | no image |

## GRAPHS

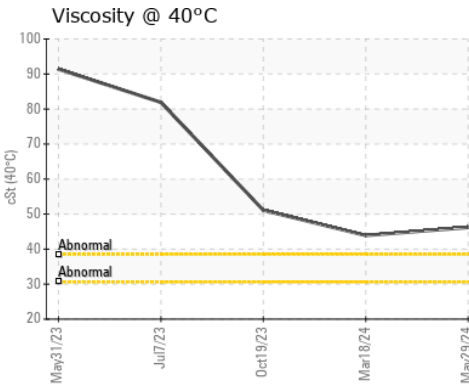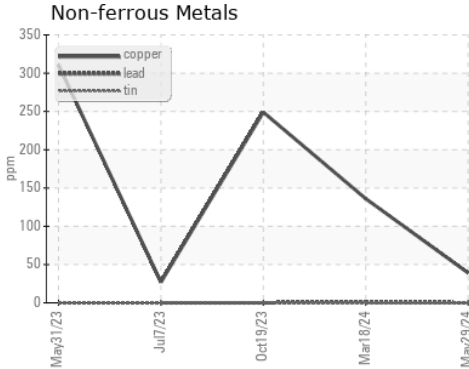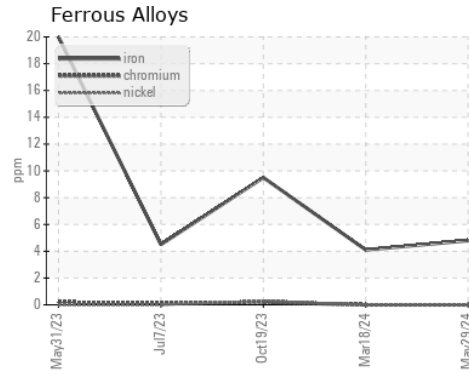

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0123605  
**Lab Number** : 06198068  
**Unique Number** : 11060191  
**Test Package** : FLEET

**Received** : 03 Jun 2024  
**Tested** : 04 Jun 2024  
**Diagnosed** : 05 Jun 2024 - Don Baldrige

**GFL Environmental - 983 - Sugar Land Hauling**  
 16011 West Belfort Street  
 Sugar Land, TX  
 US 77498  
 Contact: TECHNICIAN ACCOUNT  
 wcgfldemo@gmail.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: