


# OIL ANALYSIS REPORT

Area  
**ALBERT LEA**  
 Machine Id  
**Unit 04 DB010104E**  
 Component  
**Natural Gas Engine**  
 Fluid  
**PETRO CANADA DURON MONOGRADE HD 40W (350 GAL)**

### Sample Rating Trend

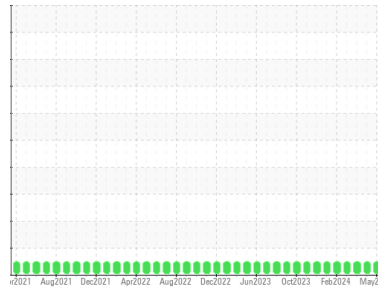

**NORMAL**



## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor. ( Customer Sample Comment: 11 gallons of lube oil added this month. )

### Wear

All component wear rates are normal.

### Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0106496</b>	PCA0106494	PCA0106493
Sample Date	Client Info			<b>29 May 2024</b>	29 Apr 2024	10 Apr 2024
Machine Age	hrs	Client Info		<b>15518</b>	15503	15460
Oil Age	hrs	Client Info		<b>15518</b>	15503	15460
Oil Changed	Client Info			<b>Oil Added</b>	Not Changd	Oil Added
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.1	<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<b>5</b>	4	4
Chromium	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	0
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>3	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m	>9	<b>2</b>	<1	<1
Lead	ppm	ASTM D5185m	>30	<b>&lt;1</b>	0	<1
Copper	ppm	ASTM D5185m	>35	<b>1</b>	<1	1
Tin	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	<1
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>1</b>	<1	1
Manganese	ppm	ASTM D5185m		<b>0</b>	0	0
Magnesium	ppm	ASTM D5185m		<b>867</b>	982	882
Calcium	ppm	ASTM D5185m		<b>990</b>	1098	1017
Phosphorus	ppm	ASTM D5185m		<b>1110</b>	1239	1097
Zinc	ppm	ASTM D5185m		<b>1286</b>	1413	1161
Sulfur	ppm	ASTM D5185m		<b>3388</b>	3947	3413


CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>+100	<b>5</b>	2	2
Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	1
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	0
Fuel	%	ASTM D3524	>4.0	<b>1.1</b>	1.1	1.1

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844		<b>0.1</b>	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	<b>3.8</b>	4.1	3.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>13.0</b>	13.5	13.2


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>6.7</b>	7.2	6.8
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>1.71</b>	1.65	1.61
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>8.29</b>	7.98	8.14

# OIL ANALYSIS REPORT


## Fuel Dilution

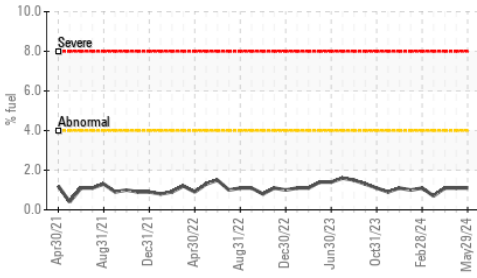


## FT-IR (Direct Trend)

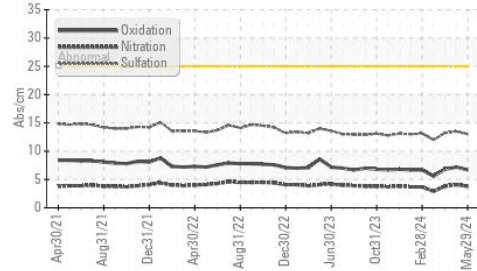


## Acid Number

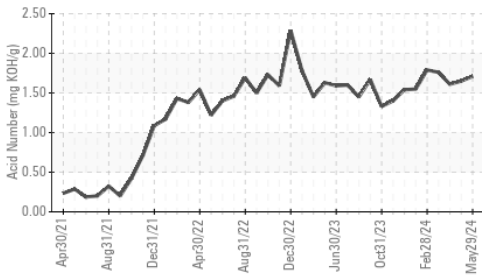

## Base Number

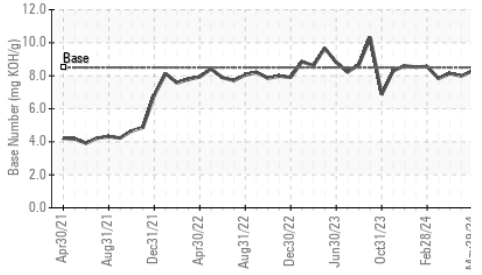

## Viscosity @ 100°C

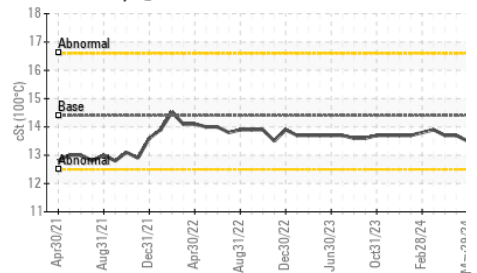


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>LIGHT</b>	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG
Free Water	scalar	*Visual		<b>NEG</b>	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	<b>13.5</b>	13.7

## GRAPHS


### Iron (ppm)

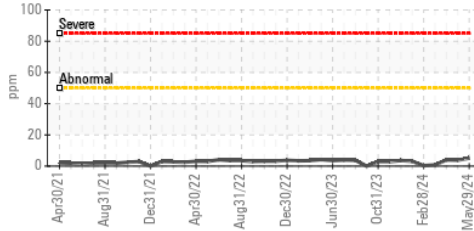


### Aluminum (ppm)

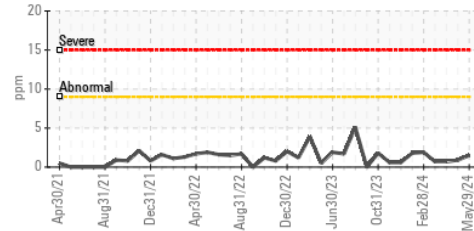


### Copper (ppm)

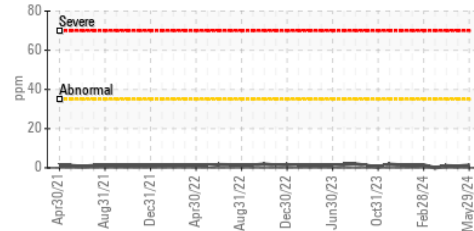


### Viscosity @ 100°C

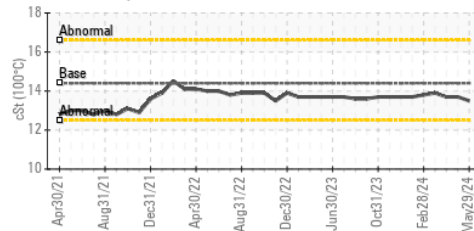


### Lead (ppm)

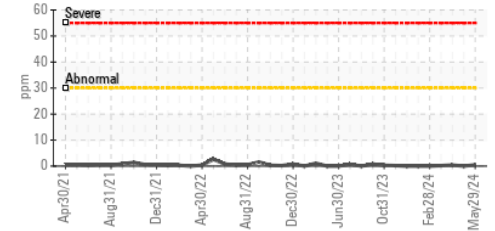


### Chromium (ppm)

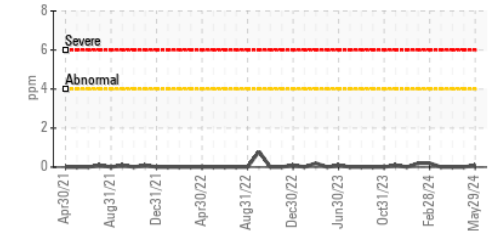

### Silicon (ppm)

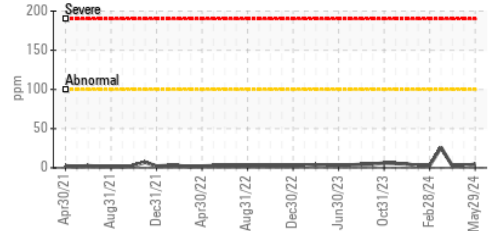

### Base Number

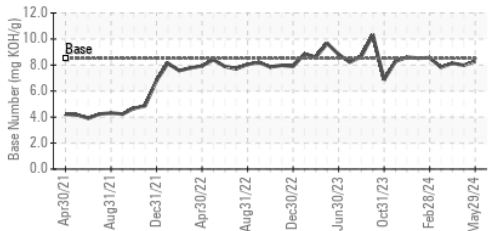

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : PCA0106496

**Lab Number** : 06198329

**Unique Number** : 11060452

**Test Package** : MOB 2 ( Additional Tests: FuelDilution, PercentFuel )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**Received** : 03 Jun 2024

**Tested** : 05 Jun 2024

**Diagnosed** : 05 Jun 2024 - Sean Felton

**Magellan Midstream LP - Albert Lea**

11406 755th Avenue

Glenville, MN

US 56036

Contact: Shawn Duren

shawn.duren@magellanlp.com

T: (641)231-6666

F: