

Area (68518Z) Walgreens - Tractor [Walgreens - Tractor] 136A624175

Diesel Engine Fluid

PETRO CANADA DURON SHP 10W30 (11 GAL)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

Metal levels are typical for a components first oil change.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. No other contaminants were detected in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.






SAMPLE INFORI	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0111096		
Sample Date		Client Info		09 May 2024		
Machine Age	mls	Client Info		52992		
Oil Age	mls	Client Info		52992		
Oil Changed		Client Info		Changed		
Sample Status				NORMAL		
CONTAMINAT	ION	method	limit/base	current	history1	history2
Fuel		WC Method	>5	<1.0		
Water		WC Method	>0.2	NEG		
Glycol		WC Method		NEG		
WEAR METAL	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>80	70		
Chromium	ppm	ASTM D5185m	>5	5		
Nickel	ppm	ASTM D5185m	>2	<1		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m	>3	0		
Aluminum	ppm	ASTM D5185m	>30	82		
Lead	ppm	ASTM D5185m	>30	0		
Copper	ppm	ASTM D5185m	>150	105		
Tin	ppm	ASTM D5185m	>5	8		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
Oddinidini	ppm			0		
ADDITIVES	ppm	method	limit/base	current	history1	history2
	ppm		limit/base	-	history1	
ADDITIVES		method		current		history2
ADDITIVES Boron	ppm	method ASTM D5185m	2	current 25		history2
ADDITIVES Boron Barium	ppm ppm	method ASTM D5185m ASTM D5185m	2 0	current 25 0		history2
ADDITIVES Boron Barium Molybdenum	ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m	2 0 50	current 25 0 44		history2
ADDITIVES Boron Barium Molybdenum Manganese	ppm ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	2 0 50 0	current 25 0 44 4		history2
ADDITIVES Boron Barium Molybdenum Manganese Magnesium	ppm ppm ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	2 0 50 0 950	current 25 0 44 4 579		history2
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium	ppm ppm ppm ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	2 0 50 0 950 1050	current 25 0 44 4 579 1701	 	history2
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus	ppm ppm ppm ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	2 0 50 0 950 1050 995	current 25 0 44 4 579 1701 748	 	history2
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc	ppm ppm ppm ppm ppm ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	2 0 50 950 1050 995 1180	current 25 0 44 4 579 1701 748 922	 	history2
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur	ppm ppm ppm ppm ppm ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	2 0 50 0 950 1050 995 1180 2600	Current 25 0 44 4 579 1701 748 922 1798		history2
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN	ppm ppm ppm ppm ppm ppm ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	2 0 50 950 1050 995 1180 2600	current 25 0 44 579 1701 748 922 1798 current	 history1	history2 history2
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Sillicon	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	2 0 50 0 950 1050 995 1180 2600 limit/base	current 25 0 44 579 1701 748 922 1798 current 9	 history1	history2 history2
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	method ASTM D5185m	2 0 50 0 950 1050 995 1180 2600 limit/base	current 25 0 44 4 579 1701 748 922 1798 current 9 5	 history1	history2
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	method ASTM D5185m	2 0 50 950 1050 995 1180 2600 limit/base >20	current 25 0 44 579 1701 748 922 1798 current 9 5 220	 history1 	history2 history2
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	method ASTM D5185m	2 0 50 0 950 1050 995 1180 2600 Imit/base >20 \$20	current 25 0 44 4 579 1701 748 922 1798 current 9 5 220 current	 history1 history1	history2 history2 history2 history2
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot %	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	method ASTM D5185m	2 0 50 0 950 1050 995 1180 2600 limit/base >20 20 limit/base >20	current 25 0 44 4 579 1701 748 922 1798 current 9 5 220 current 1.1	 history1 history1 history1	history2 history2 history2 history2 history2
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot % Nitration	ppm ppm ppm ppm ppm ppm ppm ppm ppm t t t t	method ASTM D5185m ASTM D5185m	2 0 50 950 1050 995 1180 2600 <i>imit/base</i> >20 <i>imit/base</i> >20	current 25 0 44 4 579 1701 748 922 1798 current 9 5 220 current 1.1 12.2	 history1 history1 	history2 history2 history2 history2 history2
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot % Nitration Sulfation	ppm ppm ppm ppm ppm ppm ppm ppm ppm t t t t	method ASTM D5185m ASTM D5185m	2 0 50 950 1050 995 1180 2600 imit/base >20 imit/base >3 >20 >30	current 25 0 44 4 579 1701 748 922 1798 current 9 5 220 current 1.1 12.2 24.8	 history1 history1 history1	history2 history2 history2



OIL ANALYSIS REPORT

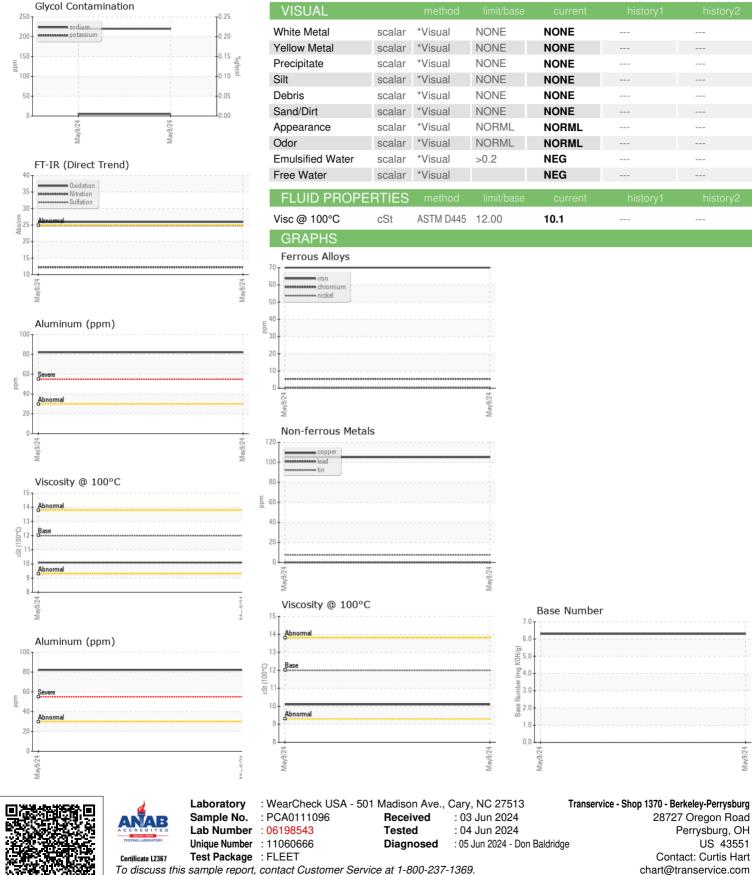

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: TSV1370 [WUSCAR] 06198543 (Generated: 06/05/2024 21:12:14) Rev: 1

٦Ē

Submitted By: Curtis Hart

Perrysburg, OH

Contact: Curtis Hart

T: (419)666-3277

F: (419)666-3279

US 43551