


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

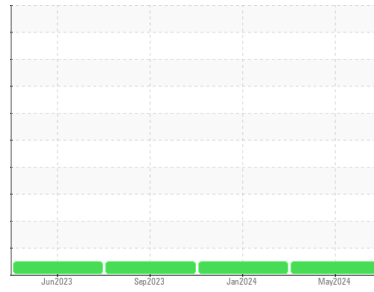

Area  
**(AU702W) Supermarket - Tractor**  
 Machine Id  
**FREIGHTLINER 107A1886**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0124726</b>	PCA0116473	PCA0104807
Sample Date	Client Info			<b>30 May 2024</b>	18 Jan 2024	28 Sep 2023
Machine Age	mls Client Info			<b>301939</b>	284613	269827
Oil Age	mls Client Info			<b>17326</b>	14786	17049
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>80	<b>8</b>	10	7
Chromium	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>30	<b>6</b>	4	6
Lead	ppm	ASTM D5185m	>30	<b>0</b>	0	<1
Copper	ppm	ASTM D5185m	>150	<b>1</b>	2	2
Tin	ppm	ASTM D5185m	>5	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	<b>1</b>	2	4
Barium	ppm	ASTM D5185m	0	<b>0</b>	5	0
Molybdenum	ppm	ASTM D5185m	50	<b>61</b>	59	59
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m	950	<b>963</b>	914	948
Calcium	ppm	ASTM D5185m	1050	<b>1063</b>	1062	1089
Phosphorus	ppm	ASTM D5185m	995	<b>1048</b>	1022	1056
Zinc	ppm	ASTM D5185m	1180	<b>1244</b>	1172	1299
Sulfur	ppm	ASTM D5185m	2600	<b>3069</b>	3128	3070

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	<b>4</b>	3	4
Sodium	ppm	ASTM D5185m		<b>6</b>	0	2
Potassium	ppm	ASTM D5185m	>20	<b>9</b>	4	4

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.7</b>	0.6	0.7
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.3</b>	7.6	7.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.9</b>	19.1	19.4

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>15.3</b>	14.8	15.0
Base Number (BN)	mg KOH/g	ASTM D2896		<b>8.5</b>	8.5	8.4





# OIL ANALYSIS REPORT

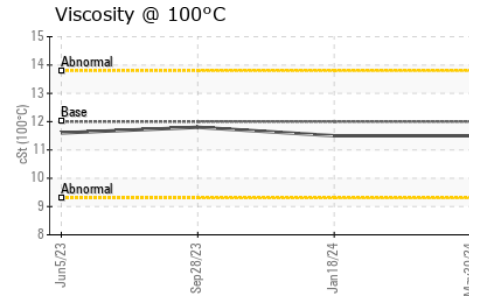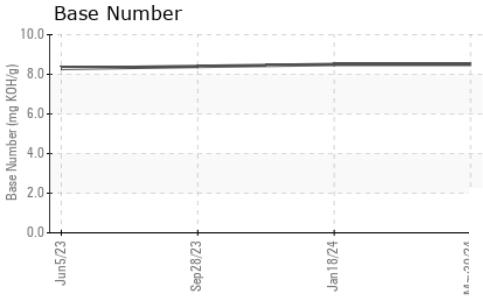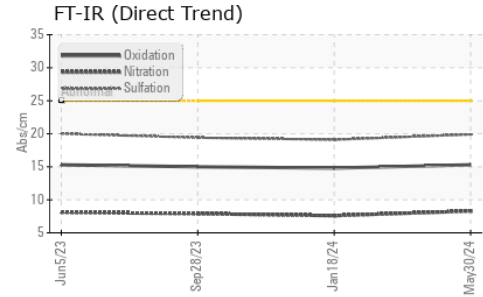

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	<b>11.5</b>	11.5

## GRAPHS

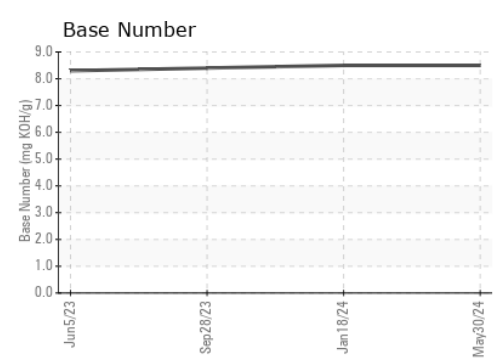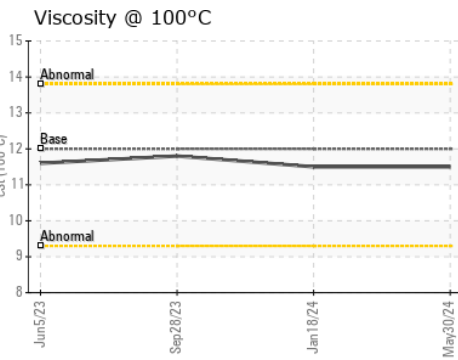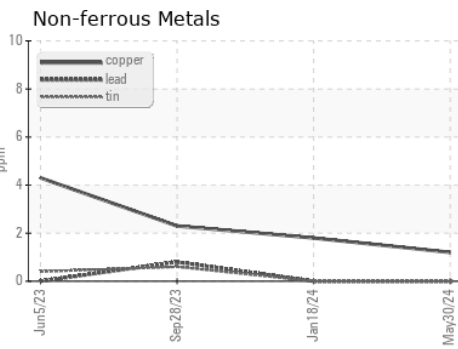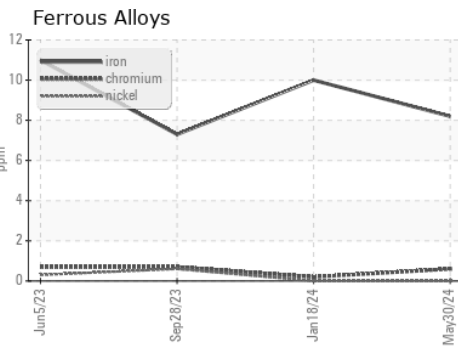

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0124726      **Received** : 03 Jun 2024  
**Lab Number** : **06198569**      **Tested** : 04 Jun 2024  
**Unique Number** : 11060692      **Diagnosed** : 04 Jun 2024 - Wes Davis  
**Test Package** : FLEET

**Transervice - Shop 1072 - Supermarket-Elizabeth**  
 505 Division Street  
 Elizabeth, NJ  
 US 07207  
 Contact: Normand Brizak  
 nbrizak@transervice.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)