




OIL ANALYSIS REPORT



Machine Id
427081-402333
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (8 GAL)

Sample Rating Trend

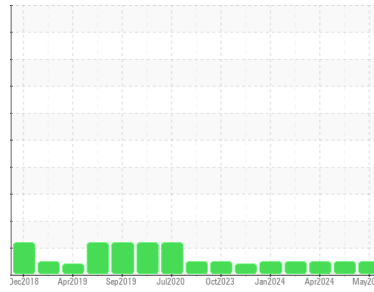

NORMAL

DIAGNOSIS

Recommendation
 Resample at the next service interval to monitor.

Wear
 All component wear rates are normal.

Contamination
 There is no indication of any contamination in the oil.

Fluid Condition
 The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0112253	GFL0065432	GFL0112230
Sample Date	Client Info	31 May 2024	06 May 2024	05 Apr 2024
Machine Age	hrs	1289	1134	990
Oil Age	hrs	150	150	150
Oil Changed	Client Info	Not Changed	Not Changed	Not Changed
Sample Status		NORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<1.0	<1.0	<1.0
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >120	13	11	7
Chromium	ppm ASTM D5185m >20	0	<1	<1
Nickel	ppm ASTM D5185m >5	3	3	2
Titanium	ppm ASTM D5185m >2	0	<1	<1
Silver	ppm ASTM D5185m >2	0	0	0
Aluminum	ppm ASTM D5185m >20	3	4	3
Lead	ppm ASTM D5185m >40	0	2	1
Copper	ppm ASTM D5185m >330	3	2	2
Tin	ppm ASTM D5185m >15	1	2	2
Vanadium	ppm ASTM D5185m	0	<1	<1
Cadmium	ppm ASTM D5185m	0	<1	<1

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	0	<1	0
Barium	ppm ASTM D5185m 0	0	0	0
Molybdenum	ppm ASTM D5185m 60	54	56	58
Manganese	ppm ASTM D5185m 0	<1	1	<1
Magnesium	ppm ASTM D5185m 1010	894	884	978
Calcium	ppm ASTM D5185m 1070	1034	997	1117
Phosphorus	ppm ASTM D5185m 1150	1007	957	1056
Zinc	ppm ASTM D5185m 1270	1176	1147	1281
Sulfur	ppm ASTM D5185m 2060	3207	2978	3481

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	4	11	8
Sodium	ppm ASTM D5185m	4	2	4
Potassium	ppm ASTM D5185m >20	<1	3	2

INFRA-RED




method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >4	0.6	0.4	0.3
Nitration	Abs/cm *ASTM D7624 >20	8.6	7.1	6.0
Sulfation	Abs/.1mm *ASTM D7415 >30	20.4	18.8	18.5

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	15.8	14.4	14.1
Base Number (BN)	mg KOH/g ASTM D2896 9.8	7.1	7.8	8.3







OIL ANALYSIS REPORT

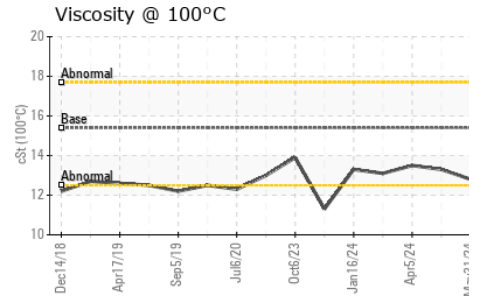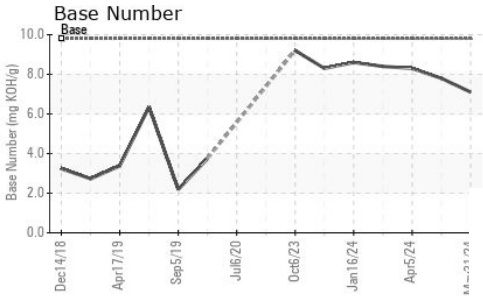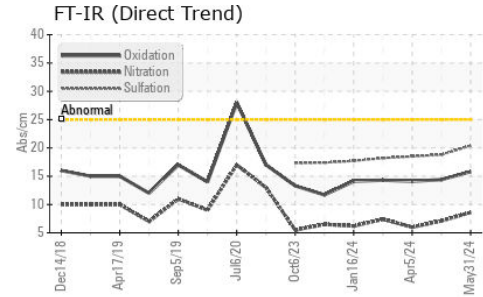

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	12.8	13.3

GRAPHS

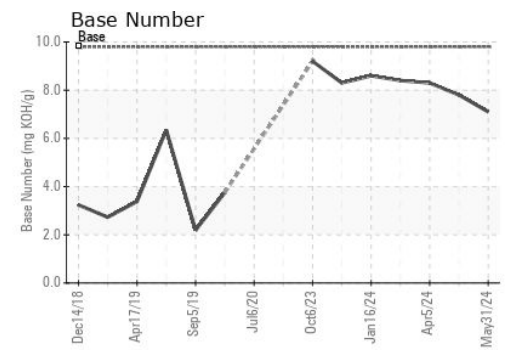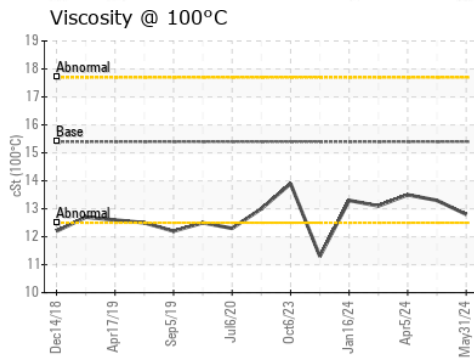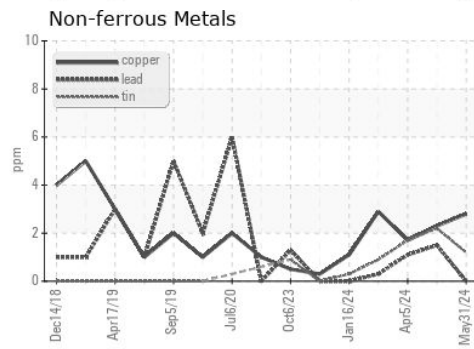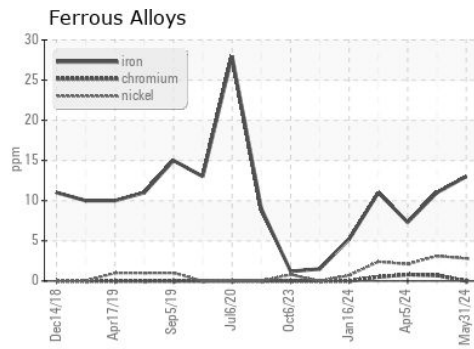

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0112253 **Received** : 04 Jun 2024
Lab Number : 06198778 **Tested** : 07 Jun 2024
Unique Number : 11060901 **Diagnosed** : 07 Jun 2024 - Wes Davis
Test Package : FLEET

GFL Environmental - 829 - Wilco Hauling
 5054 Highway HH
 Hartville, MO
 US 65667
 Contact: James Jones
 james.jones@gflenv.com
 T: (417)349-5006
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)