




# OIL ANALYSIS REPORT

## Sample Rating Trend

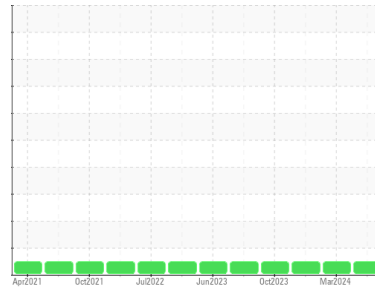

**NORMAL**



Machine Id  
**429023-1256**

Component  
**Diesel Engine**

Fluid  
**CHEVRON DELO 400 XLE 15W40 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0104709</b>	GFL0104597	GFL0096279
Sample Date	Client Info		<b>30 May 2024</b>	06 Mar 2024	30 Dec 2023
Machine Age	hrs	Client Info	<b>11877</b>	11264	10908
Oil Age	hrs	Client Info	<b>0</b>	226345	600
Oil Changed	Client Info		<b>Not Changed</b>	N/A	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

### CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>2.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>17</b>	3	13
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >4	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m	<b>5</b>	10	6
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	2	3
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	0	2
Copper	ppm	ASTM D5185m >330	<b>&lt;1</b>	0	<1
Tin	ppm	ASTM D5185m >15	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>265</b>	153	195
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>88</b>	54	88
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	<b>647</b>	679	746
Calcium	ppm	ASTM D5185m	<b>1588</b>	1506	1597
Phosphorus	ppm	ASTM D5185m 760	<b>770</b>	737	811
Zinc	ppm	ASTM D5185m 830	<b>877</b>	833	966
Sulfur	ppm	ASTM D5185m 2770	<b>3147</b>	3328	3037

### CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>0</b>	4	6
Sodium	ppm	ASTM D5185m	<b>10</b>	3	4
Potassium	ppm	ASTM D5185m >20	<b>3</b>	2	2

### INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.3</b>	0.3	0.4
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.1</b>	9.6	10.2
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.8</b>	19.7	22.5


### FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>15.0</b>	14.9	17.1
Base Number (BN)	mg KOH/g	ASTM D2896 10.7	<b>6.2</b>	6.9	7.0




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

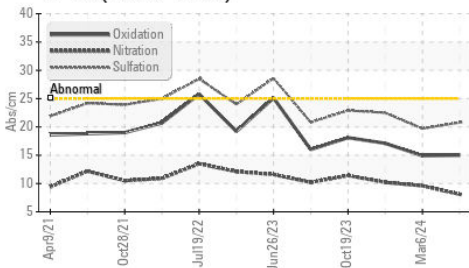

Base Number

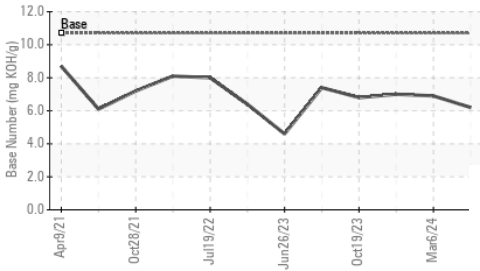

Viscosity @ 100°C

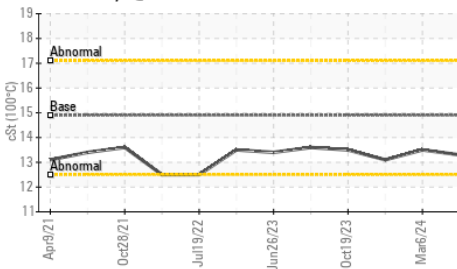


PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.9	13.3	13.5

## GRAPHS


Ferrous Alloys

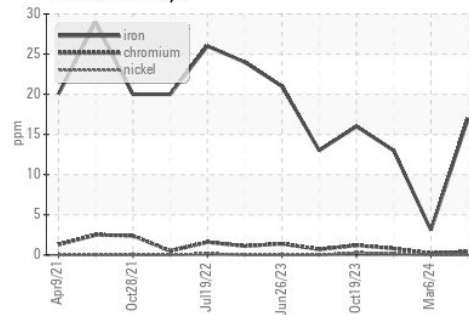


Non-ferrous Metals

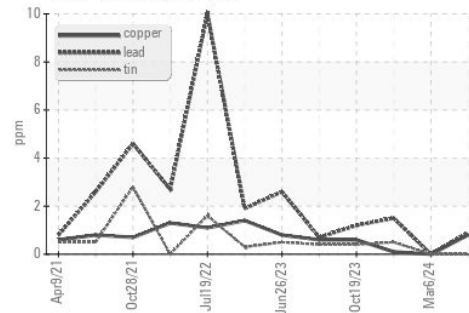

Viscosity @ 100°C

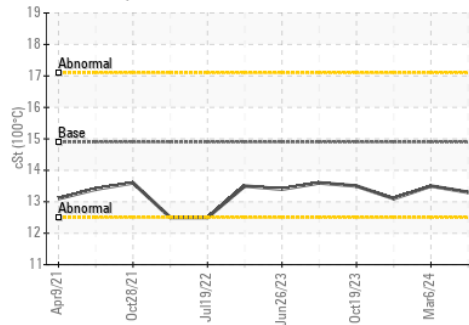

Base Number

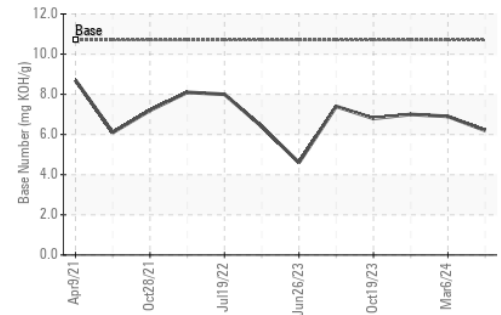

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0104709  
 Lab Number : 06198794  
 Unique Number : 11060917  
 Test Package : FLEET

Received : 04 Jun 2024  
 Tested : 05 Jun 2024  
 Diagnosed : 05 Jun 2024 - Wes Davis

GFL Environmental - 624 - Elmira Hauling  
 10164 M-32  
 Elmira, MI  
 US 49730

Contact: ANDY GROBASKI  
 andyg@americanwaste.org  
 T: (989)370-2941

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)