




OIL ANALYSIS REPORT

Sample Rating Trend

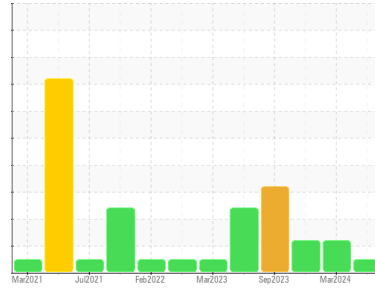

NORMAL



Machine Id
728019-1146

Component
Diesel Engine

Fluid
CHEVRON DELO 400 XLE 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0104707	GFL0104603	GFL0096260
Sample Date	Client Info		30 May 2024	08 Mar 2024	27 Nov 2023
Machine Age	hrs	Client Info	4176	16195	4176
Oil Age	hrs	Client Info	0	0	482
Oil Changed	Client Info		Not Changed	Not Changd	Not Changed
Sample Status			NORMAL	ATTENTION	ATTENTION

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >80	31	71	41
Chromium	ppm	ASTM D5185m >5	<1	2	<1
Nickel	ppm	ASTM D5185m >2	0	<1	0
Titanium	ppm	ASTM D5185m	5	6	5
Silver	ppm	ASTM D5185m >3	0	0	0
Aluminum	ppm	ASTM D5185m >30	9	22	13
Lead	ppm	ASTM D5185m >30	0	0	0
Copper	ppm	ASTM D5185m >150	2	6	6
Tin	ppm	ASTM D5185m >5	0	<1	0
Vanadium	ppm	ASTM D5185m	<1	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	181	90	129
Barium	ppm	ASTM D5185m	0	0	2
Molybdenum	ppm	ASTM D5185m	66	80	88
Manganese	ppm	ASTM D5185m	<1	1	0
Magnesium	ppm	ASTM D5185m	512	644	582
Calcium	ppm	ASTM D5185m	1523	1602	1470
Phosphorus	ppm	ASTM D5185m 760	873	801	657
Zinc	ppm	ASTM D5185m 830	1006	930	787
Sulfur	ppm	ASTM D5185m 2770	3421	3209	2818

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	3	12	14
Sodium	ppm	ASTM D5185m	22	108	138
Potassium	ppm	ASTM D5185m >20	9	35	35

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.6	1	0.7
Nitration	Abs/cm	*ASTM D7624 >20	10.8	15.3	12.1
Sulfation	Abs/.1mm	*ASTM D7415 >30	22.5	27.4	23.7


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	19.6	27.0	20.6
Base Number (BN)	mg KOH/g	ASTM D2896 10.7	6.6	6.3	7.5




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

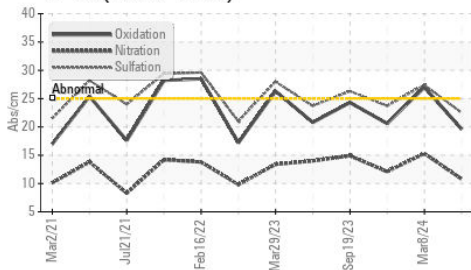

Base Number

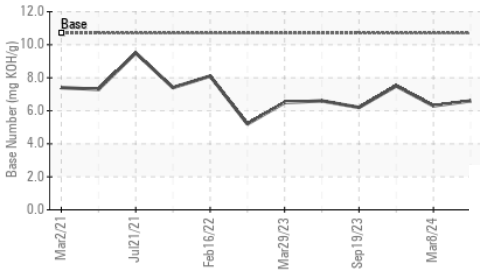

Viscosity @ 100°C

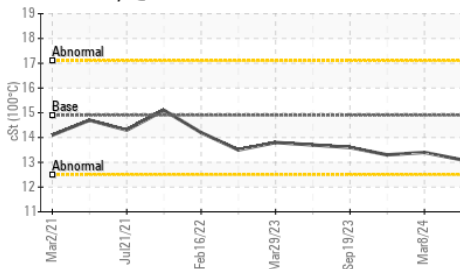


PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.9	13.1	13.4

GRAPHS


Ferrous Alloys

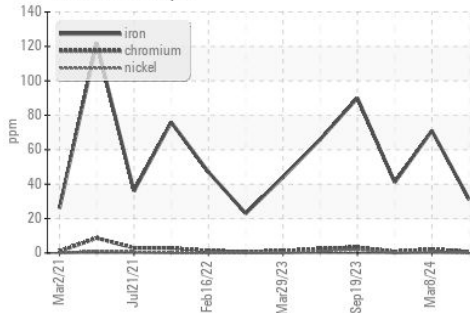


Non-ferrous Metals

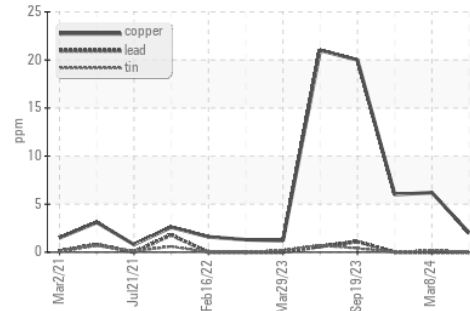

Viscosity @ 100°C

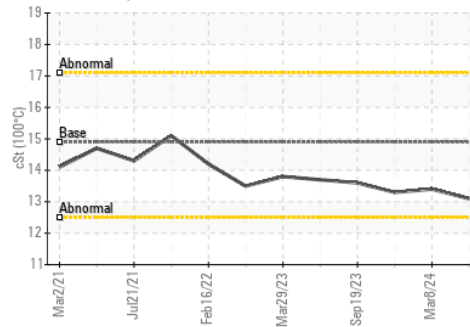

Base Number

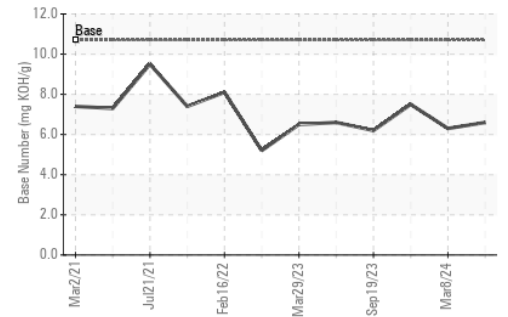

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : GFL0104707
 Lab Number : 06198795
 Unique Number : 11060918
 Test Package : FLEET

Received : 04 Jun 2024
 Tested : 05 Jun 2024
 Diagnosed : 05 Jun 2024 - Wes Davis

GFL Environmental - 624 - Elmira Hauling
 10164 M-32
 Elmira, MI
 US 49730

Contact: ANDY GROBASKI
 andyg@americanwaste.org
 T: (989)370-2941

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)