




# OIL ANALYSIS REPORT

Sample Rating Trend

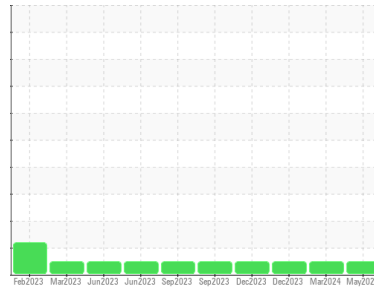

**NORMAL**



Machine Id

**429103**

Component

**Diesel Engine**

Fluid

**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0086970</b>	GFL0086908	GFL0086926
Sample Date	Client Info		<b>31 May 2024</b>	08 Mar 2024	18 Dec 2023
Machine Age	hrs	Client Info	<b>6300</b>	5825	5825
Oil Age	hrs	Client Info	<b>475</b>	600	600
Oil Changed	Client Info		<b>Not Chngd</b>	Not Chngd	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>12</b>	7	14
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	1
Nickel	ppm	ASTM D5185m >4	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	2	4
Lead	ppm	ASTM D5185m >40	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m >330	<b>&lt;1</b>	0	1
Tin	ppm	ASTM D5185m >15	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>0</b>	4	5
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	<1
Molybdenum	ppm	ASTM D5185m 60	<b>60</b>	60	66
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m 1010	<b>902</b>	982	1005
Calcium	ppm	ASTM D5185m 1070	<b>1105</b>	1110	1142
Phosphorus	ppm	ASTM D5185m 1150	<b>1031</b>	1038	1182
Zinc	ppm	ASTM D5185m 1270	<b>1199</b>	1264	1358
Sulfur	ppm	ASTM D5185m 2060	<b>3387</b>	3729	3268

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>0</b>	3	5
Sodium	ppm	ASTM D5185m	<b>4</b>	2	5
Potassium	ppm	ASTM D5185m >20	<b>4</b>	3	10

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.6</b>	0.3	0.6
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.5</b>	7.0	8.5
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>18.8</b>	17.8	18.7


## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>14.8</b>	13.9	15.0
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>7.9</b>	8.4	8.4




# OIL ANALYSIS REPORT


### FT-IR (Direct Trend)

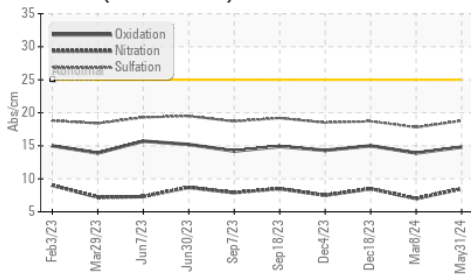

### Base Number

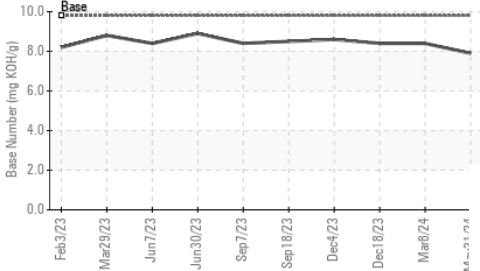

### Viscosity @ 100°C

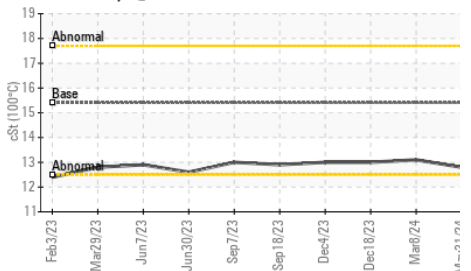


PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	12.8	13.1

### GRAPHS


#### Ferrous Alloys

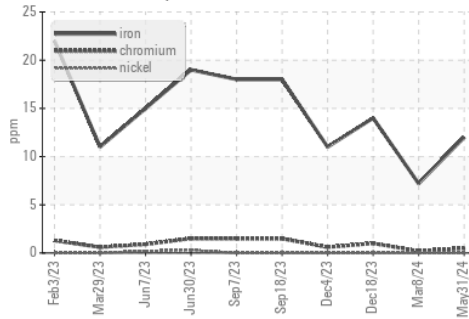


#### Non-ferrous Metals

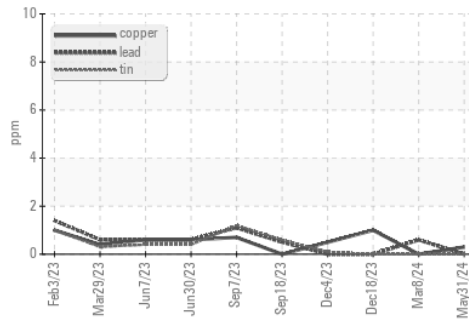

#### Viscosity @ 100°C

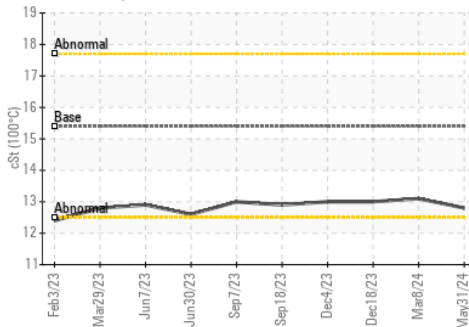

#### Base Number

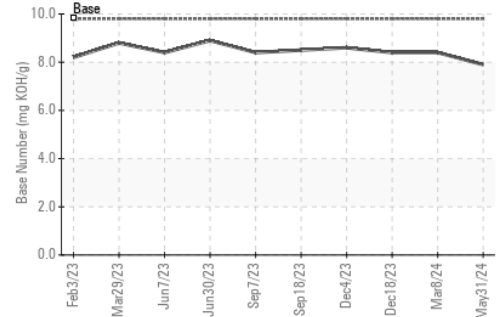

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0086970  
**Lab Number** : 06198814  
**Unique Number** : 11060937  
**Test Package** : FLEET

**Received** : 04 Jun 2024  
**Tested** : 05 Jun 2024  
**Diagnosed** : 05 Jun 2024 - Wes Davis

**GFL Environmental - 408 - Brown City**  
 4235 M-53  
 BROWN CITY, MI  
 US 48416

Contact: WILLIAM DEOLA  
 bdeola@gflenv.com  
 T: (810)238-2836

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)