


OIL ANALYSIS REPORT

MARSHALL [MARSHALL] DB100101E Unit 01

Natural Gas Engine

PETRO CANADA DURON MONOGRADE HD 40W (250 GAL)

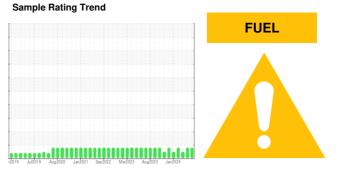

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Light fuel dilution occurring.


Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0114494	PCA0114493	PCA0114501
Sample Date		Client Info		30 May 2024	29 Apr 2024	29 Mar 2024
Machine Age	hrs	Client Info		788694	788694	788694
Oil Age	hrs	Client Info		16588	16214	16039
Oil Changed		Client Info		Filtered	N/A	Filtered
Sample Status				MARGINAL	MARGINAL	NORMAL
CONTAMINAT	ION	method	limit/base	current	history1	history2
Water		WC Method	>0.1	NEG	NEG	NEG
WEAR METAL	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	4	3	3
Chromium	ppm	ASTM D5185m	>4	0	0	0
Nickel	ppm	ASTM D5185m	>2	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>9	2	1	2
Lead	ppm	ASTM D5185m	>30	<1	<1	<1
Copper	ppm	ASTM D5185m	>35	2	1	<1
Tin	ppm	ASTM D5185m	>4	0	0	<1
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	2
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		2	2	3
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m		912	943	892
Calcium	ppm	ASTM D5185m		1114	1168	1031
Phosphorus	ppm	ASTM D5185m		1094	1146	1129
Zinc	ppm	ASTM D5185m		1285	1338	1305
Sulfur	ppm	ASTM D5185m		3409	3693	3656
CONTAMINAN	TS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>+100	0	5	2
Sodium	ppm	ASTM D5185m		1	1	2
Potassium	ppm	ASTM D5185m	>20	2	<1	<1
Fuel	%	ASTM D3524	>4.0	<u>^</u> 2.2	<u>^</u> 2.0	1.9
INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844		0.1	0	0
Nitration	Abs/cm	*ASTM D7624	>20	4.5	4.5	4.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	13.7	15.1	13.6
FLUID DEGRAD	OATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	7.7	8.2	7.6
Acid Number (AN)	mg KOH/g	ASTM D8045		2.21	1.36	1.39
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	6.7	8.22	8.20



OIL ANALYSIS REPORT

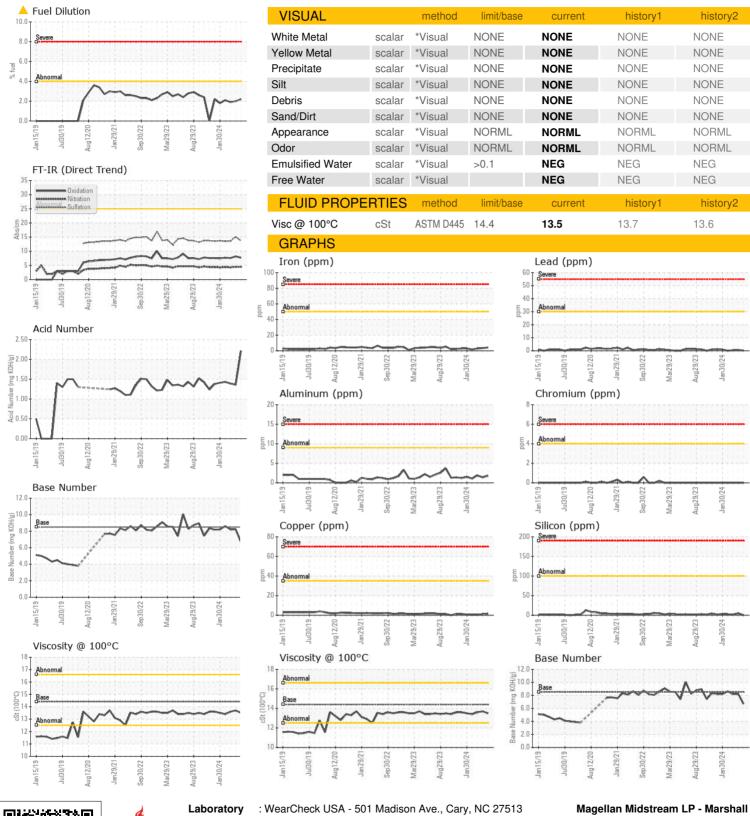





Certificate 12367

Sample No.

Lab Number : 06198836 Unique Number : 11060959

: PCA0114494 Received **Tested**

: 04 Jun 2024 : 10 Jun 2024

Diagnosed : 10 Jun 2024 - Jonathan Hester

Test Package: MOB 2 (Additional Tests: FuelDilution, PercentFuel) To discuss this sample report, contact Customer Service at 1-800-237-1369.

 st - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

1601 West College Drive Marshall, MN US 56258

Contact: Brett Erickson brett.erickson@magellanlp.com T: (519)822-1260

Submitted By: ANDREW LAUER