



# PROBLEM SUMMARY

## Sample Rating Trend


FUEL



Machine Id  
**727020-1168**


Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (15 QTS)**

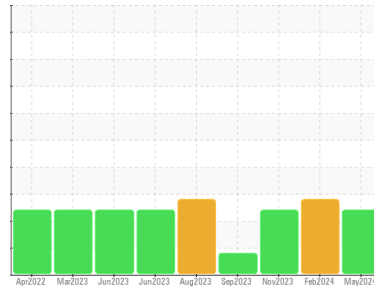


## COMPONENT CONDITION SUMMARY

### ▲ Fuel Dilution

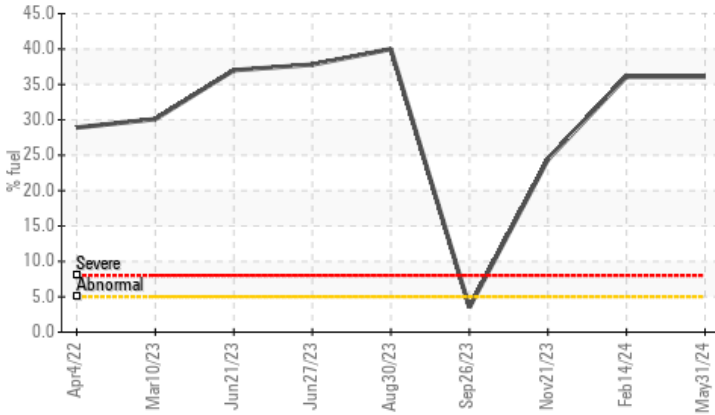

### ▲ Viscosity @ 100°C

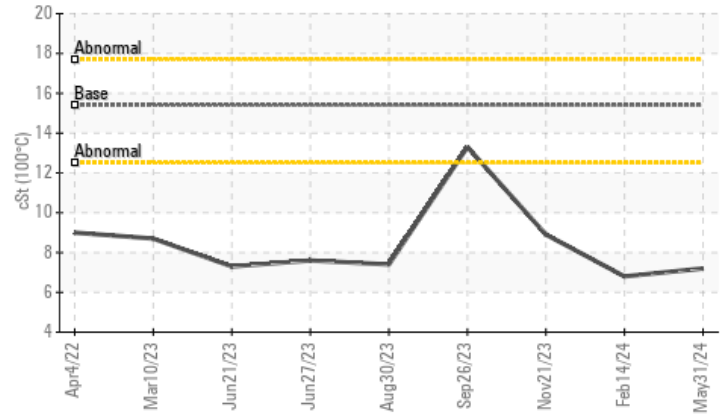

## RECOMMENDATION

We advise that you check the fuel injection system. We recommend that you drain the oil and perform a filter service on this component if not already done. We recommend an early resample to monitor this condition. ( Customer Sample Comment: Sampled oil )

## PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	SEVERE	SEVERE
Fuel	%	ASTM D3524	>5	▲ 36.1	▲ 36.1	▲ 24.4
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 7.2	▲ 6.8	▲ 8.9

Customer Id: GFL622  
 Sample No.: GFL0120866  
 Lab Number: 06198918  
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Don Baldrige +1  
[don.b505@comcast.net](mailto:don.b505@comcast.net)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	We recommend that you drain the oil and perform a filter service on this component if not already done.
Change Filter	---	---	?	We recommend that you drain the oil and perform a filter service on this component if not already done.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Fuel/injector System	---	---	?	We advise that you check the fuel injection system.

## HISTORICAL DIAGNOSIS

### 14 Feb 2024 Diag: Wes Davis

FUEL



We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition. All component wear rates are normal. There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

view report



### 21 Nov 2023 Diag: Jonathan Hester

FUEL



We advise that you check the fuel injection system. We recommend that you drain the oil and perform a filter service on this component if not already done. We recommend an early resample to monitor this condition. All component wear rates are normal. There is a high amount of fuel present in the oil. Fuel is present in the oil and is lowering the viscosity. The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

view report



### 26 Sep 2023 Diag: Jonathan Hester

FUEL



No corrective action is recommended at this time. Resample at the next service interval to monitor. All component wear rates are normal. Light fuel dilution occurring. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.


view report





# OIL ANALYSIS REPORT

Sample Rating Trend

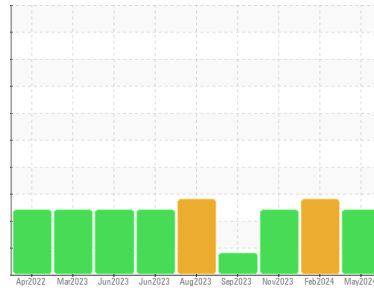

FUEL



Machine Id  
**727020-1168**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (15 QTS)**

## DIAGNOSIS

### ▲ Recommendation

We advise that you check the fuel injection system. We recommend that you drain the oil and perform a filter service on this component if not already done. We recommend an early resample to monitor this condition. ( Customer Sample Comment: Sampled oil )

### Wear

All component wear rates are normal.

### ▲ Contamination

There is a high amount of fuel present in the oil.

### ▲ Fluid Condition

Fuel is present in the oil and is lowering the viscosity. The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0120866</b>	GFL0110271	GFL0090490
Sample Date	Client Info		<b>31 May 2024</b>	14 Feb 2024	21 Nov 2023
Machine Age	mls	Client Info	<b>149058</b>	14958	149058
Oil Age	mls	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	Changed	Not Chngd
Sample Status			<b>SEVERE</b>	SEVERE	SEVERE

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>100	<b>15</b>	9	5
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>&lt;1</b>	2	2
Lead	ppm	ASTM D5185m	>40	<b>0</b>	0	<1
Copper	ppm	ASTM D5185m	>330	<b>1</b>	<1	<1
Tin	ppm	ASTM D5185m	>15	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	0	<b>0</b>	2	4
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	60	<b>38</b>	35	41
Manganese	ppm	ASTM D5185m	0	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m	1010	<b>542</b>	553	673
Calcium	ppm	ASTM D5185m	1070	<b>695</b>	586	756
Phosphorus	ppm	ASTM D5185m	1150	<b>642</b>	607	809
Zinc	ppm	ASTM D5185m	1270	<b>735</b>	717	892
Sulfur	ppm	ASTM D5185m	2060	<b>2057</b>	1737	2302

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>25	<b>0</b>	5	5
Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	2
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	<1	2
Fuel	%	ASTM D3524	>5	<b>▲ 36.1</b>	▲ 36.1	▲ 24.4

## INFRA-RED





	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>3	<b>0.7</b>	0.6	0.4
Nitration	Abs/cm	*ASTM D7624	>20	<b>10.7</b>	10.4	8.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.4</b>	18.4	18.7

## FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>17.4</b>	16.3	15.5
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>7.1</b>	7.5	9.5







# OIL ANALYSIS REPORT

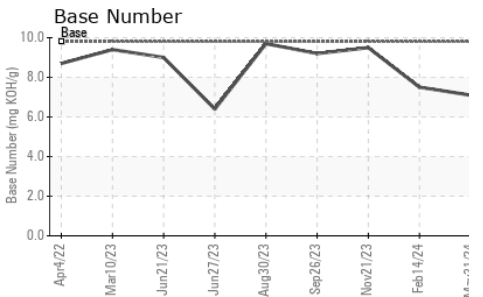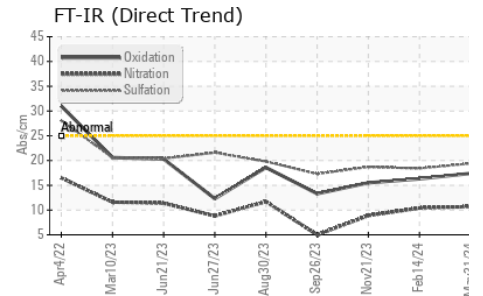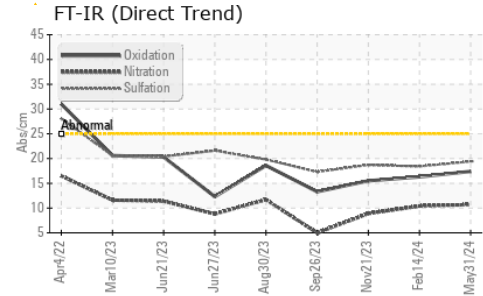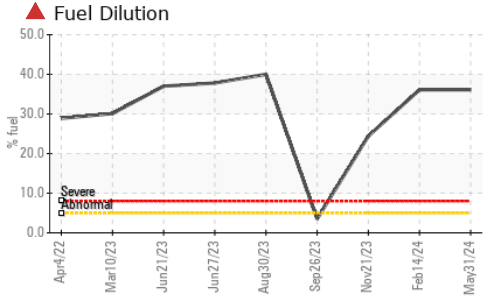

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 7.2	▲ 6.8

## GRAPHS

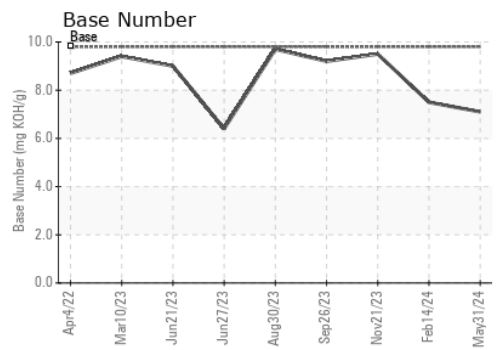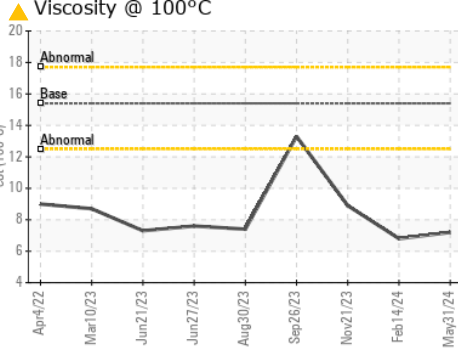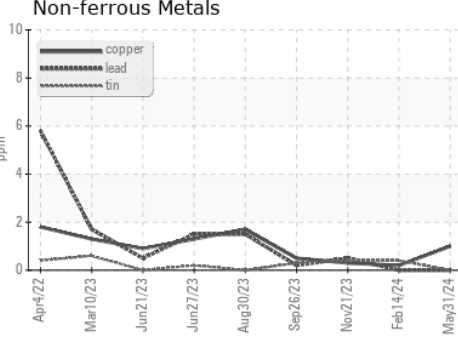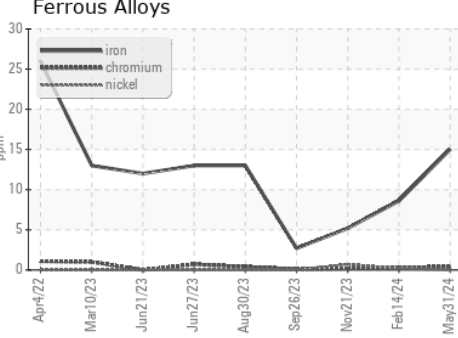

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0120866 **Received** : 04 Jun 2024  
**Lab Number** : 06198918 **Tested** : 06 Jun 2024  
**Unique Number** : 11061041 **Diagnosed** : 06 Jun 2024 - Don Baldrige  
**Test Package** : FLEET ( Additional Tests: PercentFuel )

**GFL Environmental - 622 - Traverse City Hauling**  
 160 Hughes Dr  
 Traverse City, MI  
 US 49686  
 Contact: GARY BREWER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: