OIL ANALYSIS REPORT

Sample Rating Trend

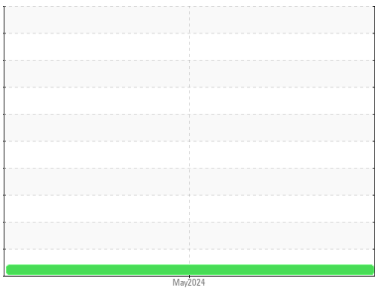

VIS DEBRIS

Area
PASTA [98923221]
Machine Id
A PRESS TRANS SIDE 1
Component
East Transmission
Fluid
ISO 320 (--- GAL)

DIAGNOSIS

Recommendation
The fluid filtered at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

Wear
All component wear rates are normal.

Contamination
Moderate concentration of visible dirt/debris present in the fluid.

Fluid Condition
The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number		Client Info		**PCA0124887**	---	---
Sample Date		Client Info		**25 May 2024**	---	---
Machine Age	hrs	Client Info		**0**	---	---
Oil Age	hrs	Client Info		**0**	---	---
Oil Changed		Client Info		**Filtered**	---	---
Sample Status				**ABNORMAL**	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Water		WC Method	>0.1	**NEG**	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	**2**	---	---
Chromium	ppm	ASTM D5185m	>10	**<1**	---	---
Nickel	ppm	ASTM D5185m		**0**	---	---
Titanium	ppm	ASTM D5185m		**0**	---	---
Silver	ppm	ASTM D5185m		**0**	---	---
Aluminum	ppm	ASTM D5185m	>50	**4**	---	---
Lead	ppm	ASTM D5185m	>50	**0**	---	---
Copper	ppm	ASTM D5185m	>200	**<1**	---	---
Tin	ppm	ASTM D5185m	>10	**<1**	---	---
Vanadium	ppm	ASTM D5185m		**<1**	---	---
Cadmium	ppm	ASTM D5185m		**0**	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		**0**	---	---
Barium	ppm	ASTM D5185m		**0**	---	---
Molybdenum	ppm	ASTM D5185m		**0**	---	---
Manganese	ppm	ASTM D5185m		**0**	---	---
Magnesium	ppm	ASTM D5185m		**<1**	---	---
Calcium	ppm	ASTM D5185m		**0**	---	---
Phosphorus	ppm	ASTM D5185m		**200**	---	---
Zinc	ppm	ASTM D5185m		**6**	---	---
Sulfur	ppm	ASTM D5185m		**436**	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	**4**	---	---
Sodium	ppm	ASTM D5185m		**4**	---	---
Potassium	ppm	ASTM D5185m	>20	**1**	---	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		**0.31**	---	---

OIL ANALYSIS REPORT

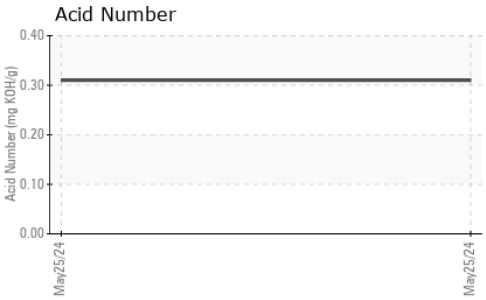

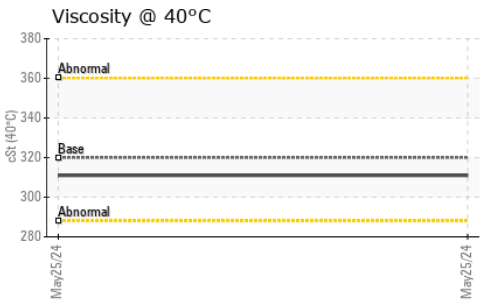

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	**NONE**	---	---
Yellow Metal	scalar	*Visual	NONE	**NONE**	---	---
Precipitate	scalar	*Visual	NONE	**NONE**	---	---
Silt	scalar	*Visual	NONE	**NONE**	---	---
Debris	scalar	*Visual	NONE	▲ **MODER**	---	---
Sand/Dirt	scalar	*Visual	NONE	**NONE**	---	---
Appearance	scalar	*Visual	NORML	**NORML**	---	---
Odor	scalar	*Visual	NORML	**NORML**	---	---
Emulsified Water	scalar	*Visual	>0.1	**NEG**	---	---
Free Water	scalar	*Visual		**NEG**	---	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	320	**311**	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				*no image*	*no image*
Bottom				*no image*	*no image*

GRAPHS

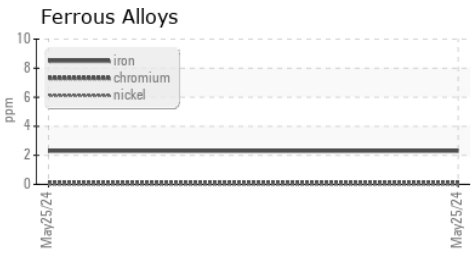

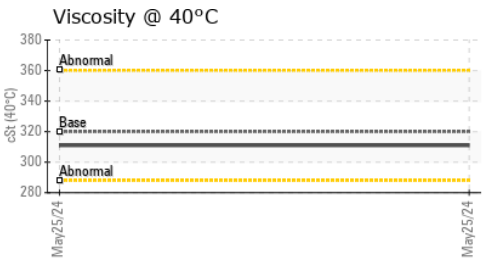

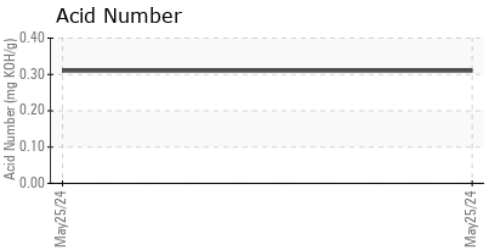

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0124887
Lab Number : 06199103
Unique Number : 11061226
Test Package : IND 2 (Additional Tests: PrtCount)

Received : 04 Jun 2024
Tested : 06 Jun 2024
Diagnosed : 06 Jun 2024 - Don Baldridge

Certificate L2367

KraftHeinz - Springfield - Plant 8311 PCA
2035 E BENNETT
SPRINGFIELD, MO
US 65804
Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.
** - Denotes test methods that are outside of the ISO 17025 scope of accreditation.*
Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: