
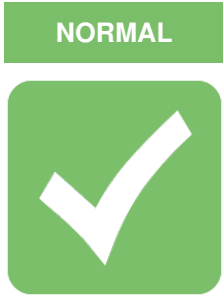


OIL ANALYSIS REPORT

Sample Rating Trend

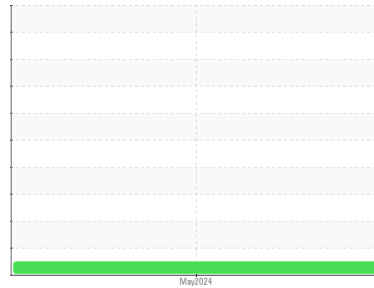

Machine Id
HYDREX MV 32 - PCA0119677
 Component
New (Unused) Oil
 Fluid
PETRO CANADA HYDREX MV 32 (--- LTR)

DIAGNOSIS

Recommendation
 This is a baseline read-out on the submitted sample.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PCA0119677	---	---
Sample Date	Client Info	30 May 2024	---	---
Machine Age	hrs Client Info	0	---	---
Oil Age	hrs Client Info	0	---	---
Oil Changed	Client Info	N/A	---	---
Sample Status		NORMAL	---	---

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method	NEG	---	---

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m	3	---	---
Chromium	ppm ASTM D5185m	<1	---	---
Nickel	ppm ASTM D5185m	<1	---	---
Titanium	ppm ASTM D5185m	0	---	---
Silver	ppm ASTM D5185m	0	---	---
Aluminum	ppm ASTM D5185m	0	---	---
Lead	ppm ASTM D5185m	0	---	---
Copper	ppm ASTM D5185m	1	---	---
Tin	ppm ASTM D5185m	<1	---	---
Vanadium	ppm ASTM D5185m	0	---	---
Cadmium	ppm ASTM D5185m	<1	---	---

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	0	---	---
Barium	ppm ASTM D5185m	<1	---	---
Molybdenum	ppm ASTM D5185m	0	---	---
Manganese	ppm ASTM D5185m	<1	---	---
Magnesium	ppm ASTM D5185m	<1	---	---
Calcium	ppm ASTM D5185m	49	---	---
Phosphorus	ppm ASTM D5185m	342	---	---
Zinc	ppm ASTM D5185m	420	---	---
Sulfur	ppm ASTM D5185m	936	---	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m	<1	---	---
Sodium	ppm ASTM D5185m	1	---	---
Potassium	ppm ASTM D5185m >20	2	---	---






FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >5000	1608	---	---
Particles >6µm	ASTM D7647 >1300	376	---	---
Particles >14µm	ASTM D7647 >160	60	---	---
Particles >21µm	ASTM D7647 >40	20	---	---
Particles >38µm	ASTM D7647 >10	1	---	---
Particles >71µm	ASTM D7647 >3	0	---	---
Oil Cleanliness	ISO 4406 (c) >19/17/14	18/16/13	---	---

FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g ASTM D8045	0.36	---	---

OIL ANALYSIS REPORT

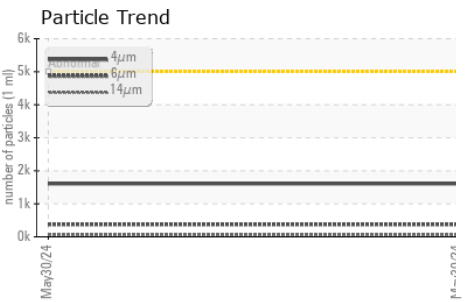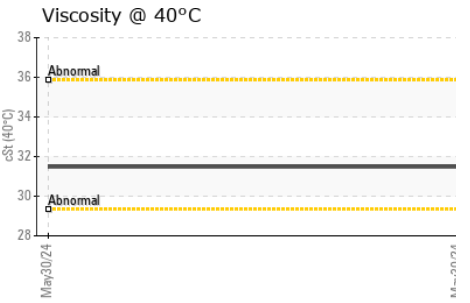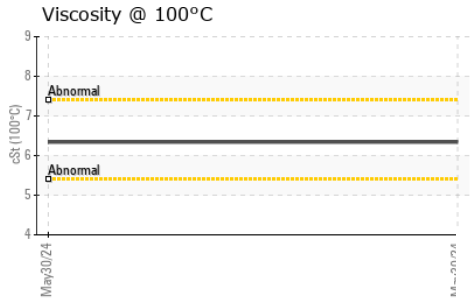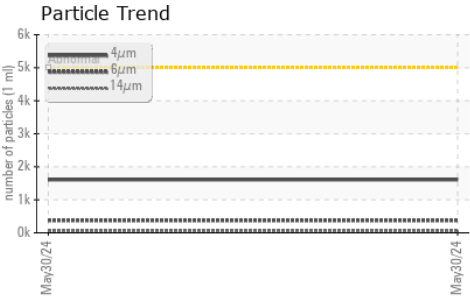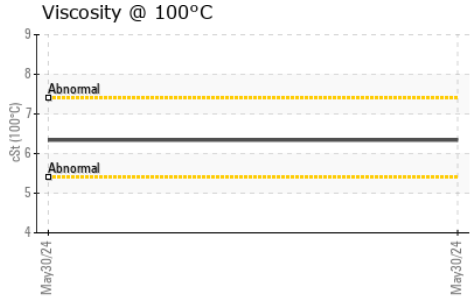






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	NEG	---	---
Free Water	scalar	*Visual	NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	31.48	---	---
Visc @ 100°C	cSt	ASTM D445	6.34	---	---
Viscosity Index (VI)	Scale	ASTM D2270	157	---	---

SAMPLE IMAGES

	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

GRAPHS

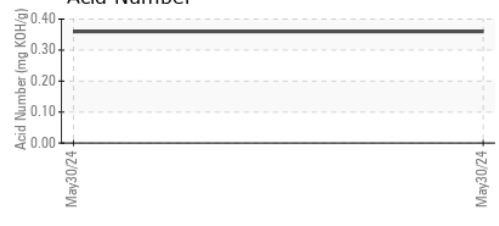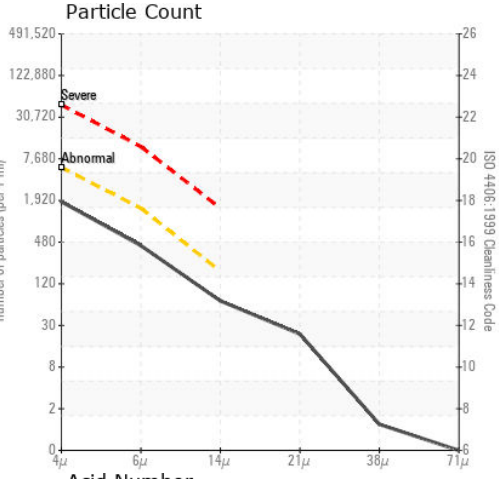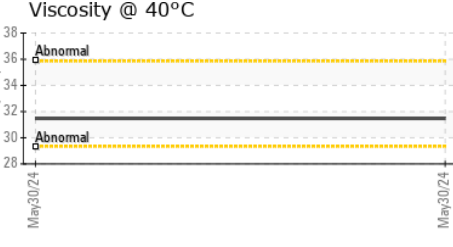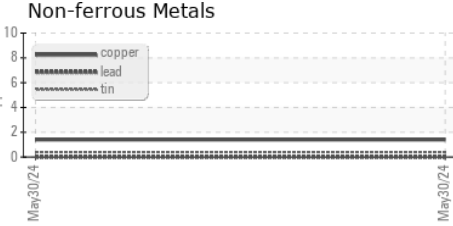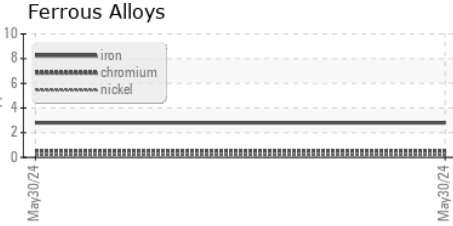

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0119677 **Received** : 04 Jun 2024
Lab Number : 06199714 **Tested** : 07 Jun 2024
Unique Number : 11061837 **Diagnosed** : 07 Jun 2024 - Jonathan Hester
Test Package : IND 2 (Additional Tests: FT-IR, ICP-NewOil, KV100, PrtCount, VI)

COLE OIL AND PROPANE
 265 FOREST AVE
 FOND DU LAC, WI
 US 54935
 Contact: JOE BANASZEK
 joe@coleoil.net

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)