




# OIL ANALYSIS REPORT

## Sample Rating Trend

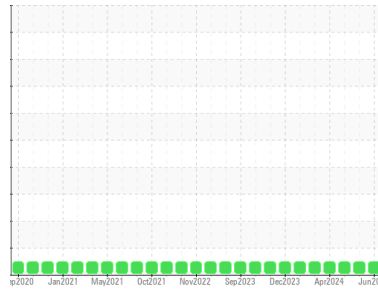

**NORMAL**



Area  
**(40878HA)**  
 Machine Id  
**426033-4021**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- LTR)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0116586</b>	GFL0116536	GFL0116610
Sample Date	Client Info	<b>03 Jun 2024</b>	02 May 2024	26 Apr 2024
Machine Age	hrs Client Info	<b>19363</b>	19180	19145
Oil Age	hrs Client Info	<b>19205</b>	19057	123
Oil Changed	Client Info	<b>Changed</b>	Not Changd	Not Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

### CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

### WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	<b>4</b>	2	5
Chromium	ppm ASTM D5185m >20	<b>0</b>	<1	<1
Nickel	ppm ASTM D5185m >4	<b>0</b>	0	0
Titanium	ppm ASTM D5185m	<b>0</b>	0	<1
Silver	ppm ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >20	<b>2</b>	<1	2
Lead	ppm ASTM D5185m >40	<b>0</b>	0	0
Copper	ppm ASTM D5185m >330	<b>&lt;1</b>	<1	1
Tin	ppm ASTM D5185m >15	<b>&lt;1</b>	0	<1
Vanadium	ppm ASTM D5185m	<b>0</b>	0	<1
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

### ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>15</b>	16	14
Barium	ppm ASTM D5185m 0	<b>&lt;1</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>58</b>	60	56
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm ASTM D5185m 1010	<b>892</b>	927	871
Calcium	ppm ASTM D5185m 1070	<b>1111</b>	1132	1081
Phosphorus	ppm ASTM D5185m 1150	<b>1083</b>	1077	1027
Zinc	ppm ASTM D5185m 1270	<b>1191</b>	1248	1180
Sulfur	ppm ASTM D5185m 2060	<b>3507</b>	3693	3267

### CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>4</b>	2	4
Sodium	ppm ASTM D5185m	<b>&lt;1</b>	<1	<1
Potassium	ppm ASTM D5185m >20	<b>2</b>	<1	2

### INFRA-RED




method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.5</b>	0.3	0.3
Nitration	Abs/cm *ASTM D7624 >20	<b>6.0</b>	5.3	5.1
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>18.1</b>	18.0	17.9

### FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>13.2</b>	12.9	12.7
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>8.7</b>	9.0	9.1







# OIL ANALYSIS REPORT

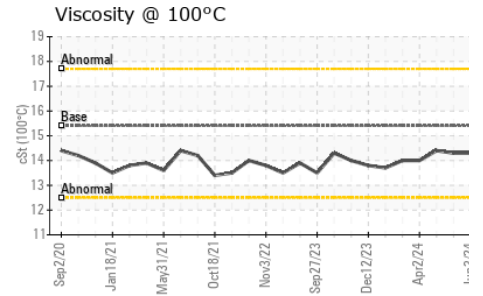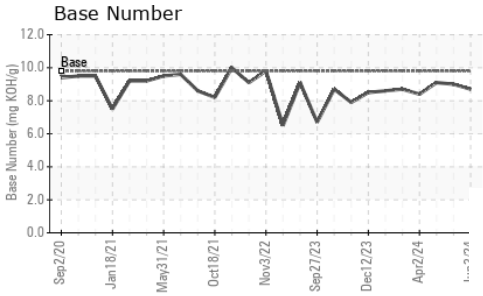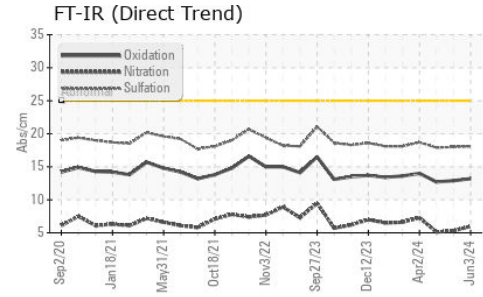

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	14.3	14.4

## GRAPHS

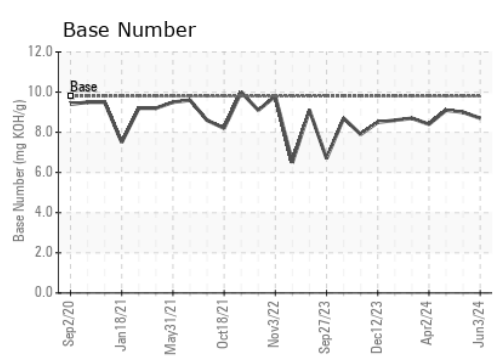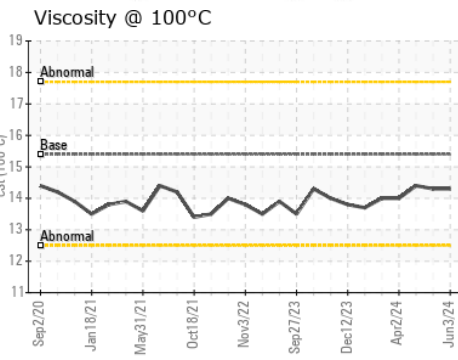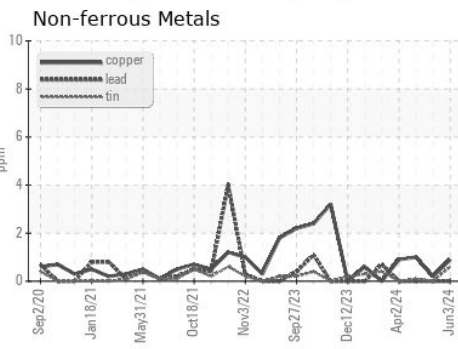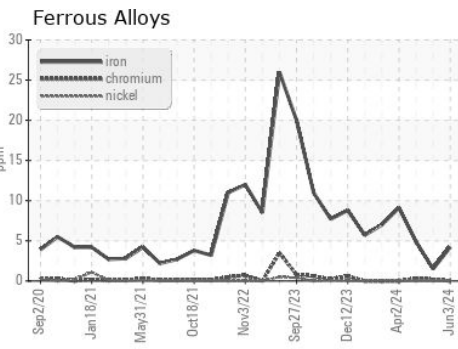

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0116586  
**Lab Number** : 06199806  
**Unique Number** : 11061929  
**Test Package** : FLEET  
**Received** : 05 Jun 2024  
**Tested** : 05 Jun 2024  
**Diagnosed** : 05 Jun 2024 - Wes Davis

**GFL Environmental - 652 - Fredericksburg Hauling**  
 10954 Houser Drive  
 Fredericksburg, VA  
 US 22408  
 Contact: WILLIAM MILO  
 wmilo@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)