




OIL ANALYSIS REPORT

Sample Rating Trend

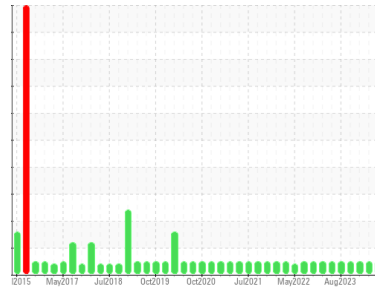

NORMAL



Machine Id
2517 PETERBILD 365
 Component
Diesel Engine
 Fluid
 DIESEL ENGINE OIL SAE 40 (48 QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. (Customer Sample Comment: Requested resample.)

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0117427	GFL0094750	GFL0103226
Sample Date	Client Info	03 Jun 2024	02 Feb 2024	09 Jan 2024
Machine Age	hrs	24796	23875	23660
Oil Age	hrs	0	0	0
Oil Changed	Client Info	Changed	Changed	Changed
Sample Status		NORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<1.0	<1.0	<1.0
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >165	8	7	9
Chromium	ppm ASTM D5185m >5	0	0	0
Nickel	ppm ASTM D5185m >4	0	0	0
Titanium	ppm ASTM D5185m >2	0	0	0
Silver	ppm ASTM D5185m >2	0	0	0
Aluminum	ppm ASTM D5185m >20	1	1	<1
Lead	ppm ASTM D5185m >150	0	0	2
Copper	ppm ASTM D5185m >90	<1	0	<1
Tin	ppm ASTM D5185m >5	<1	0	0
Vanadium	ppm ASTM D5185m	0	0	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 250	7	2	2
Barium	ppm ASTM D5185m 10	<1	0	0
Molybdenum	ppm ASTM D5185m 100	61	61	58
Manganese	ppm ASTM D5185m	<1	0	0
Magnesium	ppm ASTM D5185m 450	925	1052	971
Calcium	ppm ASTM D5185m 3000	1142	1164	1115
Phosphorus	ppm ASTM D5185m 1150	1110	1148	1001
Zinc	ppm ASTM D5185m 1350	1259	1347	1326
Sulfur	ppm ASTM D5185m 4250	3466	3428	2941

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >35	4	4	4
Sodium	ppm ASTM D5185m >216	3	3	4
Potassium	ppm ASTM D5185m >20	2	<1	<1

INFRA-RED




method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >7.5	0.4	0.3	0.5
Nitration	Abs/cm *ASTM D7624 >20	8.8	7.8	11.2
Sulfation	Abs/.1mm *ASTM D7415 >30	21.0	20.0	23.0

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	17.5	15.9	20.8
Base Number (BN)	mg KOH/g ASTM D2896 8.5	7.8	8.3	6.8







OIL ANALYSIS REPORT

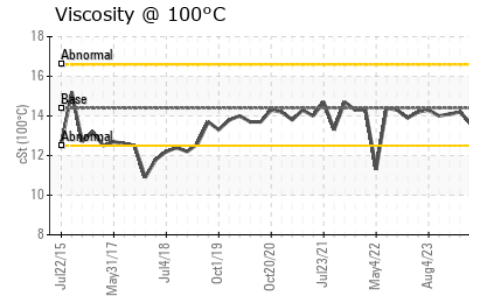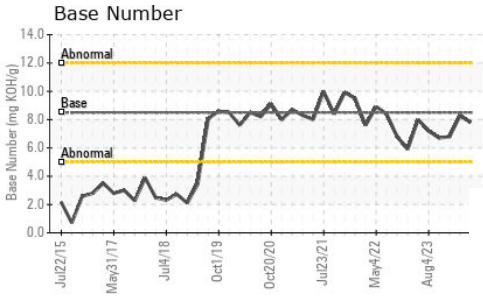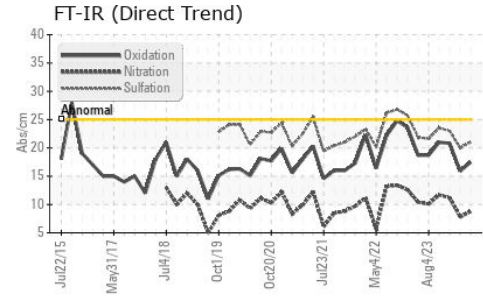

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	13.6	14.2	14.1

GRAPHS

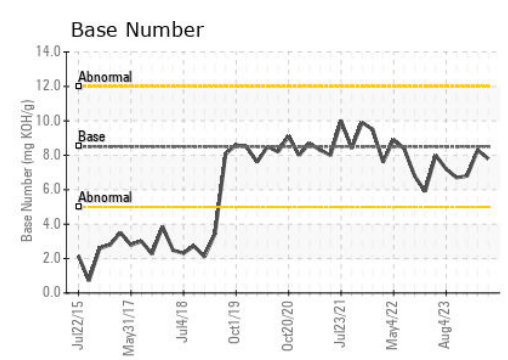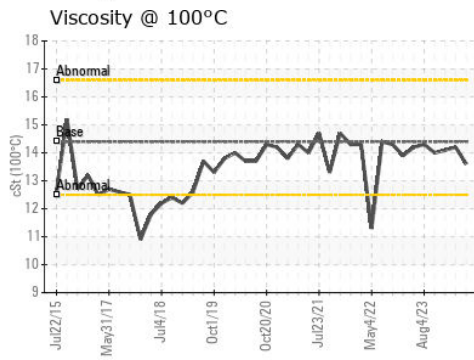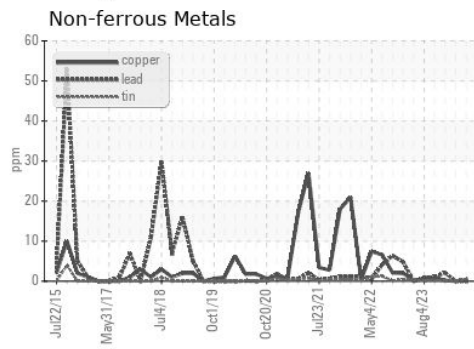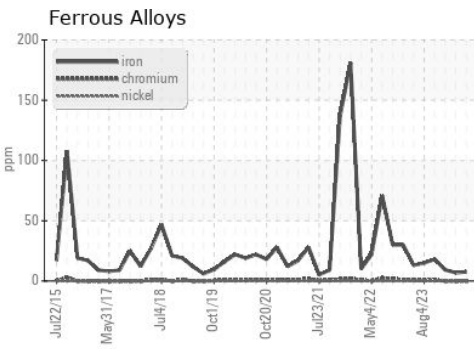

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0117427
Lab Number : 06199820
Unique Number : 11061943
Test Package : FLEET
Received : 05 Jun 2024
Tested : 05 Jun 2024
Diagnosed : 07 Jun 2024 - Sean Felton

GFL Environmental - 001 - Raleigh(CNG)
 3741 Conquest Drive
 Garner, NC
 US 27529
 Contact: Craig Johnson
 craig.johnson@gflenv.com
 T: (919)662-7100
 F: (919)662-7130

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)