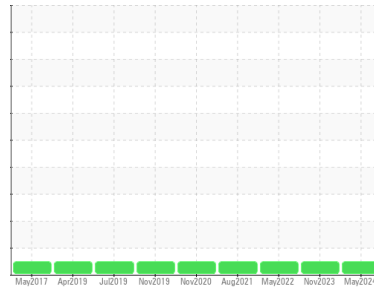


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**



Machine Id  
**JOHN DEERE 600-38**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (25 GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0106884</b>	PCA0106865	PCA0057436
Sample Date	Client Info			<b>24 May 2024</b>	30 Nov 2023	10 May 2022
Machine Age	hrs	Client Info		<b>10528</b>	10087	9186
Oil Age	hrs	Client Info		<b>500</b>	500	500
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>2.1		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.21		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>51	<b>15</b>	30	12
Chromium	ppm	ASTM D5185m	>11	<b>&lt;1</b>	1	<1
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	<1
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m	>31	<b>3</b>	2	2
Lead	ppm	ASTM D5185m	>26	<b>1</b>	2	<1
Copper	ppm	ASTM D5185m	>26	<b>&lt;1</b>	2	<1
Tin	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	0
Antimony	ppm	ASTM D5185m		<b>---</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

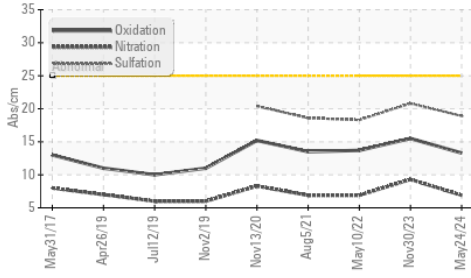
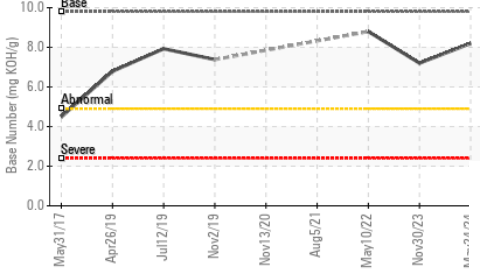
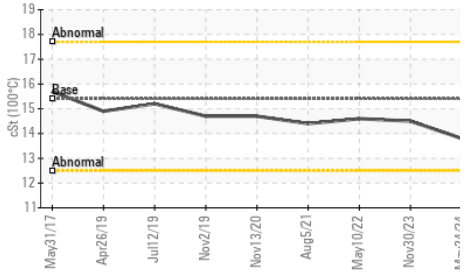
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	<b>14</b>	8	1
Barium	ppm	ASTM D5185m	0	<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185m	60	<b>49</b>	55	57
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	1010	<b>822</b>	918	1011
Calcium	ppm	ASTM D5185m	1070	<b>1333</b>	1182	1123
Phosphorus	ppm	ASTM D5185m	1150	<b>1066</b>	955	1062
Zinc	ppm	ASTM D5185m	1270	<b>1236</b>	1224	1246
Sulfur	ppm	ASTM D5185m	2060	<b>3428</b>	2715	2854

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>22	<b>4</b>	4	3
Sodium	ppm	ASTM D5185m	>31	<b>1</b>	1	0
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	0	0

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.8</b>	1.6	0.6
Nitration	Abs/cm	*ASTM D7624	>20	<b>6.9</b>	9.3	6.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>18.9</b>	20.8	18.3

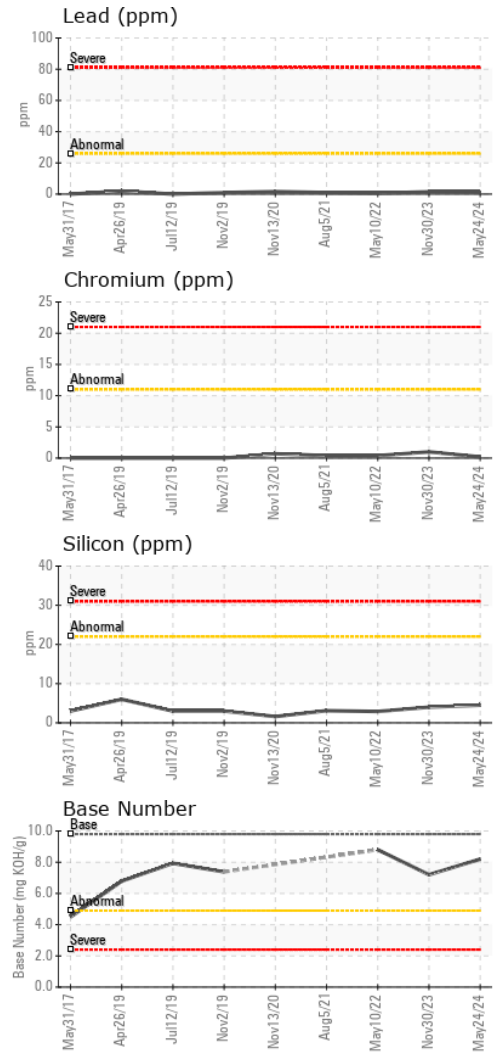
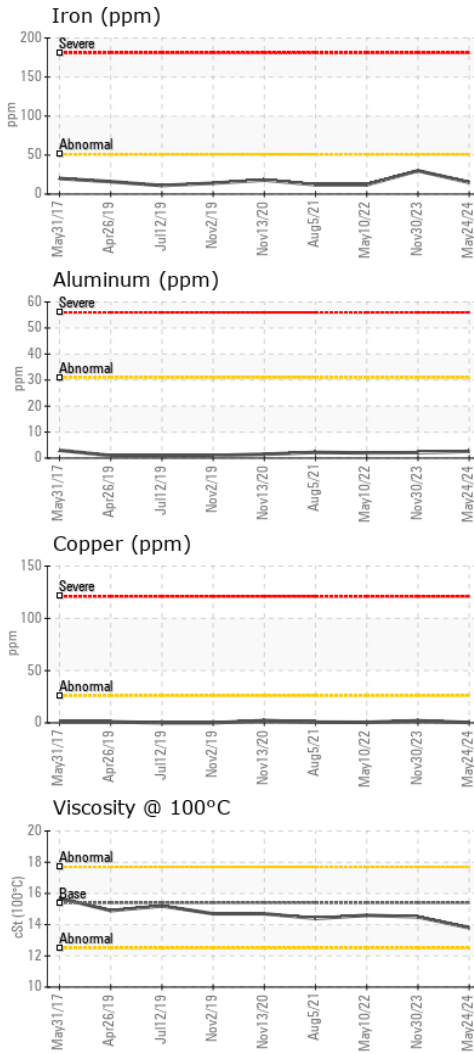
FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>13.3</b>	15.5	13.7
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>8.2</b>	7.2	8.8

# OIL ANALYSIS REPORT

**FT-IR (Direct Trend)**

**Base Number**

**Viscosity @ 100°C**


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.21	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.8	14.5

**GRAPHS**


Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : PCA0106884

**Lab Number** : 06201171

**Unique Number** : 11063294

**Test Package** : MOB 1 ( Additional Tests: TBN )

**Received** : 06 Jun 2024

**Tested** : 07 Jun 2024

**Diagnosed** : 07 Jun 2024 - Wes Davis

**GE MARSHALL EXCAVATION**

1351 JOLIET RD

VALPARAISO, IN

US 46385

Contact: MARK STEFFEL

mark.steffel@gemarshall.com

T:

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)