




# OIL ANALYSIS REPORT

Area  
**020**  
 Machine Id  
**814030**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (38 GAL)**

### Sample Rating Trend

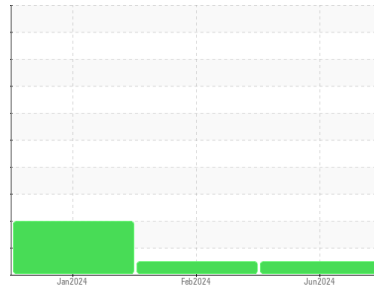

**NORMAL**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0117848</b>	GFL0103791	GFL0103815
Sample Date	Client Info		<b>04 Jun 2024</b>	29 Feb 2024	10 Jan 2024
Machine Age	hrs	Client Info	<b>1570</b>	934	612
Oil Age	hrs	Client Info	<b>636</b>	322	612
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	ABNORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	0.1
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>13</b>	16	39
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	1
Nickel	ppm	ASTM D5185m >5	<b>3</b>	6	8
Titanium	ppm	ASTM D5185m >2	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m >2	<b>&lt;1</b>	1	<1
Aluminum	ppm	ASTM D5185m >20	<b>1</b>	1	5
Lead	ppm	ASTM D5185m >40	<b>0</b>	0	3
Copper	ppm	ASTM D5185m >330	<b>177</b>	38	123
Tin	ppm	ASTM D5185m >15	<b>1</b>	0	5
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>5</b>	13	219
Barium	ppm	ASTM D5185m 0	<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>54</b>	67	124
Manganese	ppm	ASTM D5185m 0	<b>1</b>	<1	5
Magnesium	ppm	ASTM D5185m 1010	<b>841</b>	1056	787
Calcium	ppm	ASTM D5185m 1070	<b>997</b>	1241	1608
Phosphorus	ppm	ASTM D5185m 1150	<b>981</b>	1074	771
Zinc	ppm	ASTM D5185m 1270	<b>1141</b>	1348	946
Sulfur	ppm	ASTM D5185m 2060	<b>2846</b>	3283	2649

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>5</b>	9	▲ 66
Sodium	ppm	ASTM D5185m	<b>4</b>	2	3
Potassium	ppm	ASTM D5185m >20	<b>1</b>	<1	4

## INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>0.5</b>	0.3	0.4
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.5</b>	7.5	9.8
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>19.7</b>	19.7	24.5

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>16.1</b>	15.4	22.0
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>6.7</b>	7.5	7.4







# OIL ANALYSIS REPORT

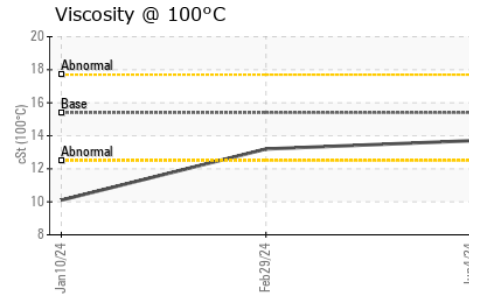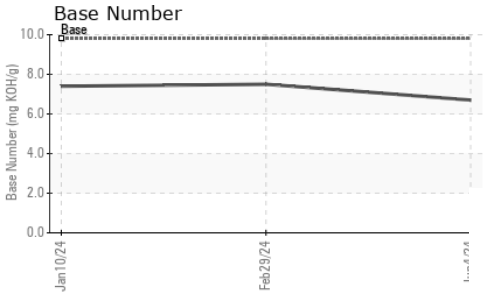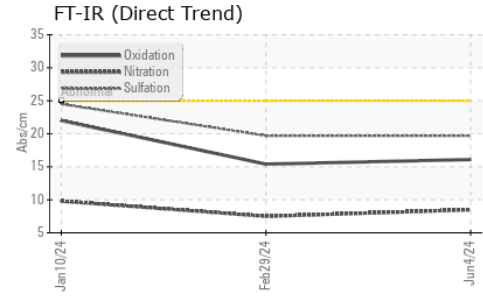

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.7	13.2

## GRAPHS

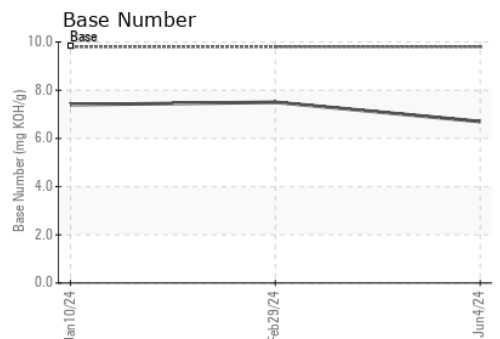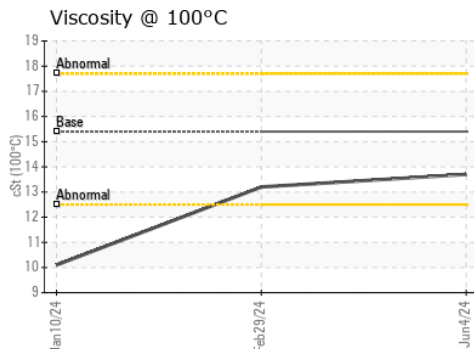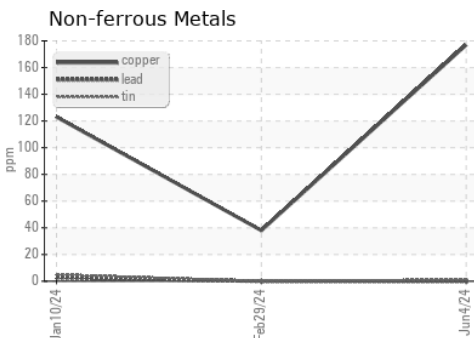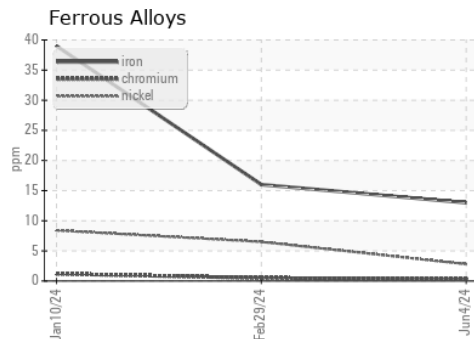

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0117848      **Received** : 06 Jun 2024  
**Lab Number** : **06201197**      **Tested** : 07 Jun 2024  
**Unique Number** : 11063320      **Diagnosed** : 07 Jun 2024 - Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 020 - Alamance**  
 703 East Gilbreath St  
 Graham, NC  
 US 27253  
 Contact: Jorge Costa  
 jorge.costa@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)