




# PROBLEM SUMMARY



Area  
**(YA020847) 020**  
 Machine Id  
**2336**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (54 QTS)**



Sample Rating Trend

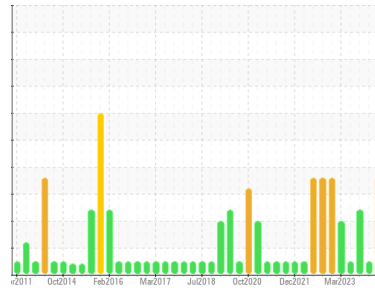

**SOOT**



## COMPONENT CONDITION SUMMARY

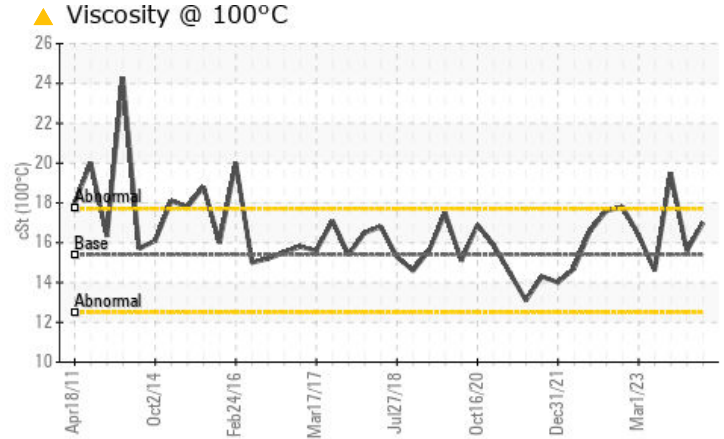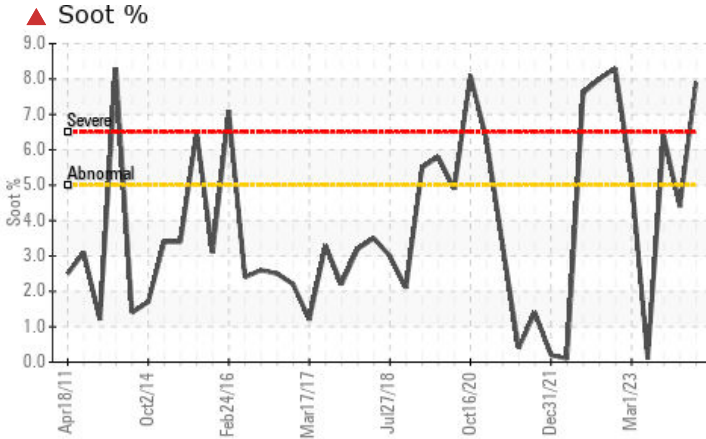

## RECOMMENDATION

We advise that you check for faulty combustion, plugged air filters, or aftercoolers. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition. NOTE: High solids (carbon/soot) in the sample have limited the accuracy of Infra-Red data including Total Base Number (TBN) value.

## PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	NORMAL	ABNORMAL
Soot %	%	*ASTM D7844	>5	▲ <b>7.9</b>	4.4	▲ 6.4
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	▲ <b>0.0</b>	8.5	▲ 0.0
Visc @ 100°C	cSt	ASTM D445	15.4	▲ <b>17.0</b>	15.6	▲ 19.5

Customer Id: GFL020  
 Sample No.: GFL0117851  
 Lab Number: 06201200  
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Don Baldrige +1  
[don.b505@comcast.net](mailto:don.b505@comcast.net)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Alert	---	---	?	NOTE: High solids (carbon/soot) in the sample have limited the accuracy of Infra-Red data including Total Base Number (TBN) value.
Check Combustion	---	---	?	We advise that you check for faulty combustion, plugged air filters, or aftercoolers.

## HISTORICAL DIAGNOSIS

### NORMAL



#### 10 Jan 2024 Diag: Wes Davis

Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

[view report](#)



### DEGRADATION



#### 17 Aug 2023 Diag: Jonathan Hester

We advise that you check for faulty combustion, plugged air filters, or aftercoolers. We recommend you service the filters on this component. We recommend an early resample to monitor this condition. NOTE: High solids (carbon/soot) in the sample have limited the accuracy of Infra-Red data including Total Base Number (TBN) value. All component wear rates are normal. There is an abnormal amount of solids and carbon present in the oil. The oil viscosity is higher than normal. The BN level is low.

[view report](#)



### NORMAL



#### 21 Jul 2023 Diag: Wes Davis

Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

[view report](#)






# OIL ANALYSIS REPORT



Area  
**(YA020847) 020**  
Machine Id  
**2336**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (54 QTS)**

Sample Rating Trend

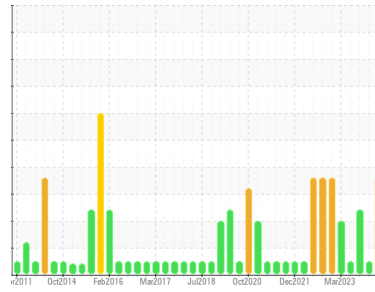

SOOT



## DIAGNOSIS

### ▲ Recommendation

We advise that you check for faulty combustion, plugged air filters, or aftercoolers. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition. NOTE: High solids (carbon/soot) in the sample have limited the accuracy of Infra-Red data including Total Base Number (TBN) value.

### Wear

All component wear rates are normal.

### ▲ Contamination

There is an abnormal amount of solids and carbon present in the oil.

### ▲ Fluid Condition

The oil viscosity is higher than normal. The BN level is low. The oil is no longer serviceable due to the presence of contaminants.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0117851</b>	GFL0103816	GFL0091178
Sample Date	Client Info	<b>04 Jun 2024</b>	10 Jan 2024	17 Aug 2023
Machine Age	hrs	<b>35995</b>	35369	0
Oil Age	hrs	<b>650</b>	602	600
Oil Changed	Client Info	<b>Changed</b>	Changed	Not Changd
Sample Status		<b>SEVERE</b>	NORMAL	ABNORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >120	<b>18</b>	15	29
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	<1	2
Nickel	ppm ASTM D5185m >5	<b>0</b>	<1	<1
Titanium	ppm ASTM D5185m >2	<b>0</b>	0	0
Silver	ppm ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >20	<b>2</b>	1	2
Lead	ppm ASTM D5185m >40	<b>&lt;1</b>	2	2
Copper	ppm ASTM D5185m >330	<b>1</b>	3	2
Tin	ppm ASTM D5185m >15	<b>&lt;1</b>	1	<1
Vanadium	ppm ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>10</b>	11	6
Barium	ppm ASTM D5185m 0	<b>&lt;1</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>52</b>	64	58
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm ASTM D5185m 1010	<b>814</b>	995	854
Calcium	ppm ASTM D5185m 1070	<b>905</b>	1179	1021
Phosphorus	ppm ASTM D5185m 1150	<b>949</b>	1093	931
Zinc	ppm ASTM D5185m 1270	<b>1053</b>	1330	1150
Sulfur	ppm ASTM D5185m 2060	<b>3132</b>	3398	2925

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>3</b>	5	<1
Sodium	ppm ASTM D5185m	<b>1</b>	1	<1
Potassium	ppm ASTM D5185m >20	<b>1</b>	0	2
Fuel	% ASTM D3524 >3.0	<b>&lt;1.0</b>	<1.0	<1.0


## INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >5	<b>▲ 7.9</b>	4.4	▲ 6.4
Nitration	Abs/cm *ASTM D7624 >20	<b>20.2</b>	10.1	23.3
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>38.5</b>	26.7	61.7


## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>45.2</b>	17.1	47.8
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>▲ 0.0</b>	8.5	▲ 0.0


### ▲ FT-IR (Direct Trend)

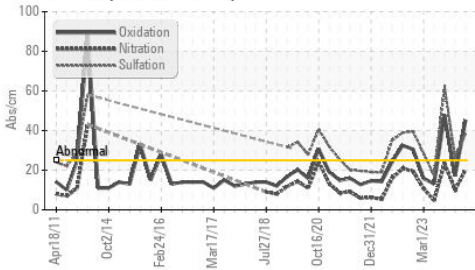


### ▲ Soot %

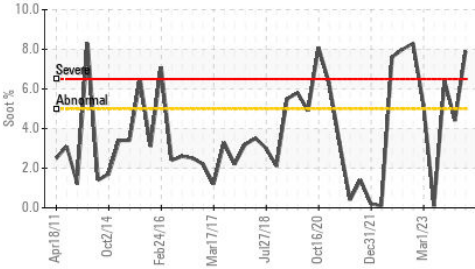


### Fuel Dilution

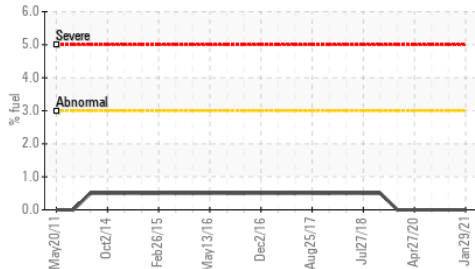

### ▲ Viscosity @ 100°C

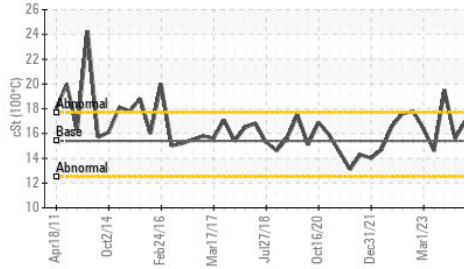

### Fuel Dilution

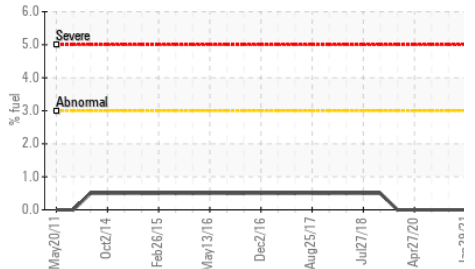

### VISUAL


	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

### FLUID PROPERTIES


	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4 ▲ 17.0	15.6	▲ 19.5

### GRAPHS


#### Ferrous Alloys

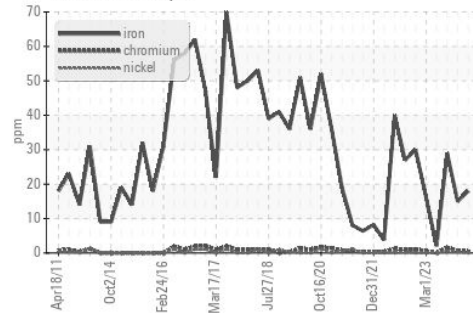


#### Non-ferrous Metals

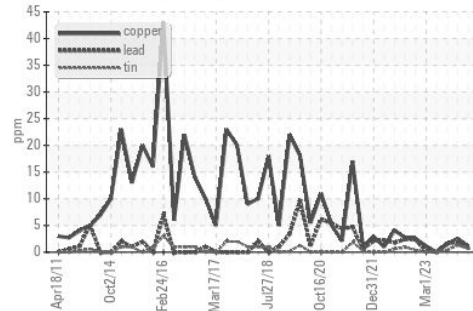

### ▲ Viscosity @ 100°C

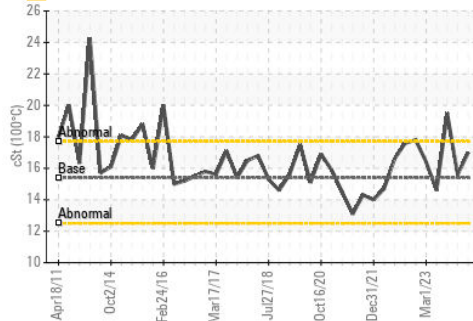

### ▲ Base Number

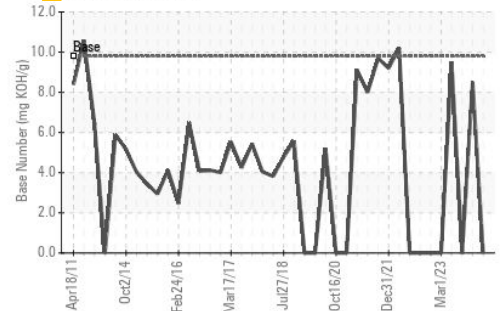

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : GFL0117851

Lab Number : 06201200

Unique Number : 11063323

Test Package : FLEET ( Additional Tests: FuelDilution, PercentFuel )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Received : 06 Jun 2024

Tested : 09 Jun 2024

Diagnosed : 09 Jun 2024 - Don Baldrige

GFL Environmental - 020 - Alamance

703 East Gilbreath St

Graham, NC

US 27253

Contact:

richard.belcher@gflenv.com

T: (800)207-6618

F: (336)229-0526