


OIL ANALYSIS REPORT

Sample Rating Trend



VISCOSITY

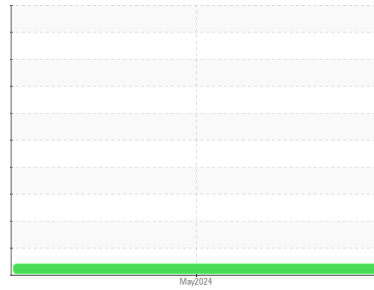

Machine Id
2327164

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- QTS)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

Metal levels are typical for a new component breaking in.

Contamination

Fuel content negligible. Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0123199	---	---
Sample Date	Client Info		30 May 2024	---	---
Machine Age	mls	Client Info	19500	---	---
Oil Age	mls	Client Info	0	---	---
Oil Changed	Client Info		N/A	---	---
Sample Status			ATTENTION	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	---	---
Glycol	WC Method		NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	29	---	---
Chromium	ppm	ASTM D5185m >20	<1	---	---
Nickel	ppm	ASTM D5185m >4	1	---	---
Titanium	ppm	ASTM D5185m	4	---	---
Silver	ppm	ASTM D5185m >3	23	---	---
Aluminum	ppm	ASTM D5185m >20	32	---	---
Lead	ppm	ASTM D5185m >40	<1	---	---
Copper	ppm	ASTM D5185m >330	16	---	---
Tin	ppm	ASTM D5185m >15	4	---	---
Vanadium	ppm	ASTM D5185m	0	---	---
Cadmium	ppm	ASTM D5185m	0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	333	---	---
Barium	ppm	ASTM D5185m 0	<1	---	---
Molybdenum	ppm	ASTM D5185m 60	123	---	---
Manganese	ppm	ASTM D5185m 0	4	---	---
Magnesium	ppm	ASTM D5185m 1010	706	---	---
Calcium	ppm	ASTM D5185m 1070	1443	---	---
Phosphorus	ppm	ASTM D5185m 1150	742	---	---
Zinc	ppm	ASTM D5185m 1270	852	---	---
Sulfur	ppm	ASTM D5185m 2060	2836	---	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	50	---	---
Sodium	ppm	ASTM D5185m	6	---	---
Potassium	ppm	ASTM D5185m >20	92	---	---
Fuel	%	ASTM D3524 >5	0.4	---	---





INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.2	---	---
Nitration	Abs/cm	*ASTM D7624 >20	9.0	---	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	23.7	---	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	20.8	---	---
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	8.0	---	---





OIL ANALYSIS REPORT

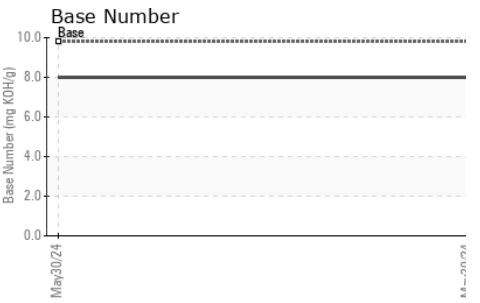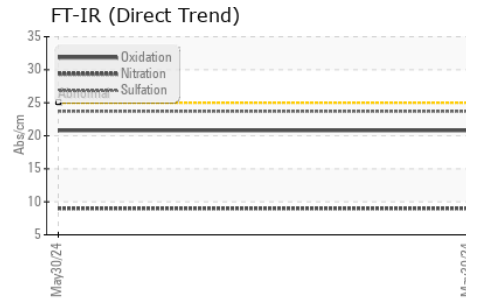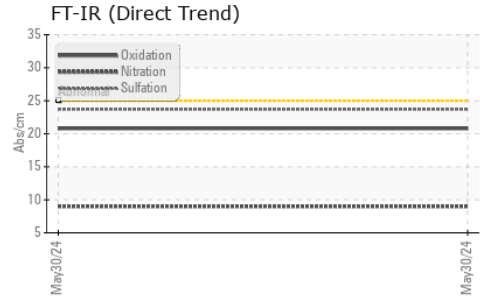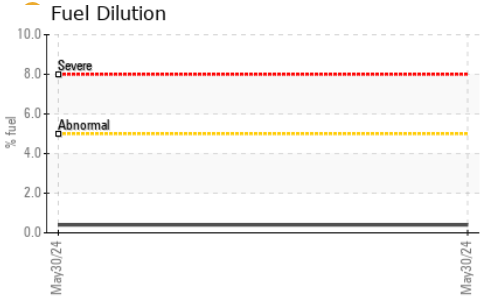

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	● 9.4	---	---

GRAPHS

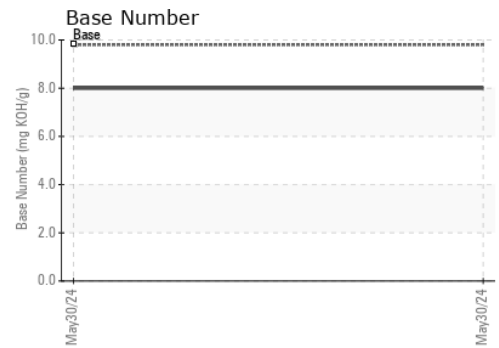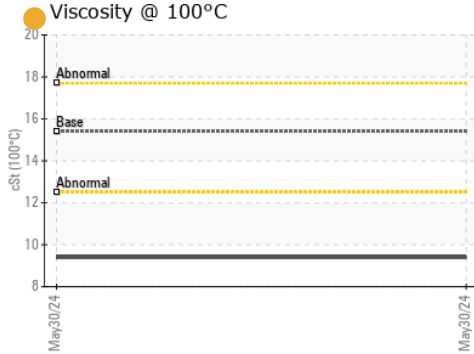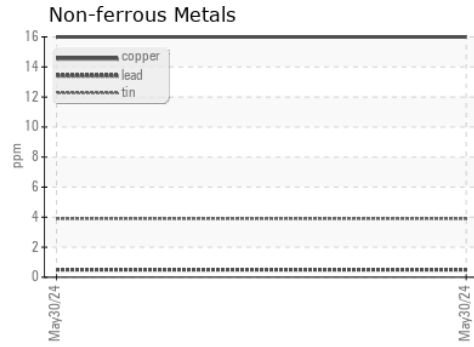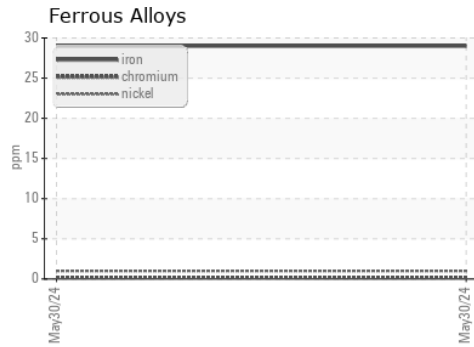

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0123199 **Received** : 06 Jun 2024
Lab Number : 06201215 **Tested** : 11 Jun 2024
Unique Number : 11063338 **Diagnosed** : 11 Jun 2024 - Sean Felton
Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

PERDUE FARMS - SALISBURY
 7036 ZION CHURCH ROAD
 SALISBURY, MD
 US 21802
 Contact: RICHARD O'NEAL
 richard.oneal@perdue.com
 T: (410)543-3628
 F: (410)341-2164

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)