




OIL ANALYSIS REPORT

Sample Rating Trend

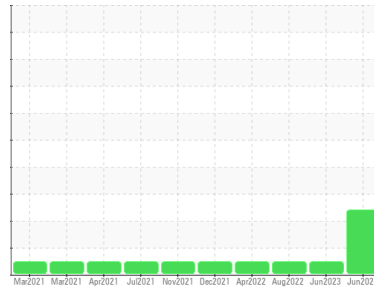

GLYCOL



Area
(YA156308)

Machine Id
910018

Component
Diesel Engine

Fluid
PETRO CANADA 15W40 (12 GAL)

DIAGNOSIS

Recommendation

Check for low coolant level. We advise that you check for the source of the coolant leak. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

Sodium and/or potassium levels are high.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			GFL0094479	GFL0048080	GFL0039431
Sample Date	Client Info			04 Jun 2024	20 Jun 2023	03 Aug 2022
Machine Age	hrs	Client Info		12092	2312	0
Oil Age	hrs	Client Info		600	2312	0
Oil Changed	Client Info			Changed	N/A	N/A
Sample Status				ATTENTION	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>3.0		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>90	7	38	0
Chromium	ppm	ASTM D5185m	>20	<1	1	<1
Nickel	ppm	ASTM D5185m	>2	0	0	0
Titanium	ppm	ASTM D5185m	>2	<1	0	<1
Silver	ppm	ASTM D5185m	>2	0	0	<1
Aluminum	ppm	ASTM D5185m	>20	4	2	0
Lead	ppm	ASTM D5185m	>40	0	0	<1
Copper	ppm	ASTM D5185m	>330	<1	1	0
Tin	ppm	ASTM D5185m	>15	<1	0	<1
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		4	5	14
Barium	ppm	ASTM D5185m		1	0	0
Molybdenum	ppm	ASTM D5185m		66	60	57
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m		889	967	848
Calcium	ppm	ASTM D5185m		1135	1194	1081
Phosphorus	ppm	ASTM D5185m		933	996	937
Zinc	ppm	ASTM D5185m		1190	1272	1136
Sulfur	ppm	ASTM D5185m		3162	3140	2950

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	5	6	2
Sodium	ppm	ASTM D5185m		122	6	4
Potassium	ppm	ASTM D5185m	>20	15	3	2
Glycol	%	*ASTM D2982		NEG	NEG	NEG


INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>6	0.4	2.6	0.3
Nitration	Abs/cm	*ASTM D7624	>20	6.3	13.0	6.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.1	28.8	19.2

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	13.3	22.9	14.1
Base Number (BN)	mg KOH/g	ASTM D2896		8.6	5.5	10




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

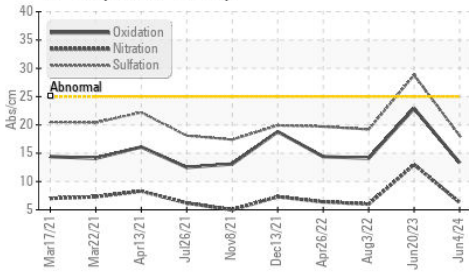


Glycol Contamination

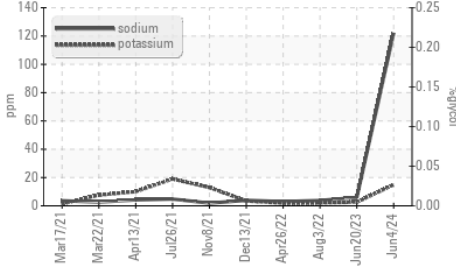

Viscosity @ 100°C

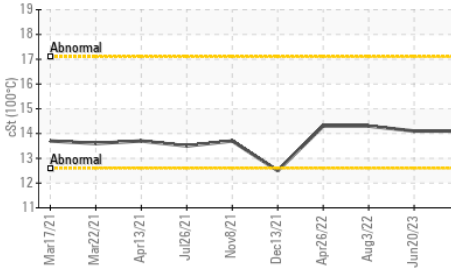

Glycol Contamination

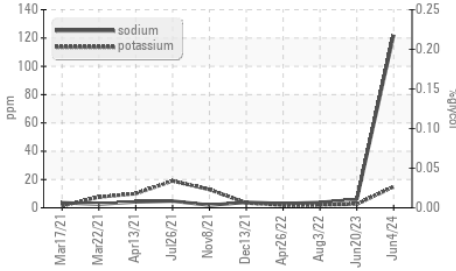


PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.1	14.1	14.3

GRAPHS


Ferrous Alloys

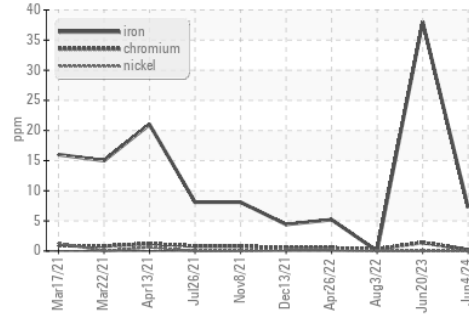


Non-ferrous Metals

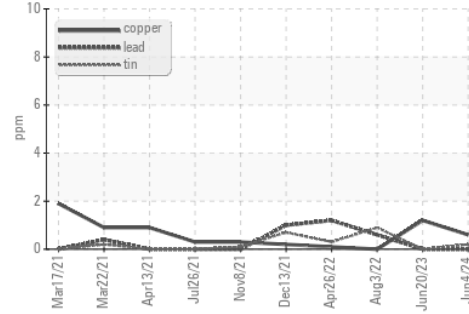

Viscosity @ 100°C

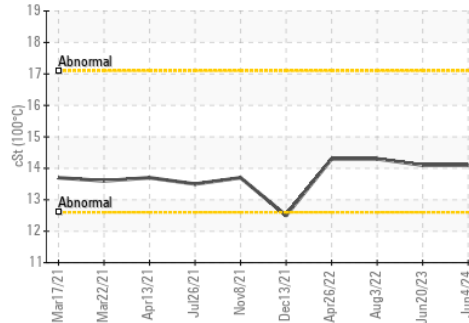

Base Number

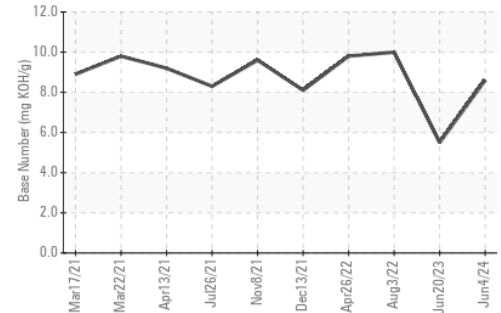

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : GFL0094479

Lab Number : 06201315

Unique Number : 11063438

Test Package : FLEET (Additional Tests: Glycol)

Received : 06 Jun 2024

Tested : 11 Jun 2024

Diagnosed : 11 Jun 2024 - Sean Felton

GFL Environmental - 019 - Greenville/TriEast

415 Staton Road

Greenville, NC

US 27834

Contact: Spencer Ligon

spencer.ligon@gflenv.com

T: (800)207-6618

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)