


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

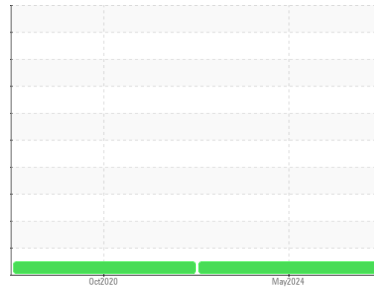

Machine Id  
**Kleeman**  
 Component  
**Diesel Engine**

Fluid  
 **DIESEL ENGINE OIL SAE 40 (2 GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DIESEL ENGINE OIL SAE 40. Please confirm. Please specify the component make and model with your next sample.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0098381</b>	PCA0023190	---
Sample Date	Client Info			<b>29 May 2024</b>	06 Oct 2020	---
Machine Age	hrs	Client Info		<b>1396</b>	787	---
Oil Age	hrs	Client Info		<b>300</b>	390	---
Oil Changed	Client Info			<b>Changed</b>	Changed	---
Sample Status				<b>NORMAL</b>	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	---
Water	WC Method	>0.2		<b>NEG</b>	NEG	---
Glycol	WC Method			<b>NEG</b>	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>14</b>	15	---
Chromium	ppm	ASTM D5185m	>20	<b>3</b>	3	---
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m		<b>0</b>	1	---
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>20	<b>2</b>	0	---
Lead	ppm	ASTM D5185m	>40	<b>0</b>	0	---
Copper	ppm	ASTM D5185m	>330	<b>&lt;1</b>	3	---
Tin	ppm	ASTM D5185m	>15	<b>0</b>	<1	---
Antimony	ppm	ASTM D5185m		<b>---</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	---




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	250	<b>0</b>	221	---
Barium	ppm	ASTM D5185m	10	<b>0</b>	<1	---
Molybdenum	ppm	ASTM D5185m	100	<b>69</b>	70	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m	450	<b>1029</b>	675	---
Calcium	ppm	ASTM D5185m	3000	<b>1214</b>	1320	---
Phosphorus	ppm	ASTM D5185m	1150	<b>1101</b>	776	---
Zinc	ppm	ASTM D5185m	1350	<b>1332</b>	912	---
Sulfur	ppm	ASTM D5185m	4250	<b>3807</b>	2428	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>8</b>	11	---
Sodium	ppm	ASTM D5185m	>216	<b>2</b>	3	---
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	5	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.1</b>	0.1	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>6.2</b>	7.5	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>17.7</b>	20.1	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>13.2</b>	14.5	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>9.93</b>	8.32	---










# OIL ANALYSIS REPORT

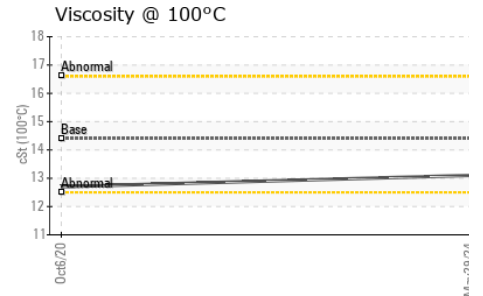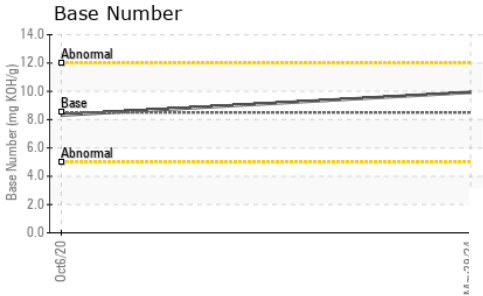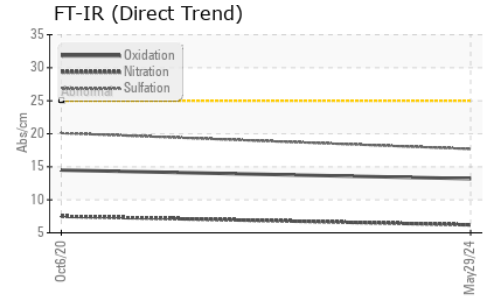

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	13.1	12.7

## GRAPHS

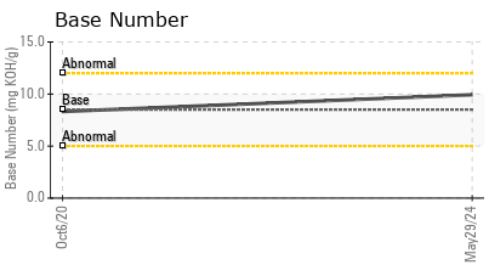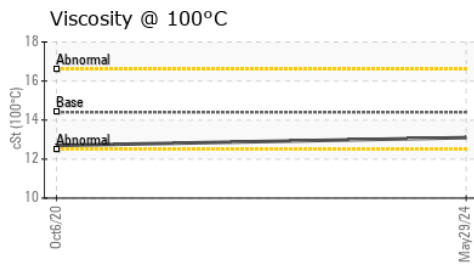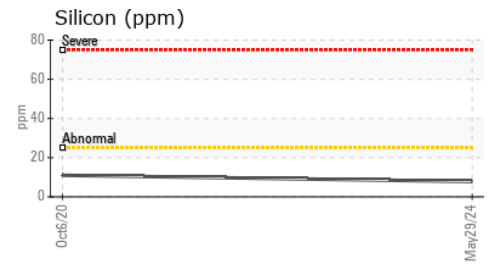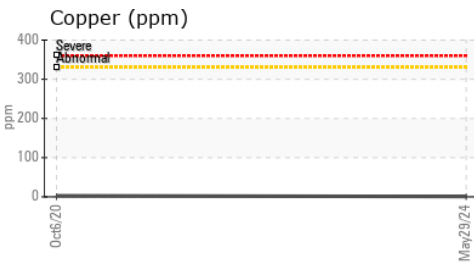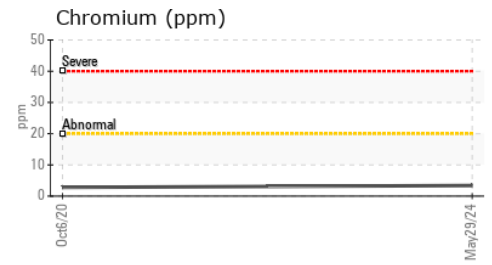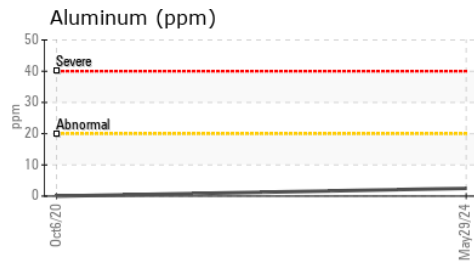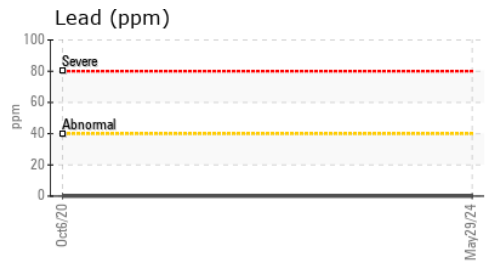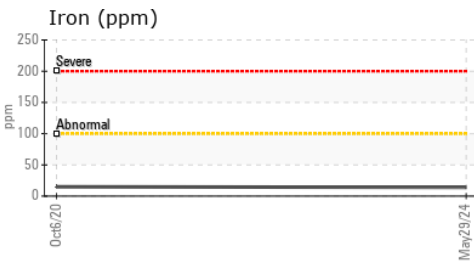

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0098381      **Received** : 06 Jun 2024  
**Lab Number** : **06201642**      **Tested** : 07 Jun 2024  
**Unique Number** : 11063765      **Diagnosed** : 07 Jun 2024 - Wes Davis  
**Test Package** : MOB 2

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**J F PRICE**  
 611 PLEASANT ST  
 E WEYMOUTH, MA  
 US 02189  
 Contact: JOHN LANG  
 gnalj1970@comcast.net  
 T: (617)435-7199  
 F: (781)337-4150