


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

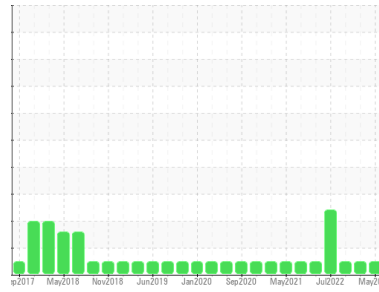

Machine Id  
**PETERBILT 24**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON HP 15W40 (8 GAL)**

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0098383</b>	PCA0104386	PCA0090563
Sample Date	Client Info		<b>15 May 2024</b>	10 Jan 2024	15 Aug 2023
Machine Age	mls	Client Info	<b>614814</b>	607478	599000
Oil Age	mls	Client Info	<b>0</b>	8500	7500
Oil Changed	Client Info		<b>N/A</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>13</b>	11	10
Chromium	ppm	ASTM D5185m >6	<b>&lt;1</b>	0	<1
Nickel	ppm	ASTM D5185m >4	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m >2	<b>1</b>	<1	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >30	<b>1</b>	<1	1
Lead	ppm	ASTM D5185m >10	<b>&lt;1</b>	3	0
Copper	ppm	ASTM D5185m >150	<b>8</b>	27	85
Tin	ppm	ASTM D5185m >4	<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>0</b>	12	0
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>49</b>	54	61
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	1	<1
Magnesium	ppm	ASTM D5185m	<b>736</b>	800	1001
Calcium	ppm	ASTM D5185m	<b>1430</b>	953	1100
Phosphorus	ppm	ASTM D5185m	<b>1029</b>	902	1045
Zinc	ppm	ASTM D5185m	<b>1213</b>	1098	1276
Sulfur	ppm	ASTM D5185m	<b>3771</b>	2684	3574

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>4</b>	<1	5
Sodium	ppm	ASTM D5185m	<b>2</b>	1	<1
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	0
Fuel	%	ASTM D3524 >5	<b>0.8</b>	<1.0	<1.0





## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.1</b>	0.2	0.2
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.3</b>	7.8	6.4
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>17.8</b>	19.2	18.4

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>13.1</b>	15.4	14.2
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>9.19</b>	8.74	11.33









# OIL ANALYSIS REPORT

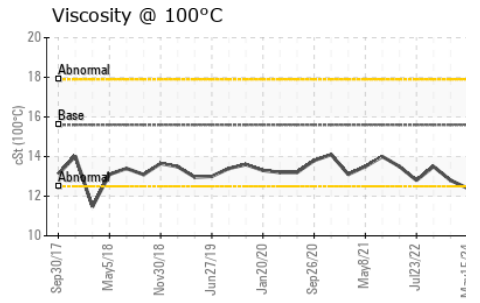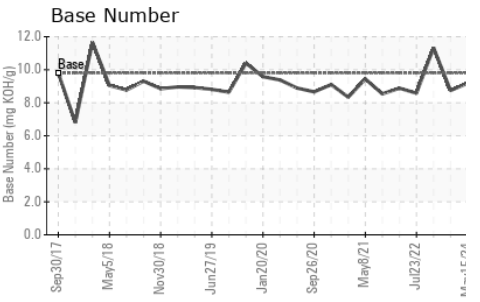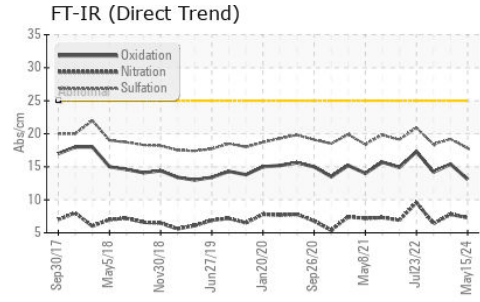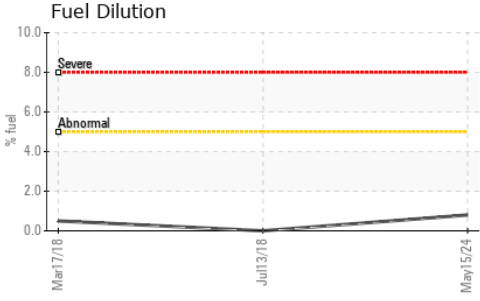

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.6	<b>12.4</b>	12.8	13.5

## GRAPHS

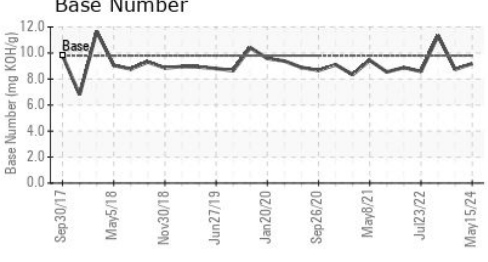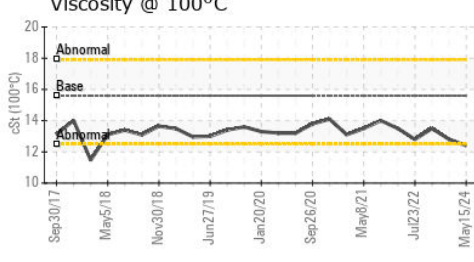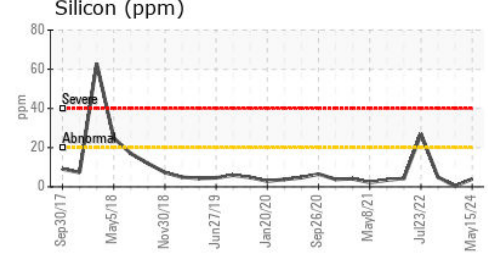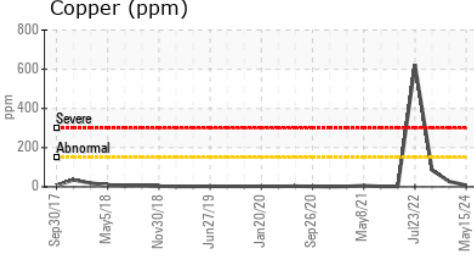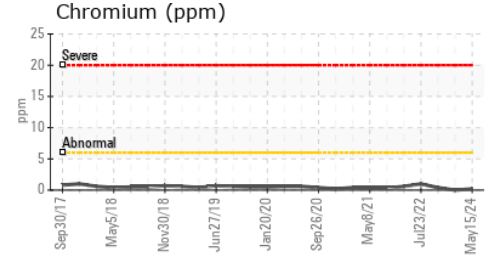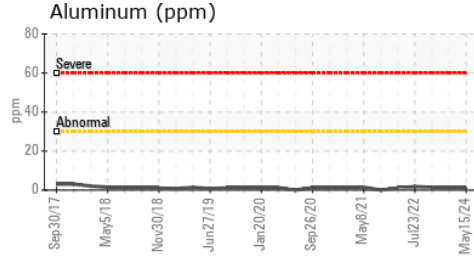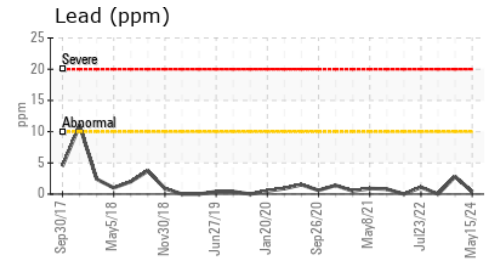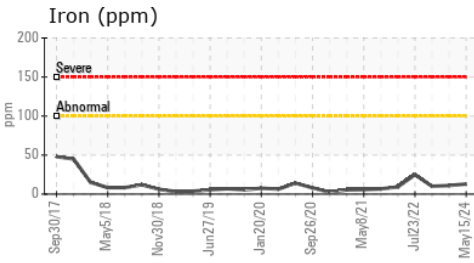

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0098383      **Received** : 06 Jun 2024  
**Lab Number** : **06201654**      **Tested** : 10 Jun 2024  
**Unique Number** : 11063777      **Diagnosed** : 10 Jun 2024 - Wes Davis  
**Test Package** : MOB 2 ( Additional Tests: FuelDilution, PercentFuel )

**J F PRICE**  
 611 PLEASANT ST  
 E WEYMOUTH, MA  
 US 02189  
 Contact: JOHN LANG  
 gnalj1970@comcast.net  
 T: (617)435-7199  
 F: (781)337-4150

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)