


OIL ANALYSIS REPORT

Sample Rating Trend



WEAR

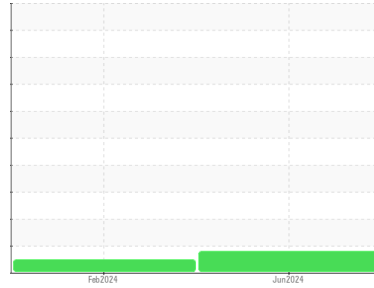

Area
(68545Z) Walgreens - Tractor
 Machine Id
[Walgreens - Tractor] 136A624286
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (11 GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

The copper level is abnormal. In the absence of other significant wear metals, suspect copper due to sources other than wear (i.e. cooling core). All other metal levels are typical for a new component breaking in.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0119082	PCA0105884	---
Sample Date	Client Info		04 Jun 2024	20 Feb 2024	---
Machine Age	mls	Client Info	39372	18294	---
Oil Age	mls	Client Info	39372	18294	---
Oil Changed	Client Info		N/A	Oil Added	---
Sample Status			ABNORMAL	NORMAL	---

CONTAMINATION	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	---
Water	WC Method	>0.2	NEG	NEG	---
Glycol	WC Method		NEG	NEG	---

WEAR METALS	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >80	48	29	---
Chromium	ppm	ASTM D5185m >5	4	3	---
Nickel	ppm	ASTM D5185m >2	1	1	---
Titanium	ppm	ASTM D5185m	<1	<1	---
Silver	ppm	ASTM D5185m >3	<1	<1	---
Aluminum	ppm	ASTM D5185m >30	113	47	---
Lead	ppm	ASTM D5185m >30	<1	<1	---
Copper	ppm	ASTM D5185m >150	▲ 306	76	---
Tin	ppm	ASTM D5185m >5	5	4	---
Vanadium	ppm	ASTM D5185m	0	0	---
Cadmium	ppm	ASTM D5185m	0	0	---






ADDITIVES	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	30	38	---
Barium	ppm	ASTM D5185m 0	0	0	---
Molybdenum	ppm	ASTM D5185m 50	51	48	---
Manganese	ppm	ASTM D5185m 0	4	3	---
Magnesium	ppm	ASTM D5185m 950	638	642	---
Calcium	ppm	ASTM D5185m 1050	1627	1576	---
Phosphorus	ppm	ASTM D5185m 995	927	874	---
Zinc	ppm	ASTM D5185m 1180	1018	1045	---
Sulfur	ppm	ASTM D5185m 2600	2446	2737	---

CONTAMINANTS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	7	7	---
Sodium	ppm	ASTM D5185m	4	6	---
Potassium	ppm	ASTM D5185m >20	312	162	---

INFRA-RED	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.7	0.4	---
Nitration	Abs/cm	*ASTM D7624 >20	9.2	7.3	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	22.5	22.2	---

FLUID DEGRADATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	20.9	19.4	---
Base Number (BN)	mg KOH/g	ASTM D2896	7.8	9.0	---





OIL ANALYSIS REPORT

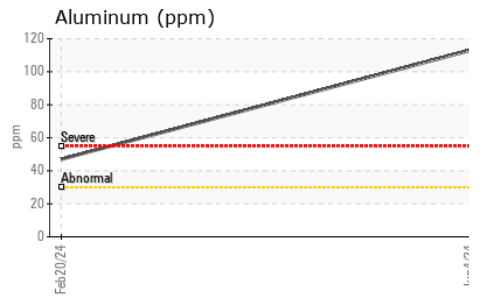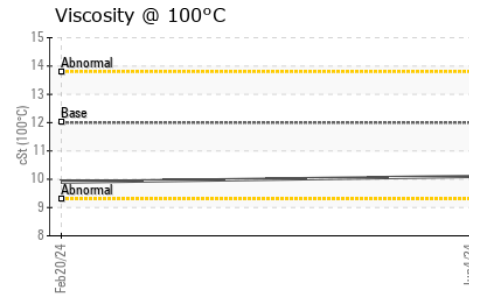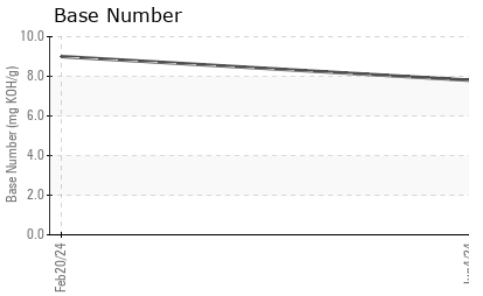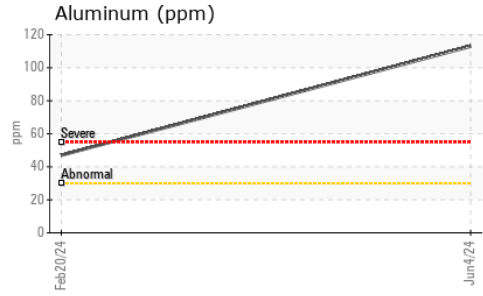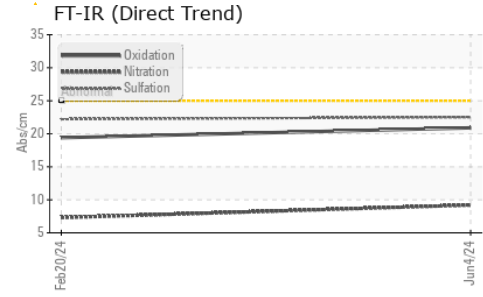

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	10.1	9.9

GRAPHS

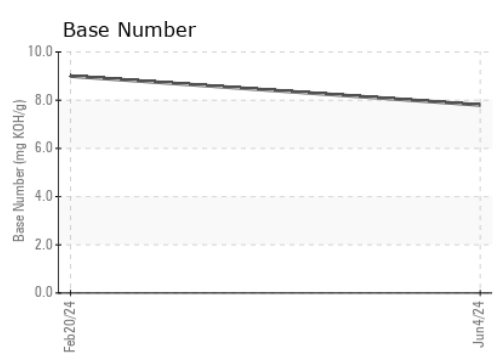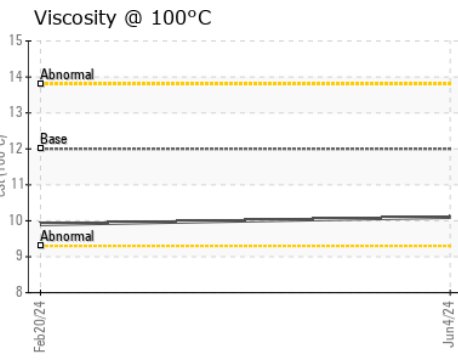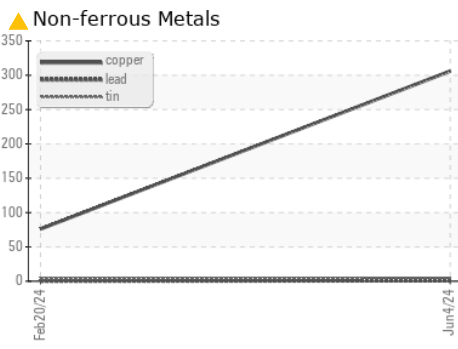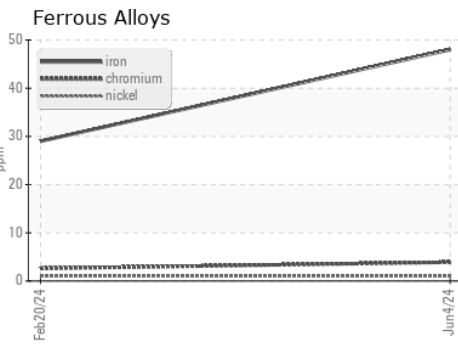

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0119082 **Received** : 06 Jun 2024
Lab Number : 06202247 **Tested** : 11 Jun 2024
Unique Number : 11069708 **Diagnosed** : 11 Jun 2024 - Sean Felton
Test Package : FLEET

Transervice - Shop 1361 - Berkeley-Windsor
 4400 State Road 19
 Windsor, WI
 US 53598
 Contact: Mike Hurda
 mhurda@transervice.com
 T: (608)846-2726
 F: (608)846-0389

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)