




OIL ANALYSIS REPORT



Machine Id
1037A
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (11 GAL)

Sample Rating Trend

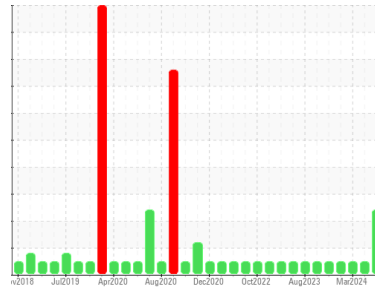

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

The aluminum level is abnormal. All other component wear rates are normal.

Contamination

Elemental level of silicon (Si) above normal indicating ingress of seal material.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0118478	GFL0095316	GFL0104988
Sample Date	Client Info	04 Jun 2024	28 Mar 2024	05 Mar 2024
Machine Age	hrs	Client Info	18785	18718
Oil Age	hrs	Client Info	650	0
Oil Changed	Client Info	Not Changed	Changed	Not Changed
Sample Status		ABNORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<1.0	<1.0	<1.0
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >120	59	10	12
Chromium	ppm ASTM D5185m >20	3	<1	0
Nickel	ppm ASTM D5185m >5	<1	<1	0
Titanium	ppm ASTM D5185m >2	<1	7	<1
Silver	ppm ASTM D5185m >2	0	0	0
Aluminum	ppm ASTM D5185m >20	▲ 54	2	5
Lead	ppm ASTM D5185m >40	<1	<1	0
Copper	ppm ASTM D5185m >330	20	2	2
Tin	ppm ASTM D5185m >15	1	<1	<1
Vanadium	ppm ASTM D5185m	<1	<1	<1
Cadmium	ppm ASTM D5185m	0	<1	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	176	16	0
Barium	ppm ASTM D5185m 0	5	0	0
Molybdenum	ppm ASTM D5185m 60	131	58	64
Manganese	ppm ASTM D5185m 0	7	<1	<1
Magnesium	ppm ASTM D5185m 1010	713	862	1000
Calcium	ppm ASTM D5185m 1070	1525	1106	1112
Phosphorus	ppm ASTM D5185m 1150	762	944	983
Zinc	ppm ASTM D5185m 1270	882	1194	1204
Sulfur	ppm ASTM D5185m 2060	2555	3310	2881

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	▲ 27	8	12
Sodium	ppm ASTM D5185m	4	28	5
Potassium	ppm ASTM D5185m >20	153	38	<1

INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >4	0.3	0.1	0.3
Nitration	Abs/cm *ASTM D7624 >20	10.2	5.6	7.6
Sulfation	Abs/.1mm *ASTM D7415 >30	24.1	16.3	19.4


FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	20.7	13.5	15.5
Base Number (BN)	mg KOH/g ASTM D2896 9.8	7.3	10.5	7.4




OIL ANALYSIS REPORT


▲ Aluminum (ppm)

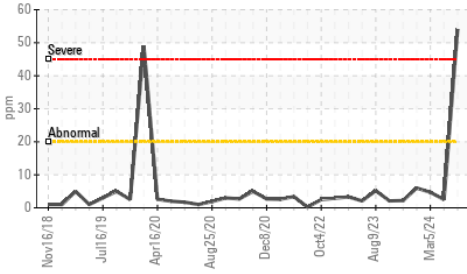


▲ Silicon (ppm)

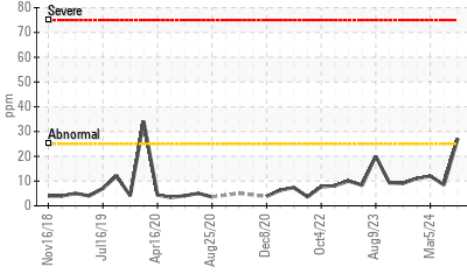


FT-IR (Direct Trend)

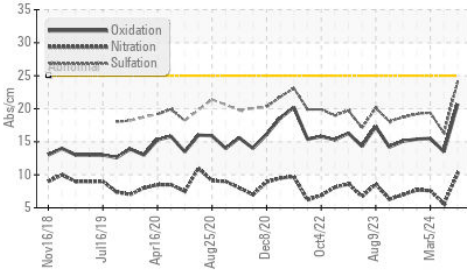

Base Number

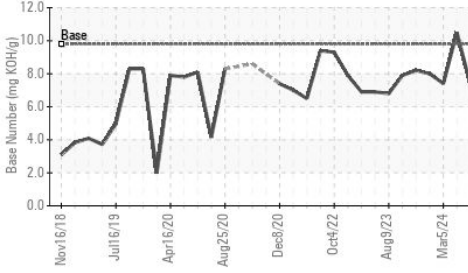

Viscosity @ 100°C

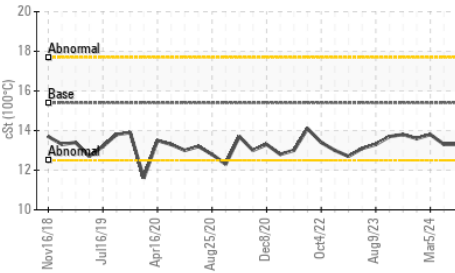

VISUAL


method	limit/base	current	history1	history2
White Metal	*Visual	NONE	NONE	NONE
Yellow Metal	*Visual	NONE	NONE	NONE
Precipitate	*Visual	NONE	NONE	NONE
Silt	*Visual	NONE	NONE	NONE
Debris	*Visual	NONE	NONE	NONE
Sand/Dirt	*Visual	NONE	NONE	NONE
Appearance	*Visual	NORML	NORML	NORML
Odor	*Visual	NORML	NORML	NORML
Emulsified Water	*Visual	>0.2	NEG	NEG
Free Water	*Visual	NEG	NEG	NEG

FLUID PROPERTIES


method	limit/base	current	history1	history2
Visc @ 100°C	ASTM D445	15.4	13.3	13.8

GRAPHS


Ferrous Alloys

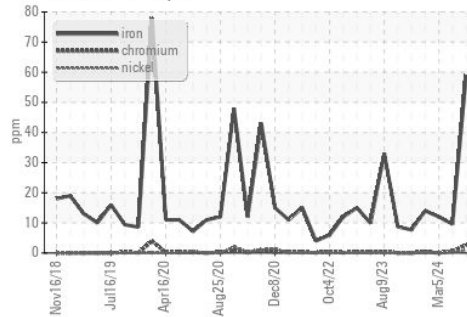


Non-ferrous Metals

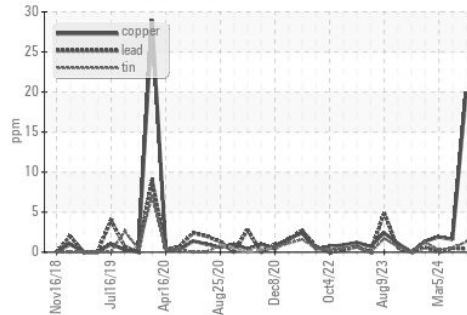

Viscosity @ 100°C

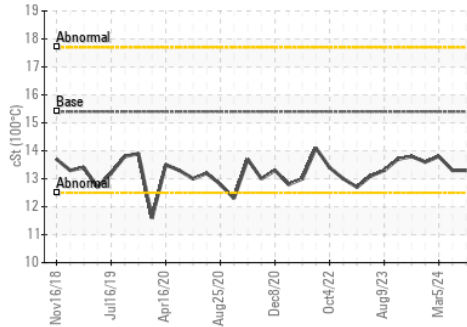

Base Number

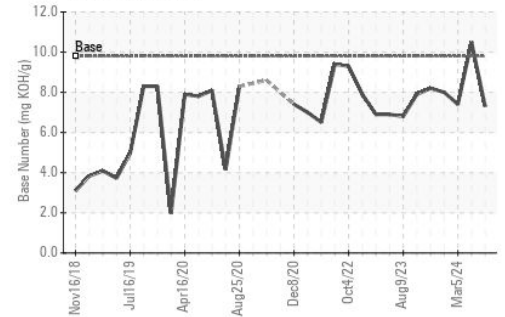

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : GFL0118478

Lab Number : 06202306

Unique Number : 11069767

Test Package : FLEET

Received : 06 Jun 2024

Tested : 10 Jun 2024

Diagnosed : 11 Jun 2024 - Jonathan Hester

GFL Environmental - 893 - OK East Hauling

2100 Lilly Street

Seminole, OK

US 74868

Contact: Roger Barlow

rbarlow@gflenv.com

T: (405)204-6183

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)