




OIL ANALYSIS REPORT

Sample Rating Trend

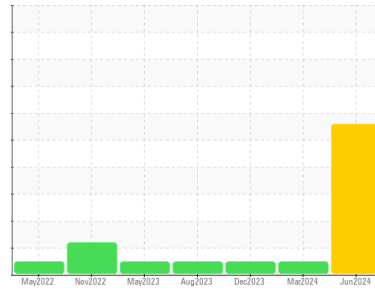

Area
(34C290)

Machine Id
812028

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. We recommend an early resample to monitor this condition.

Wear

Piston and cylinder wear is indicated.

Contamination

Sodium and/or potassium levels are high. Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress. Test for glycol is negative.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0118468	GFL0095308	GFL0104999
Sample Date	Client Info	04 Jun 2024	08 Mar 2024	21 Dec 2023
Machine Age	hrs	Client Info	0	5270
Oil Age	hrs	Client Info	0	4869
Oil Changed	Client Info	Not Chngd	Not Chngd	Not Chngd
Sample Status		ABNORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<1.0	<1.0	<1.0
Water	WC Method >0.2	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	▲ 102	71	42
Chromium	ppm ASTM D5185m >20	7	2	2
Nickel	ppm ASTM D5185m >4	2	0	0
Titanium	ppm ASTM D5185m	<1	<1	<1
Silver	ppm ASTM D5185m >3	<1	0	0
Aluminum	ppm ASTM D5185m >20	● 45	45	19
Lead	ppm ASTM D5185m >40	<1	<1	0
Copper	ppm ASTM D5185m >330	15	2	2
Tin	ppm ASTM D5185m >15	1	<1	0
Vanadium	ppm ASTM D5185m	<1	0	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	105	0	2
Barium	ppm ASTM D5185m 0	3	0	<1
Molybdenum	ppm ASTM D5185m 60	104	64	62
Manganese	ppm ASTM D5185m 0	5	<1	1
Magnesium	ppm ASTM D5185m 1010	792	967	911
Calcium	ppm ASTM D5185m 1070	1323	1091	1044
Phosphorus	ppm ASTM D5185m 1150	868	1021	1030
Zinc	ppm ASTM D5185m 1270	1024	1272	1226
Sulfur	ppm ASTM D5185m 2060	2775	3004	2775

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	▲ 52	11	9
Sodium	ppm ASTM D5185m	▲ 23	3	9
Potassium	ppm ASTM D5185m >20	▲ 116	73	30
Glycol	% *ASTM D2982	NEG	NEG	NEG

INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	0.5	1.8	1
Nitration	Abs/cm *ASTM D7624 >20	11.1	11.0	8.5
Sulfation	Abs/.1mm *ASTM D7415 >30	23.7	22.5	20.2


FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	20.8	16.8	14.8
Base Number (BN)	mg KOH/g ASTM D2896 9.8	7.1	7.9	8.5




OIL ANALYSIS REPORT


▲ Silicon (ppm)

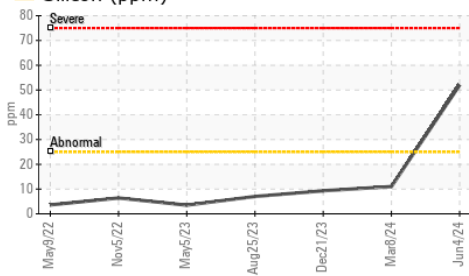


● Aluminum (ppm)

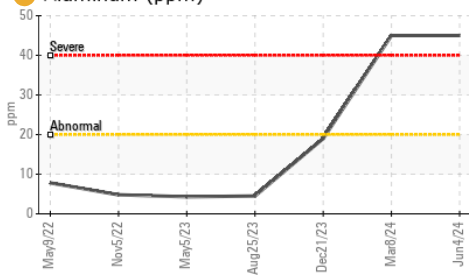


▲ FT-IR (Direct Trend)

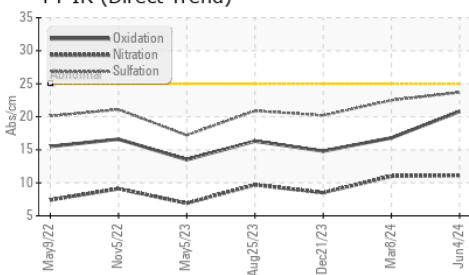

Glycol Contamination

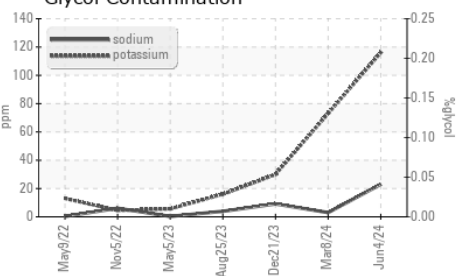

Base Number

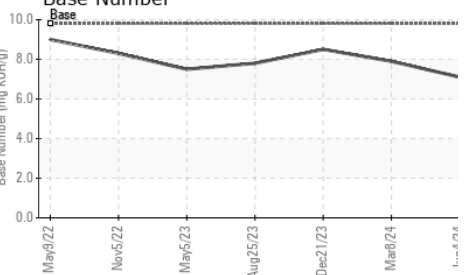


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.3	13.6

GRAPHS


▲ Ferrous Alloys

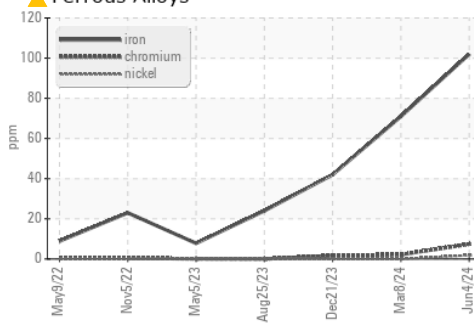


Non-ferrous Metals

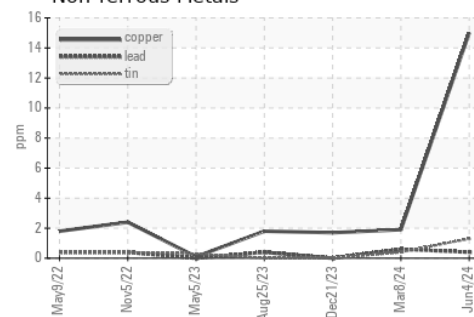

Viscosity @ 100°C

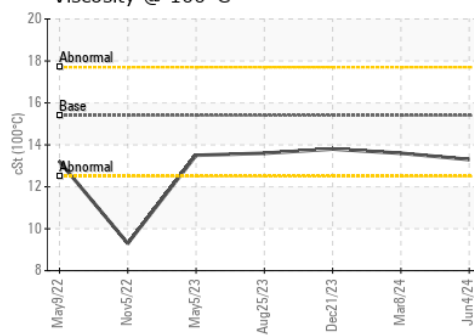

Base Number

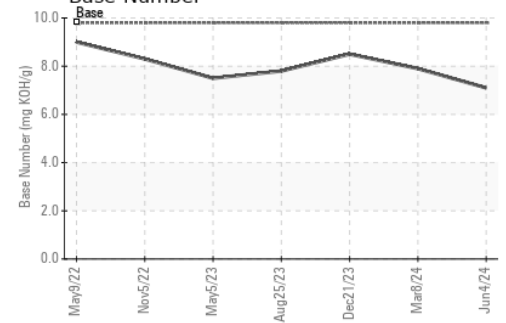

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : GFL0118468

Lab Number : 06202315

Unique Number : 11069776

Test Package : FLEET (Additional Tests: Glycol)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

GFL Environmental - 891 - Oklahoma City Hauling

1001 South Rockwell

Oklahoma City, OK

US 73128

Contact: Andy Smith

andrew.smith@gflenv.com

T: (405)306-1651

F: